

January 9, 2020

North Carolina Department of Transportation Geotechnical Unit Mail Service Center 1592 Raleigh, North Carolina 27699-1592

Attention: Mr. Craig Haden

email: <u>cehaden@ncdot.gov</u>

Reference: Preliminary Site Assessment Report NCDOT Project I-5878, WBS Element 53078.1.1 Parcel 87 – SAK's Thrift Avenue 101 South Sampson Avenue Dunn, Harnett County, North Carolina S&ME Project 4305-19-161

Dear Mr. Haden:

S&ME, Inc. (S&ME) is submitting this Preliminary Site Assessment (PSA) Report to the North Carolina Department of Transportation (NCDOT). This report presents the background/project information, field activities, findings, conclusions, and recommendations. These services were performed in general accordance with S&ME Proposal No. 43-1900576 REV-01 dated August 9, 2019, and Contract Number 7000018853 dated April 12, 2018 between NCDOT and S&ME, Inc., authorized by NCDOT in its September 5,2019 Notice to Proceed Letter.

Background/Project Information

Based on NCDOT's July 24, 2019, Request for Technical and Cost Proposal, the PSA was conducted within the NCDOT right-of-way (ROW) and/or easement as indicated on the preliminary plan sheets provided by NCDOT at the following property:

NCDOT Parcel No.	Property Owner	Site Address
87	Mack Devaughn Pope	(SAK's Thrift Avenue)
		101 South Sampson Avenue, Dunn, NC



The property is developed with a commercial building currently occupied by SAK's Thrift Avenue, a thrift shop. The property is not listed with registered petroleum underground storage tanks (USTs) (active or closed). The property is not listed with North Carolina Department of Environmental Quality (NCDEQ) Incidents associated with petroleum releases from USTs or aboveground storage tanks. A groundwater monitoring well identified as MW-30 is located on the property within the ROW. The monitor well is associated with a previous UST release (NCDEQ Incident #29119-Hasty Mart#38), that occurred at the former Hasty Mart #38 site located southwest of the site, across Sampson Avenue. The former Hasty Mart #38 site was the location of a former gasoline/convenience store and petroleum bulk oil facility, which utilized several USTs. The tanks were removed in 2012. Historically, several petroleum constituents have been reported in groundwater samples collected from MW-30 at concentrations exceeding their respective15A NCAC 2L Groundwater Quality Standards (2L Standards). In 2018, benzene was reported in MW-30 at a concentration of 3,320 micrograms per liter (µg/) which exceeds its 2L Standard of 1 µg/L (*Monitoring Report* prepared by TerraQuest dated April 24, 2018). Copies of pertinent information obtained from the above referenced report are included in **Appendix I.**

The PSA included a geophysical survey and subsequent limited soil sampling (three soil borings up to 10 feet below ground surface (ft.-bgs)) and limited groundwater sampling (one groundwater sample), within accessible areas of the proposed ROW/easement in preparation for construction activities. **Figure 1** shows the vicinity and site location, and **Figure 2** shows the site and boring locations. Soil and groundwater sampling results are shown on **Figure 3**.

Field Services

Prior to field activities, a site specific Health and Safety Plan was prepared as required by the Occupational Health and Safety Act (OSHA). Underground utilities were located and marked by the North Carolina One-Call Service. A private utility locator (East Coast Underground, LLC) was also used to locate and mark underground utilities.

Geophysical Survey

On July 25, 2019, S&ME completed Time Domain Electromagnetic (TDEM) and Ground Penetrating Radar (GPR) surveys within accessible areas of the proposed ROW/easement at Parcel 87. Brief descriptions of these complementary geophysical techniques are presented in the following paragraphs.

Time Domain Electromagnetics (TDEM)

TDEM measures the electrical conductivity of subsurface materials and discriminates between moderately conductive earth materials and very conductive metallic targets within the shallow subsurface. The conductivity is determined by transmitting a time-varying magnetic pulse into the subsurface and measuring the amplitude and phase shift of the secondary magnetic field. The secondary magnetic field is created when the conductive materials become an inductor as the primary magnetic field is passed through them. TDEM data are acquired continuously at a walking pace typically along a series of parallel or perpendicular lines. The system generates audible and visual indications when metallic targets are encountered. These measurements can also be supported with a global positioning system (GPS) which is output directly into the TDEM data file.

We used a Geonics Limited EM-61 MK2 TDEM system in general accordance with ASTM D6820 "Standard Guide for Use of the Time Domain Electromagnetic Method for Subsurface Investigation." Data was collected along lines



spaced at approximately five feet using a Juniper[®] Systems Geode[™] sub-meter GPS as positioning support. The approximate TDEM data collection paths are presented in **Figure 4.** Golden Software's Surfer[®] program was used to grid and plot the data (**Figures 5 and 6**). The TDEM data has been presented as Plots A and B in order to provide both opaque and semi-transparent views, respectively.

Ground Penetrating Radar (GPR)

GPR transmits electromagnetic waves into the subsurface from an antenna at a specific frequency and measures the time for wave reflections to be received by interfaces between materials with differing material properties (e.g. soil/metal, etc.). The intensity of the reflected GPR wave is a function of the contrast in the material properties (i.e. dielectric permittivity) at the interface, the conductivity of the material that the wave is traveling through, and the frequency of the signal.

We used a Geophysical Survey Systems, Inc. (GSSI) SIR[®] 4000 GPR system equipped with a 350 MHz antenna in general accordance with ASTM D6432 "*Standard Guide for Using the Surface Ground Penetrating Radar Method for Subsurface Investigation*" to further characterize anomalies/features identified during the TDEM survey.

A total of 10 GPR profiles (Lines 1 through 10) were collected for documentation (**Figure 7**). The data was post-processed using the GSSI Radan[®] 7 GPR software program for additional analysis.

Geophysical Findings

Responses indicative of a potential UST were not identified in the geophysical data sets collected at the site. Two anomalous features unrelated to known surficial targets were identified in the geophysical data sets (Anomaly A and B; **Figures 6 and 7).** Anomaly A is characterized by high amplitude GPR responses about three feet by five feet in size and located about two ft.-bgs. Although Anomaly A doesn't exhibit responses typically indicative of a large UST, this feature may be related to a buried metal drum or some other buried metallic object. Anomaly B is characterized by high amplitude GPR responses located about one foot bgs and may be related to a relatively small isolated buried metallic object. The anomalies were marked in the field using white spray paint. Example GPR profiles are presented in **Figures 8 and 9**.

Soil Sampling

On October 30, 2019, Troxler Geologic, Inc. (Troxler's) drill crew utilized a track mounted Geoprobe® rig to advance three soil borings (B-1 through B-3) and to collect soil samples within accessible areas of the proposed ROW/easement at Parcel 87. Soil boring B-2 was located near Anomaly A which was identified during the geophysical survey. The approximate location of the soil borings are shown in **Figure 2**. A photographic log is included in **Appendix II.** Troxler's drill crew advanced the Geoprobe® borings up to a depth of approximately 10 ft.-bgs. Soil samples were continuously collected in four-foot long disposable acetate-plastic sleeves that line the hollow stainless-steel sample probes. Soil recovered from the sleeves was classified on-site by S&ME personnel and screened with a Photoionization Detector (PID) at approximately two foot depth intervals to measure relative headspace concentrations of volatile organic compounds (VOCs).

VOC headspace readings were obtained from an aliquot of each soil sample that was placed in a re-sealable bag. Another portion of the sample was placed in a separate re-sealable bag and stored in an insulated container with



ice for possible laboratory analyses. After waiting approximately 15 minutes to allow the sample to reach ambient temperature and headspace equilibrium, the PID probe was inserted into the bag to obtain a headspace reading. A summary of the PID readings and logs of the soil borings are included in **Appendix III.**

Petroleum odors and elevated PID readings were not noted in the collected soil samples. Groundwater was measured in the existing onsite monitor well (MW-30) at a depth of 7.2 ft.-bgs. Therefore, a soil sample was selected from each boring at the four to six foot depth interval. The soil samples were placed into laboratory supplied containers and transported to RED Lab, LLC (Red Lab) in an insulated cooler with ice for analysis. A total of five soil samples (one soil sample per boring) were analyzed by RED Lab for TPH-GRO and TPH-DRO using ultra-violet fluorescence (UVF) spectroscopy with product (fuel) identification.

Soil Analytical Results

Based upon analytical results of soil samples analyzed by RED Lab using UVP spectroscopy, TPH-GRO and TPH-DRO were not reported at concentrations exceeding their respective North Carolina TPH Action Levels. TPH-GRO and TPH-DRO were reported in each boring at the four to six foot depth interval. TPH-GRO was reported at concentrations ranging from 2.9 milligrams per kilograms (mg/kg) to 4.3 mg/kg which is well below its North Carolina TPH Action Level of 50. TPH-DRO was reported at concentrations ranging from 1.5 mg/kg to 6.4 mg/kg which is well below its North Carolina TPH Action Level of 100 mg/kg. A summary of the soil analytical results is presented in **Table 1** and shown on **Figure 3**. A copy of the laboratory analytical report provided by RED Lab is presented in **Appendix IV**.

Groundwater Sampling

Groundwater was measured in the existing onsite monitor well located within the ROW at a depth of 7.2 ft.-bgs. Therefore, a groundwater sample was collected from MW-30. Groundwater was purged from MW-30 until relatively clear using disposable tubing attached to a peristaltic pump. The flow rate was reduced and laboratory supplied containers were filled directly from the tubing, labeled as MW-30 and placed in an insulated cooler with ice for transport to Con-Test Laboratories (Con-Test) for analysis of VOCs by EPA Method 8260 and polycyclic aromatic compounds (PAHs) by EPA Method 8270.

Upon completion of the soil and groundwater sampling, the soil borings were backfilled with bentonite pellets and soil cuttings. Investigative derived wastes (IDW), such as soil cuttings generated during the soil boring advancement and decontamination water, were spread on the ground in accordance with the procedures specified by NCDEQ. Used gloves and tubing were bagged and disposed off-site.

Groundwater Analytical Results

Based upon analytical results of the groundwater sample analyzed by Con-Test, several petroleum related target constituents were reported at concentrations exceeding their 2L Standards. Benzene was the highest constituent reported above its 2L Standard at a concentration of 1,200 μ g/L, which exceeds its 2L Standard of 1 μ g/L. A summary of the groundwater analytical results is presented in **Table 2** and shown on **Figure 3**. A copy of the laboratory analytical report provided by Con-Test is presented in **Appendix IV**.



Conclusion and Recommendations

Existing groundwater monitoring well identified as MW-30 is located on the property within the ROW. The well is associated with a UST release from (NCDEQ Incident #29119-Hasty Mart#38) located southwest of the site, across Sampson Avenue. Historically, several petroleum constituents have been reported in groundwater samples collected from MW-30 at concentrations exceeding their respective 2L Standards.

The geophysical survey identified two anomalous features (Anomaly A and B). Anomaly A doesn't exhibit responses typically indicative of a large UST, this feature may be related to a buried metal drum or some other buried metallic object. Anomaly B may be related to a relatively small isolated buried metallic object.

S&ME advanced three soil borings (B-1 through B-3) to a depth of up to approximately 10 ft.-bgs at the site. Soil boring B-2 was located near Anomaly A. Petroleum odors and elevated PID readings were not noted in soil samples collected at the borings. Selected soil samples from the soil borings were analyzed for TPH-GRO and TPH-DRO using UVF spectroscopy.

TPH-GRO and TPH-DRO were not reported at concentrations exceeding their respective North Carolina TPH Action Levels. TPH-GRO and TPH-DRO were reported in each boring at concentrations below their North Carolina TPH Action Levels.

Groundwater at monitor well MW-30 measured 7.2 ft.-bgs. A groundwater sample was collected from MW-30 and analyzed by Con-Test for VOCs by EPA Method 8260 and PAHs by EPA Method 8270. Several petroleum related target constituents were reported at concentrations exceeding their 2L Standards.

Based on the findings of the geophysical survey and analytical results of soil and groundwater samples, it is likely that during construction, NCDOT may encounter marginally impacted soil (below TPH Action Levels) and groundwater impacted with petroleum at the site.

It should also be assumed that saturated petroleum impacted soil will be encountered if construction excavations extend deeper than approximately seven ft.-bgs on the site. If construction dewatering is required, petroleum impacted groundwater must be properly disposed or treated at a licensed facility. If petroleum stained or odorous soils are encountered during construction, these soils should be properly handled and disposed at a licensed facility.

S&ME recommends maintaining an awareness level for the presence of marginally impacted petroleum in the soil (below TPH Action Levels) and groundwater at the site for the safety of workers and the public.



Limitations

The results of this preliminary investigation are limited to the boring locations presented herein. The results of this Preliminary Site Assessment are not all inclusive and may not represent existing conditions across the entire property. These results only reflect the current conditions at the locations sampled on the date this Preliminary Site Assessment was performed. This report has been prepared in accordance with generally accepted environmental engineering and geophysical practice for specific application to this project. The conclusions and recommendations contained in this report are based upon applicable standards of our practice in this geographic area at the time this report was prepared. No other warranty, expressed or implied, is made.

The geophysical methods used for this survey have inherent limitations. Site metallic features (e.g., reinforced concrete, utilities, etc.) and overhead transmission lines can produce a false electromagnetic response and may mask subsurface features. The depth of exploration of the GPR signal is highly site specific and is greatly limited by signal attenuation (absorption) of the subsurface materials. Signal attenuation is dependent upon the electrical conductivity of the subsurface materials. Signal attenuation is greatest in materials with relatively high electrical conductivities such as clay soils, and lowest in relatively low conductivity materials such as unsaturated sand. For this project location, the GPR data sets appear to have a maximum depth of penetration of about seven ft.-bgs.

Regardless of the thoroughness of a geophysical study, there is always a possibility that actual conditions may not match the interpretations. The results should be considered accurate only to the degree implied by the methods used and the method's limitations and data coverage. Accordingly, the possibility exists that not all features at a project site will be located due to either subsurface soil conditions or the occurrence of features outside the lateral limits and below the depth of penetration of the methods used. As with most surface geophysical methods, resolution of the subsurface will also decrease with depth. As such, the size and/or contrast of features compared to the imaged subsurface media must be significant enough to produce the anticipated response. The location and/or determination (or the lack thereof) of potential buried features is based on our review of the provided information and of the geophysical survey. Under no circumstances does S&ME assume any responsibility for damages resulting from the presence of subsurface features that may exist but were not identified by our survey.

This Preliminary Site Assessment was performed solely for NCDOT regarding the above-referenced site and assessment area. This report is provided for the sole use of NCDOT. Use of this report by any other parties will be at such party's sole risk. S&ME disclaims liability for any such use or reliance by third parties. The observations presented in this report are indicative of conditions during the time of the assessment and of the specific areas referenced.

	&

Closing

S&ME appreciates the opportunity to provide these services to you. If you have any questions or comments regarding this report, please contact us at your convenience.

Sincerely,

S&ME, Inc. DocuSigned by: Jamie Honeycutt 4C890EAEC25F488. Jamie T Honeycutt

Environmental Professional jhoneycutt@smeinc.com



Tom Kaymond D4B9FB5F636F4BB

DocuSigned by: Michael Phifer 861E52DDEEAE4C7

Michael W. Pfeifer Senior Project Manager mpfeifer@smeinc.com

Thomas P. Raymond, P.E., P.M.P. Senior Consultant traymond@smeinc.com

Attachments:

Table 1: Summary of Soil Sampling Results
Table 2: Summary of Groundwater Sampling Results
 Figure 1: Vicinity Map

Figure 2: Site Map Figure 3: Soil and Groundwater Constituent Map

- Figure 4: TDEM Path Location Plan
- Figure 5: TDEM Data Plot A
- Figure 6: TDEM Data Plot B
- Figure 7: Geophysical Anomaly Location Plan
- Figure 8: Example GPR Data Lines 2 and 3

NCDEQ File Review **Appendix I:** Appendix II Photographs Appendix III: Boring Logs

Tables



TABLE 1 SUMMARY OF SOIL SAMPLING RESULTS NCDOT Project I-5878 Parcel 87 - (SAK's Thrift Avenue) 101 South Sampson Avenue Dunn, Harnett County, North Carolina S&ME Project No. 4305-19-161

Ar	nalytical Metho	d→	Total Petroleum Hydrocarbons (TPH) Gaso Range Organics (GRO) and Diesel Range Organics (DRO) by Ultraviolet Fluorescen (UVF) Spectrometry							
Sample ID	Date	Contaminant of Concern→	TPH-GRO	TPH-DRO						
		Sample Depth (ftbgs)								
B-1	10/30/2019	4 to 6	3.2	6.4						
B-2	10/30/2019	4 to 6	2.9	4.5						
B-3	10/30/2019	4 to 6	4.3	1.5						
No	orth Carolina T	PH Action Levels	50	100						

Notes:

1. UVF analysis performed by RED Lab, LLC

2. Concentrations are reported in milligrams per kilogram (mg/Kg).

3. ft.-bgs:- feet below ground surface.

4. Concentrations exceeding the laboratory's reporting limits are shown in BOLD fields.

5. Concentrations exceeding the North Carolina TPH Action Levels are shown in Shaded and **BOLD** fields.

TABLE 2 SUMMARY OF GROUNDWATER SAMPLING RESULTS NCDOT Project I-5878 Parcel 87 - (SAK's Thrift Avenue) 101 South Sampson Avenue Dunn, Harnett County, North Carolina S&ME Project No. 4305-19-161

Analytical	Method→			Volati	ile Orga	nic Com	pound	s by EP	A Method	8260			Compound	: Aromatic s (PAHs) by hod 8270
Sample ID	Contaminant of Concern→ Date	Benzene	Diisopropyl Ether	Ethylbenzene	lsopropylbenzene	MTBE	Naphthalene	n-Propylbenzene	Toluene	1,2,4- Trimethylbenzene	1,3,5- Trimethylbenzene	Total Xylenes	Naphthalene	2-Methylnaphthalene
MW-30	10/30/2019	1,200	6.4 J	190	10 J	15 J	43	22	110	65	13 J	125	50	15
2L Standard (μg/L)		1	70	600	70	20	6	70	600	400	400	500	6	30
	GCL (µg/L)	5,000	70,000	84,500	25,000	20,000	6,000	30,000	260,000	28,500	25,000	85,500	6,000	12,500

Notes:

1. Analytes that are not shown for the method were not detected.

2. Concentrations are reported in micrograms per liter (μ g/L).

3. 2L Standard: North Carolina Groundwater Quality Standards: 15A NCAC 2L.0202

4. Concentrations exceeding the laboratory's reporting limits are shown in **BOLD** fields.

5. Concentrations exceeding the 2L Standards are shown in Shaded and BOLD fields.

6. GCL: Gross Contamination Level.

7. J: Estimated concentration detected below the reporting limit.

Figures

\wedge /			
\vee \land \land		The state of the s	N
FRI.		- of the	
(,)			
\times $\times/$			
\mathbf{N}			
NASHEALE	COLEST HELISAL		
TAK.			
И	COLEST - HEL		
	A A A A A A A A A A A A A A A A A A A		
	Hanne Lake		
	Hannas Lake	1	JONESBORO RD
	Hannas Lake	1	R
vva)	ne Avénue Eleméntáry Harnett	T	
	School: Primary School Start S		
Tal 1	ne Avenue Elementary School: Harnett Primary School i Bit Avenue i Bit Avenue Primary School i CaroLINA DR		EBRE
XXXP		2005	Shooteset
421	K John Jakes Jak K Land		80 55
XXX		XI	State Boole
A standard	THERE WE AND	0/ ~	
X	Dunn to the second seco		
W POPE ST			
A Star	the optimized of the second of		
		95	
ANIC	STE		
2 2 3		0	
> 7		5	
a start	N YON KI I X N X PERN Y V		
E danstrik	the set the set the set the set	It)	
TTT !		Stoni	
TART RO	A A A A A A A A A A A A A A A A A A A	E	-1-1
17419		Run	11 20
9 12	3 3 3	McLambs Pond	Lost 89
	3 3 3 3 - 5 - 5 - 5 - 5 - 5 - 5 - 5 - 5	200	
		1 L	
	15 5 X AN AN AN	2	
		55	1 + +/-
	A Star Star A Star A Star	He He He	Ningo Swally
200-			(++++ allp+++
1			
	S S S S S S S S S S S S S S S S S S S		
			4.4
	NRD PAR	a state a state	4.4
+ /	HACKSON I I	12	
Danik			4
101		and the state of t	4
- 1 /			1
+		the state of the state of the	
1		de-etc-the de de de de de fair	- and - and - and -
		ate attention attenti	
		a the state of the state of the	
	Y H H H H H H H H H H H H H H H H H H H	2 + 2 + 2 / 4 ×	4 - 3
		alle a far at	the state of the s
		1	the state
6 8		· · · · · · · · ·	± +
0	4,000 4,000	where	<pre>m</pre>
		and the set of the	+ + + +
P/	(FEET)		· ····
REFERENCE:		N	
	E OBTAINED FROM THE USGS NATIONAL TOPO MAP VIEWER. THIS		+ purch
	TIONAL PURPOSES ONLY. ALL FEATURE LOCATIONS DISPLAYED ARE		_ 1
	ARE NOT BASED ON CIVIL SURVEY INFORMATION, UNLESS STATED		Site Parcel
OTHERWISE.		1-	14
	<u>Σ</u> 7ΙΟΙΝΙΙΤΥΥ / Ν.Ι.Α.Ρ	SCALE:	FIGURE NO.
	VICINITY MAP	1 " = 2,000 '	
		DATE:	-
	NCDOT PROJECT I-5878	11-22-19	1
	PARCEL NO. 87 (SAKS THRIFT AVENUE)	PROJECT NUMBER	
	101 S. SAMPSON AVE., DUNN, HARNETT COUNTY, NORTH CAROLINA	4305-19-161	/
		• • · · · · · · · · · · · · · · · · · ·	

B-3 MACK DEVAUGHN POPE

B-2

Approximate extent of Gross Contamination Levels based on Monitoring Report by TerraQuest dated 04/24/18

LEGEND Geoenvironmental Boring:


ΞM

Map Source: NCDOT Project I-5986B Image Source: NC ONEMAP, Dated 2016

Existing Monitoring Well: O Known Soil Contamination: 🛛 🕅 Underground Storage Tank (UST): (UST) Possible Soil Contamination: 🏋 — s — 🏋 Existing Contamination Known - Water: 💢 — w — 🕱 Possible Groundwater Contamination: 2 - w - 2

SITE MAP

NCDOT Project: I-5878 PARCEL 87 - SAKs THRIFT AVENUE 101 S. Sampson Ave., Dunn, Harnett County, North Carolina

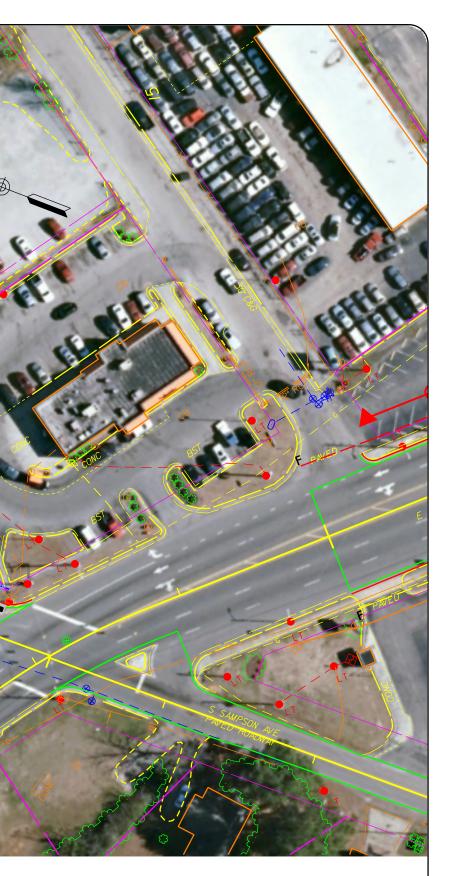

) 60	120
GRAPHIC SCALE	(IN FEET)
SCALE:	FIGURE NO.
1" = 60'	
DATE:	•
JAN. 2020	2
PROJECT NUMBER	
4305-19-161	
	GRAPHIC SCALE SCALE: 1" = 60' DATE: JAN. 2020 PROJECT NUMBER

B-3 (mg/kg) GRO 4 2 (ft-bgs) Sample Depth DRO 4-6 4.3 1.5

> **CEL 87** B-3 MACK DEVAUGHN POPE

B

B-2 (mg/kg) GRO 2 C (ft-bgs) Sample Depth DRO 4.5 4-6 2.9

B-1 (ft-bgs) Sample Depth (mg/kg) GRÒ DRO 4-6 3.2 6.4

Approximate extent of Gross Contamination Levels based on Monitoring Report by TerraQuest lated 04/2

<u>LEGEND</u> onmental Boring: 💮 Underground Storage Tank (UST): UST Map Source: NCDOT Project I-5986B

ΞM

Image Source: NC ONEMAP, Dated 2016

&

Existing Monitoring Well: O Known Soil Contamination: 😿 Possible Soil Contamination: 🎢 — s — 🎢 Existing Contamination Known - Water: 🏾 🕱 — w — 🧝 Possible Groundwater Contamination: $\mathcal{M} - w - \mathcal{M}$

SOIL AND GROUNDWATER CONSTITUENT MAP

NCDOT Project: I-5878 PARCEL 87 - SAKs THRIFT AVENUE 101 S. Sampson Ave., Dunn, Harnett County, North Carolina

MW-30 EPA Method 8260 Benzene **Disopropyl Ether** 6.4 Ethylbenzene Isopropylbenzene 10 MTBE Naphthalene 43# n-Propylbenzene Toluene 1,2,4-Trimethylbenzene 1,3,5-Trimethylbenzene Total Xylenes EPA Method 8270 Naphthalene 2-Methylnaphthalene

µg/L

50# 15


> Notes: mg/kg: Milligrams per Kilogram µg/L: Micrograms per Liter GRO: Total Petroleum Hydrocarbon Gasoline Range Organics DRO: Total Petroleum Hydrocarbon Diesel Range Organics TPH: Total Petroleum Hydrocarbon **BOLD***: Indicates Exceedance of NC TPH Action Levels **BOLD#**: Indicates Exceedance of 2L Groundwater Samples ft-bgs : Feet Below Ground Surface


Samples Collected 10-30-2019.


GRO/DRO Analyzed by Ultraviolet Fluorescence (UVF) by RED Lab, LLC.


0	60	120
GRAPHIC	SCALE	(IN FEET)
SC	ALE:	FIGURE NO.
1" :	= 60'	
Di	ATE:	0
JAN.	2020	3
PROJECT	NUMBER	
4305-	19-161	




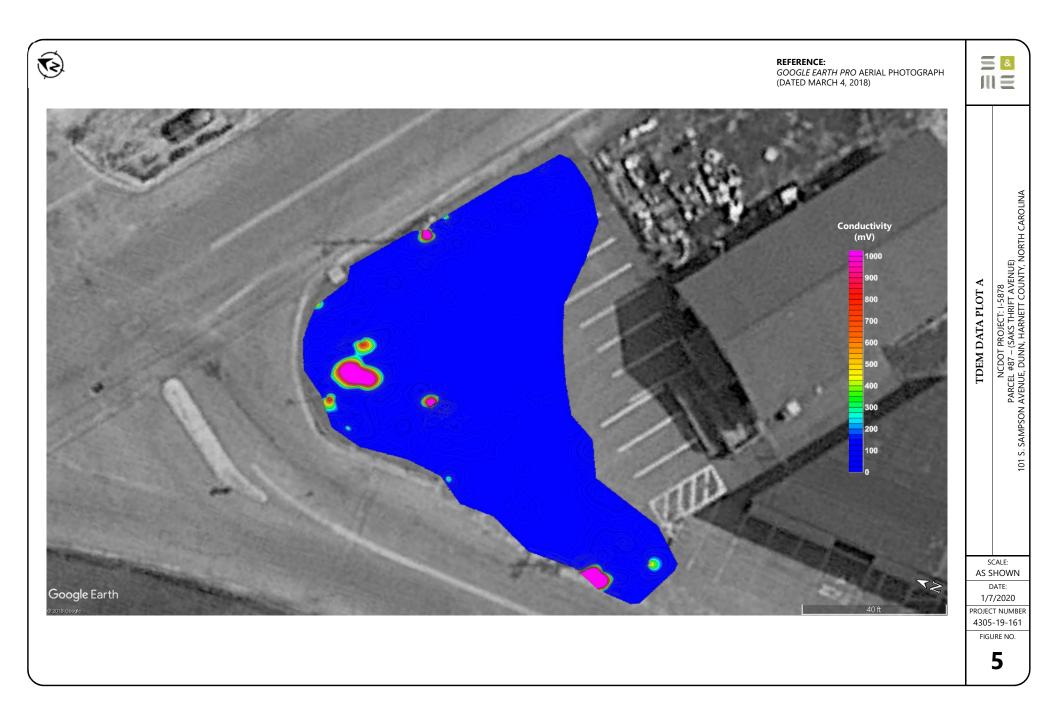

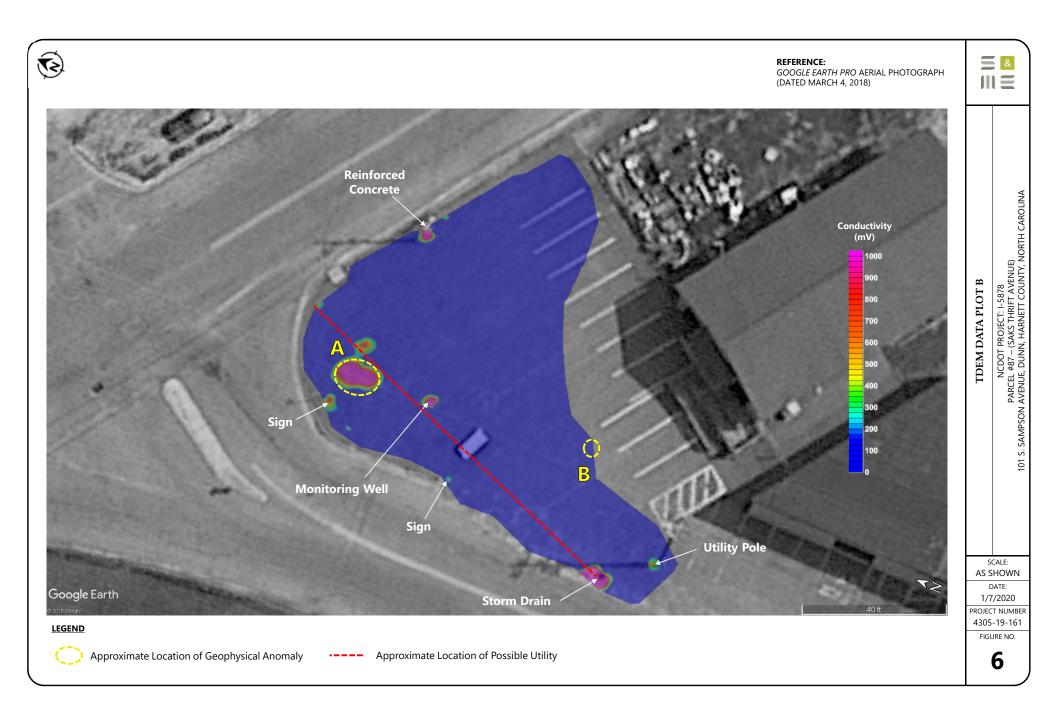

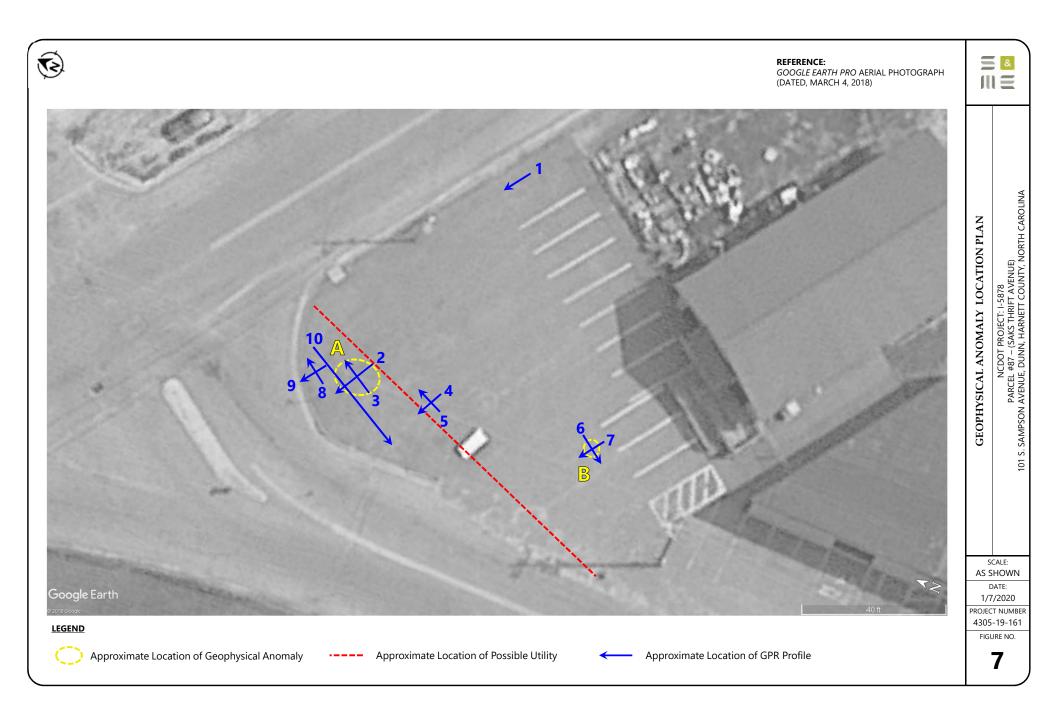

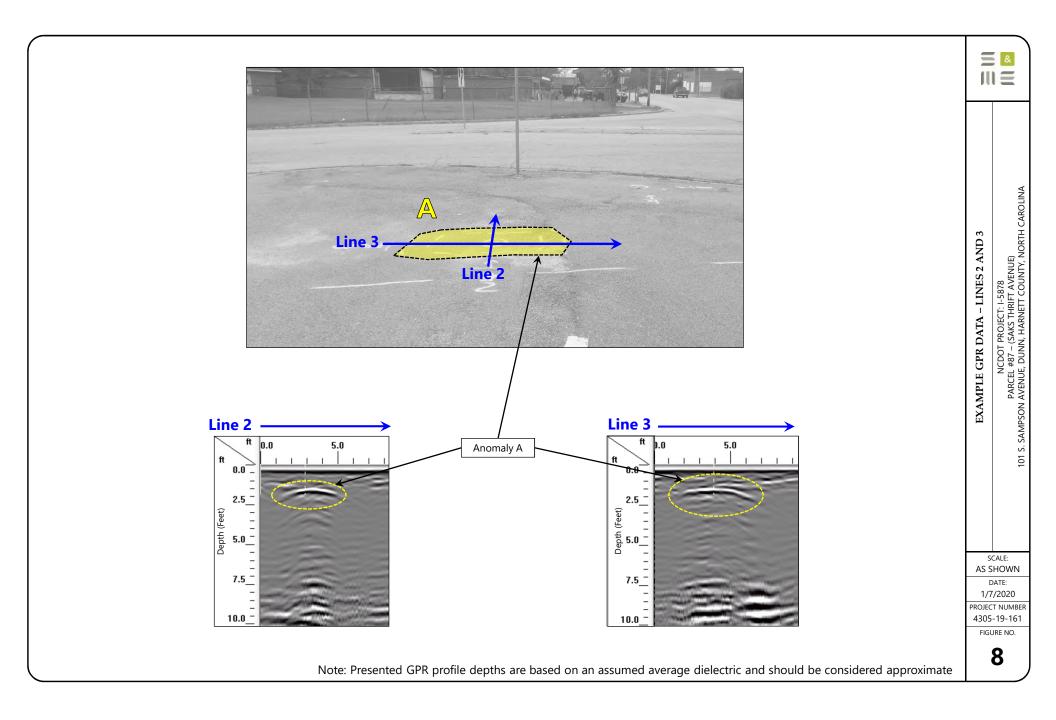

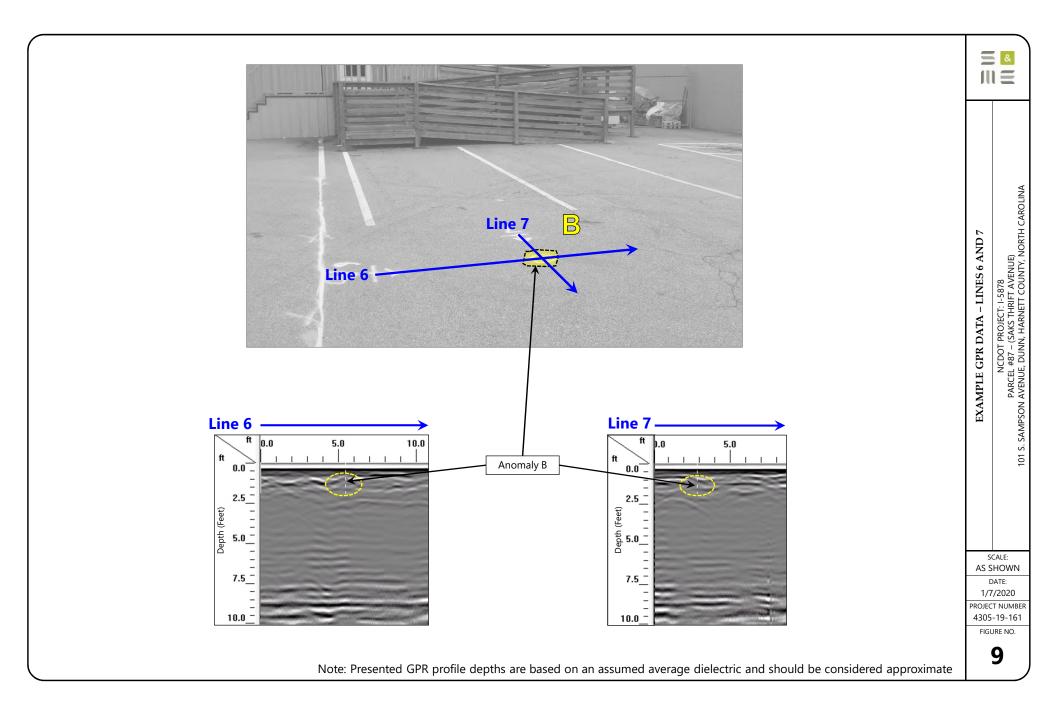

Appendix I – NCDEQ File Review



MONITORING REPORT.

(April 24, 2018 event)

HASTY MART No. 38 815 E. CUMBERLAND STREET DUNN, HARNETT COUNTY, NORTH CAROLINA, 28334

Latitude: 35.30274° N Longitude: 78.60203° W

Facility ID No. 0-009708 NCDWM-UST Incident No. 29119 NCDWM-UST Risk Ranking: INTERMEDIATE (170D)

Release Information: Date Release Discovered: 3/18/04 Estimated Release Quantity: Unknown Release Cause/Source: Leaking dispenser(s) and/or product line coupling(s) UST Capacities: (1) 10,000-gallon gasoline (2) 8,000-gallon gasoline (1) 20,000-gallon kerosene (1) 20,000-gallon diesel (3) 20,000-gallon gasoline

> <u>UST Owner/Responsible Party/Property Owner:</u> Wayne Oil Company, Inc. 1301 Wayne Memorial Drive Goldsboro, NC 27534

> > Terraquest Project No. 01404


May 22, 2018

The groundwater analytical data is summarized in Table 6 and on Figure 7. Historical groundwater analytical data is included in Appendix C that also contains concentration versus time graphs to show trending. The full analytical report is provided in Appendix D.

6.0 SOURCE ZONE DEPLETION STATUS

This release incident exists without corrective action goals at the current time. The presence of free product and GCL violations cause the Intermediate Risk ranking of the site. Following emergency response to the release incident where free product and gasoline vapors were present in the sanitary sewer, free product was recovered through several MMPE and AFVR events. Ultimately, the UST system was removed and a large volume of contaminated soil was removed including parts of the smear zone. The presence of storm sewer piping prevented the excavation of all contaminated soil. Following monitoring results that showed persistent free product and groundwater contamination, an air sparge pilot test was performed in April 2017 with favorable results.

The presence of free product and the groundwater contaminant plume have changed as shown:

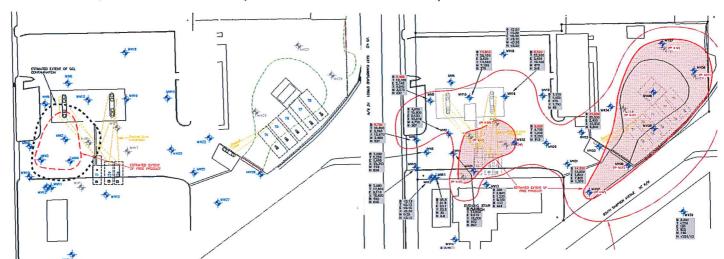


6/2004: (no bulk UST area data)


CSA 2011/2012:

Monitoring Report (4/24/18 event) By: Terraquest Environmental Consultants, P.C. Report Prepared: May 22, 2018 Wayne Oil Company, Inc. Hasty Mart No. 38 Dunn, NC

22

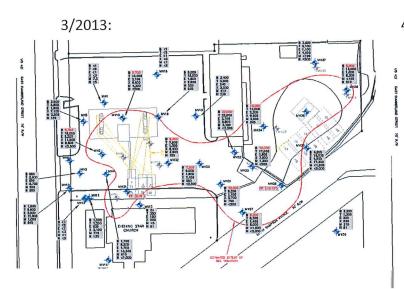



4/2014:

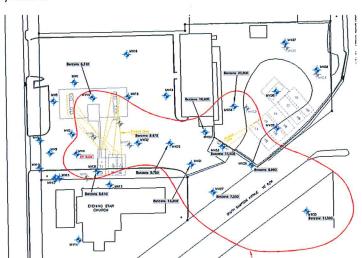



Strange

10/2015:

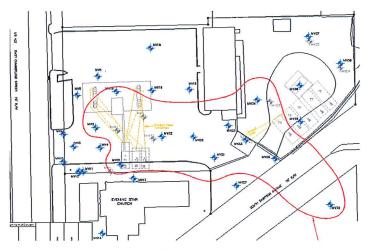

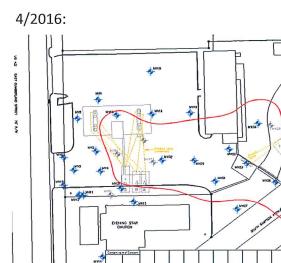


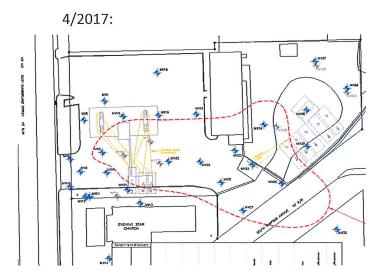

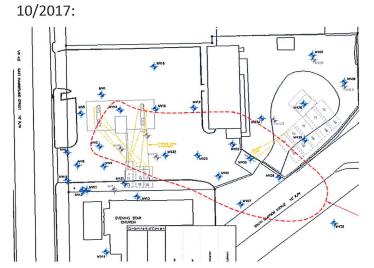

Monitoring Report (4/24/18 event) By: Terraquest Environmental Consultants, P.C. Report Prepared: May 22, 2018 Wayne Oil Company, Inc. Hasty Mart No. 38 Dunn, NC



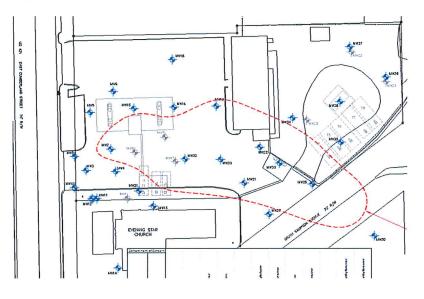

7.0 CONCLUSIONS AND RECOMMENDATIONS

Terraquest personnel have recently conducted a groundwater sampling event at the Hasty Mart #38 facility. Free product and GCL violations remain at the. Terraquest has had favorable results with an air sparge pilot test and recommends installing several sparge wells and operating a sparge system for at least six months to a year to reduce core contaminant concentrations. Terraquest recommends aggressive treatment of this plume to ensure human health and the environment are protected. Groundwater monitoring should continue.

8.0 LIMITATIONS

This report is limited to the investigation of petroleum-type compounds, and does not imply that other unforeseen adverse impacts to the environment are not present at the facility. In addition, subsurface heterogeneities not identified during the current study may influence the migration of groundwater or contaminants in unpredicted ways. The limited amount of sampling and testing conducted during this study cannot practically reveal all subsurface heterogeneities. Furthermore, the subsurface conditions, particularly groundwater flow, elevations, and water quality may very through time. The opinions and conclusions arrived at in this report are in


Facility ID No: 0-				29119	rt No. 38 Incident No.	Incident Name: Hasty Ma					ate: 4/24/18
Turning in the re-	Groundwater	Free Product	Depth to Water	Top of Casing			Casing	Well C			
	Elevation	Thickness	from Top of Casing	Elevation	Bottom of Well	Screened Interval	pth	Dep	Date Water		
Comments	(feet)	(feet)	(feet)	(feet)	(feet BGS)	(x to y feet BGS)	BGS)	(feet l	Level Measured	Date Installed	Weil ID
2"-diameter Type II monitoring	93.63	0	5.68	99.31	13	3 - 13	3	3	4/24/18	3/20/04	MW2
2"-diameter Type II monitoring	-	-	-	99.36	12	2 - 12	2	2	-	3/25/04	MW3
2"-diameter Type II monitoring	93.69	0	5.86	99,55	12	2 - 12	2	2	4/24/18	3/25/04	MW4
2"-diameter Type II monitoring	93.68	0	5.60	99.28	12	2 - 12	2	2	4/24/18	3/25/04	MW5
2"-diameter Type II monitoring	-	-	-	99.37	12	3 - 12	3	3	-	5/10/04	MW6
2"-diameter Type II monitoring	-	-	-	99.12	12	3 - 12	3	3	-	5/10/04	MW9
2"-diameter Type II monitoring	-	-	-	99.42	12	3 - 12	3	3	-	5/10/04	MW10
2"-diameter Type II monitoring	-	-	-	100.11	12	3 - 12	3	3	-	5/10/04	MW11
2"-diameter Type III monitoring	93.51	0	6.57	100.08	35	30 - 35	IC: 30	OC: 20	4/24/18	6/1 - 6/3/04	MW12
2"-diameter Type II monitoring	96.23	0	3.32	99.55	12	2 - 12	2	2	4/24/18	5/6/10	MW13
2"-diameter Type II monitoring	-	-	-	98.85	12	2 - 12	2	2	-	5/6/10	MW14
2"-diameter Type II monitoring	93.66	D	5.74	99.40	12	3 - 12	3	3	4/24/18	7/11/11	MW15
2"-diameter Type II monitoring	92.97	0	6.94	99.91	12	3 - 12	3	3	4/24/18	7/11/11	MW16
2"-diameter Type II monitoring	-	-	-	99.91	15	3-15	3	3	-	10/12/11	MW18
2"-diameter Type II monitoring	93.59	0	6.98	100.57	15	3-15	3	3	4/24/18	10/12/11	MW19
2"-diameter Type II monitoring	-	-	-	100.29	15	3-15	3	3	-	10/12/11	MW20
2"-diameter Type II monitoring	93.73	0	6.24	99.97	15	3-15	3	3	4/24/18	1/17/12	MW21
2"-diameter Type II monitoring	-	-	-	100.04	15	3-15	3	3	-	1/17/12	MW22
2"-diameter Type II monitoring	93.68	0	5.05	98.73	15	3-15	3	3	4/24/18	4/18/12	MW26
2"-diameter Type monitoring	93.72	0	5.05	98.77	15	3-15	3	3	4/24/18	4/18/12	MW27
2"-diameter Type II monitoring	-	-	-	99.40	15	3-15	3	3	-	10/4/12	MW28
2"-diameter Type II monitoring	-	-	-	99.48	15	3-15	3	3	-	10/4/12	MW29
2"-diameter Type II monitoring	92.75	0	6.63	99.38	15	3-15	3	3	4/24/18	10/4/12	MW30
2"-diameter Type II monitoring	95.53	0	4.50	100.03	15	3-15	3	3	4/24/18	3/20/13	MW31
2"-diameter Type II monitoring	93.68	0	6.27	99.95	15	3-15	3	3	4/24/18	3/20/13	MW32
2"-diameter Type II monitoring	93,66	0.13	6.15	99.72	15	3-15	3	3	4/24/18	3/20/13	MW33
2"-diameter Type II monitoring	93.86	0	6.07	99.93	15	3-15	3	3	4/24/18	3/20/13	MW34
2"-diameter Type II monitoring	93.79	0	5.90	99.69	15	3-15	3	3	4/24/18	3/20/13	MW35
2"-diameter Type II monitoring	93.91	0	5.62	99.53	15	3-15	3	3	4/24/18	3/20/13	MW36
2"-diameter Type II monitoring	-	-	-	99.87	15	3-15	3	3	u	3/20/13	MW37
2"-diameter Type II monitoring	-	-	-	99.68	15	3-16	L I	4	-	8/6/13	MW38
and the second				3 WELLS	NDONED MONITORIN	ABA					
2"-diameter Type II monitoring	- 1	-	-	100.00	18	8 - 18	3	8	-	3/20/04	MW1
2"-diameter Type II monitoring	-	-	-	99.74	12	3 - 12	3	3	-	5/10/04	MW7
2"-diameter Type II monitoring	-	-	-	99.67	12	3 - 12	3	3	-	5/10/04	MW8
2"-diameter Type II monitoring	-	-	-	99.82	12	3 - 12	3	3	-	7/11/11	MW17
2"-diameter Type II monitoring	-	-	-	99.92	15	3-15	3	3	-	4/18/12	MW23
2"-diameter Type II monitoring	-	-	-	99.52	15	3-15	3	3	•	4/18/12	MW24
2"-diameter Type II monitoring	-	-	-	99.82	15	3-15		3	-	4/18/12	MW25


All units in feet.
 BGS = Below Ground Surface

3. Groundwater elevations corrected for the presence of free product using (top of casing - depth to water) + (product thickness x 0.729).

ible 6 ate: 5/21/1	8						ARY OF GROUN Name: Hasty									Facility ID N	10: 0-0097(
Analytic	al Method	62008	6200B	62008	6200B	62008	62008	6200B	62008	6200B	6200B	6200B	62008	6200B	6200B	62008	6200B
Contamina	nt of Concern																
Well ID	Date Collected	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE	IPE	4-lsopropyltoluene	lsopropylbenzene	Naphthalene	n-Propylbenzene	Styrene	1,2,4-Trimethylbenzene	1,3,5-Trimethylbenzene	Acetone	Chloroform	1,2-Dichloroethane
MW2	4/24/18	6,040	18,600	3,670	21,500	3,840	308	294	286	1,040	478	410	4,040	1,070	268	< 32.0	< 18.0
MW4	4/24/18	151	465	327	4,350	209	< 9.20	241	130	900	193	< 7.40	3,830	1,440	< 35.0	< 16.0	< 9.00
MW5	4/24/18	1,230	1,090	865	2,063	1,160	55.8	37.5	41.5	158	77	< 1.85	, 685	193	< 8.75	< 4.00	< 2.2
MW12	4/24/18	< 0.160	< 0.0570	< 0.0920	< 0.122	< 0.169	< 0.0920	< 0.130	< 0.0980	< 0.0940	< 0.0650	< 0.0740	< 0.103	< 0.0870	< 0.350	< 0.160	< 0.09
MW13	4/24/18	< 0.160	< 0.0570	0.41	4.27	< 0.169	< 0.0920	< 0.130	< 0.0980	< 0.0940	1.15	< 0.0740	2.19	1.28	< 0.350	< 0.160	< 0.09
MW15	4/24/18	2,410	11,400	4,470	19,300	984	< 18.4	< 26.0	288	944	424	< 14.8	3,080	922	< 70.0	< 32.0	< 18.
MW16	4/24/18	2,670	15,900	3,130	13,410	258	< 9.20	151	160	663	273	214	2,110	622	< 35.0	34	< 9.0
MW19	4/24/18	8,780	17,800	1,610	8,140	1,330	< 9.20	152	141	562	218	207	1,530	512	< 35.0	< 16.0	< 9.0
MW21	4/24/18	9,440	7,900	600	5,270	386	< 18.4	< 26.0	< 19.6	810	< 13.0	< 14.8	970	436	< 70.0	< 32.0	< 18.
MW26	-					Fl	REE PRODUC	T NOTED IN	BAILER WHE	N PURGING	ATTEMPTED	- NO SAMPI	LE				
MW27	4/24/18	2,500	1,490	1,120	4,370	47.8	10.3	46.5	69.5	480	144	< 1.85	1,440	425	< 8.80	< 4.00	16.
MW30	4/24/18	3,320	338	445	1,154	88.5	27.5	36.8	35.5	135	50.3	< 1.85	279	75	< 8.75	< 4.00	< 2.2
MW31	4/24/18	9.98	0.71	7.62	6.78	< 0.169	< 0.0920	1.98	1.62	7.6	4.69	< 0.0740	14.4	10.6	< 0.352	< 0.160	< 0.05
MW32	4/24/18	8,320	10,400	1,390	6,970	2,400	< 18.4	< 26.0	< 19.6	798	248	376	894	370	< 70.0	< 32.0	< 18.
MW33	-							0.	13 FEET OF P	REE PRODU	ст						
MW34	4/24/18	2,490	4,100	277	1,848	527	< 9.20	< 13.0	112	376	118	185	319	172	< 35.0	< 16.0	< 9.0
MW35	4/24/18	644	5,320	1,360	11,100	< 4.23	< 2.30	44.5	65.8	673	149	< 1.85	2,120	684	< 8.75	< 4.00	< 2.2
MW36	4/24/18	38.3	45.6	17	73.6	< 0.169	< 0.0920	1.63	1.83	9.44	3.05	1.93	33.7	12.4	< 0.352	< 0.160	< 0.09
	2L Standard	1	600	600	500	20	70	25	70	6	70	70	400	400	6,000	70	0.4
	GCL	5,000	260,000	84,500	85,500	20,000	70,000	NE	25,000	6,000	30,000	70,000	28,500	25,000	6,000,000	70,000	400
Bold deno	in ug/l = parts p tes a detection enotes a GCL vic		ob)														

4. < - denotes less than sample detection limit.

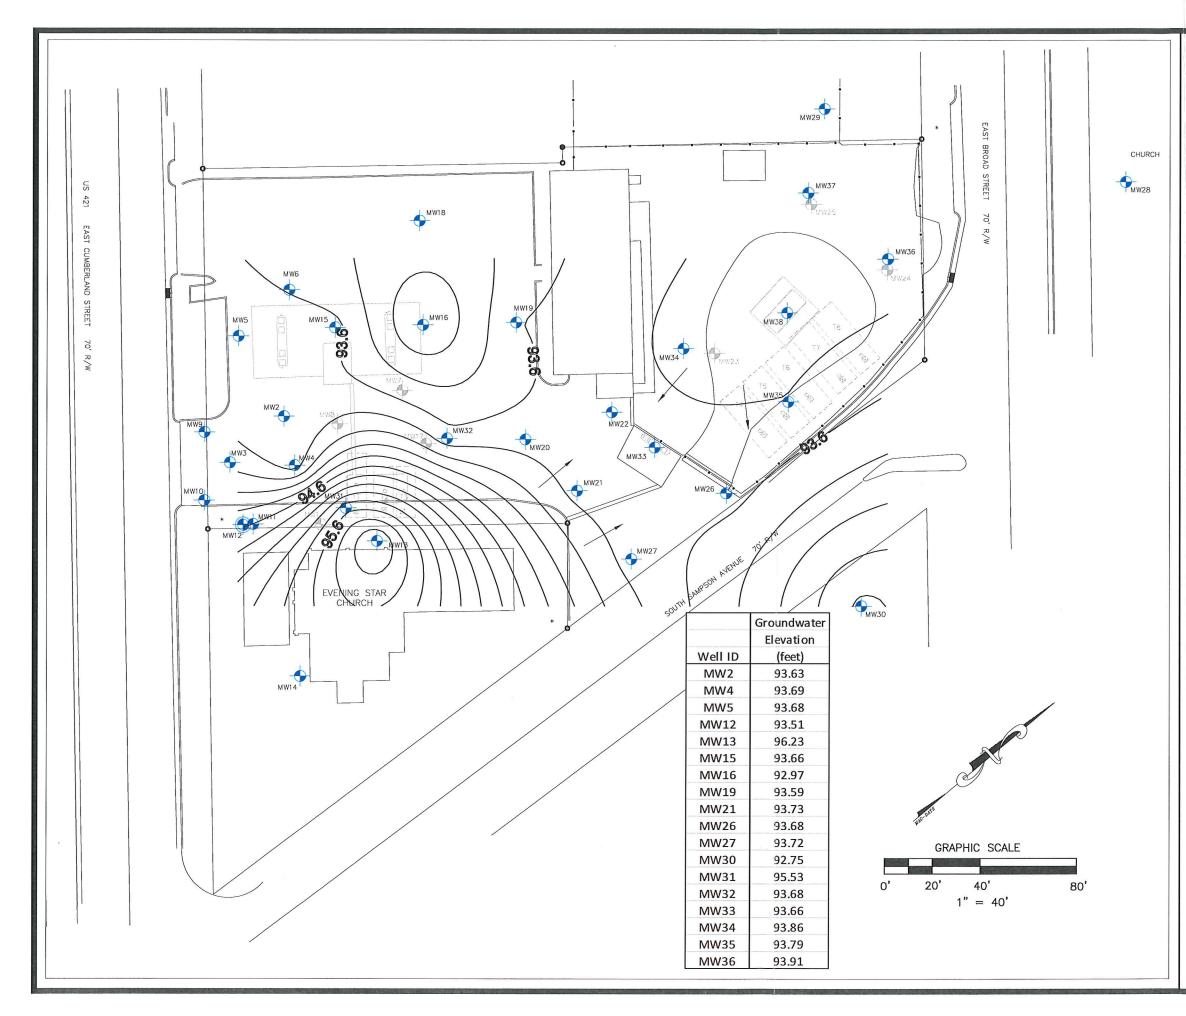



LEGEND

The groundwater elevation as measured on 4/24/18 is listed in feet.

The groundwater flow direction is indicated by the arrows placed perpendicular to the contour lines. There is a very low local hydraulic gradient.


The Type III monitoring well MW12 was not used in the construction of this map.

POT	ENTIOME	TRIC SURF	POTENTIOMETRIC SURFACE MAP (4/24/18)	/24/18)	
		HASTY M,	HASTY MART No. 38		
		815 E. Cum.	815 E. Cumberland Street		
		Dunn, N	Dunn, NC 28334		
WAYNE OIL COMPANY, INC.	MPANY, IN			õ	GOLDSBORO, NC
PROJECT NO: 01404		CHECKED BY: MJB	MJB	FIGURE NO.	4
SCALE: 1'	1"=40'	DRAWN BY:	DRAWN BY: MJB/JAK/RDK DATE:		5/3/18
					A REAL PROPERTY AND A REAL



Note: MW1 — MW5 Elevations & Locations Were Surveyed By Joyner Piedmont Surveying. MW6 — MW30 Were Surveyed By TerraOuest Environmental Consultants.

APRIL 15, 2004

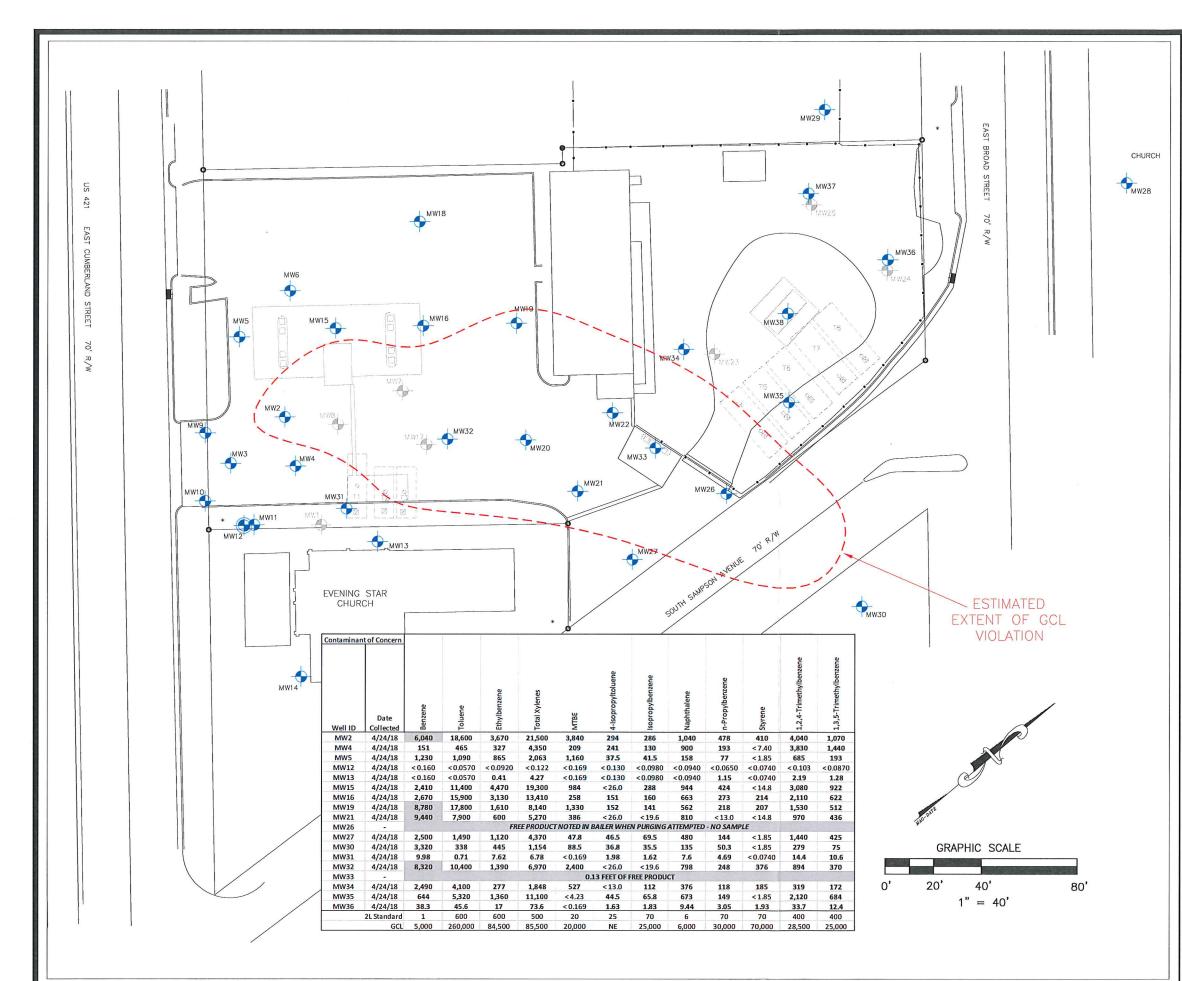



	for eve Anc in rep of	4/2 eve				
Note: MV1 - MV5 Elevations & Locations Ware Surveyed By Joyner Piedmont Surveying. Word Surveyed By TerroDuest Environmental Environmental	torical results were considered wells not sampled during this ent. Dytical results are summarized Table 6 and the full analytical ort is provided in Appendix D the April 2018 Monitoring port.	ect analytical results for the 24/18 groundwater sampling ant are provided in ug/L.		LEGEND	VICINITY MAP	
TERRAquest	GR	OUNDWATER H 815	GROUNDWATER ANALYTICAL RESULTS (4/24/18) HASTY MART No. 38 815 E. Cumberland Street	RESULT 38 Street	S (4/24/	8)
	WAYNE OIL COMPANY, INC.	MPANY, INC.		t	COL	GOLDSBORO, NC
	PROJECT NO: 01404		CHECKED BY: MJB		FIGURE NO.	7
ENVIRONMENTAL CONSULTANTS, P.C.	SCALE: 1'	1"=40' DR	DRAWN BY: MJB/JAK/RDK	<td>DATE:</td> <td>5/18/18</td>	DATE:	5/18/18

								Cor			alytical Data H No. 38, Dunn,		V30				8					
	,									Wayne	Oil Company											
Date	U.S. EPA Method	Benzene	Toluene	Ethylbenzene	Total Xylenes	MTBE	Эd	sec-Butylbenzene	4-Isopropyltoluene	lsopropylbenzene	Naphthalene	n-Propylbenzene	Styrene	1,2,4-Trimethylbenzene	1,3,5-Trimethylbenzene	Acetone	C5-C8 Aliphatics	C9-C18 Aliphatics	C19-C36 Aromatics	C9-C22 Aromatics	Lead	EDB
10/4/12	6200B 6200B	2,200	<250	190	620	180	73	-	-	<50	42	÷.	-	130	<50	<	7,700	1,800	<100	550	6.7	<0.010
3/25/13 8/13/13	6200B	3,200 10,500	1,300 16,800	300 2,120	930 10,390	210 1,860	59 652	-	-	11 50.7	81 494	-	-	190	45	<	-	-	-	-	-	-
4/8/14	6200B	11,500	5,940	1,470	5,380	923	297	6.9	5.9	56.2	494	155	19.3	2,170 1,220	258 302	< <	-	-	-	-	-	-
10/19/15	6200B	5,560	2,500	610	1,960	129	50	<1.20	<1.78	24.6	197	64.2	<1.48	417	98.6	<	-	-	-	-	-	-
4/21/16	6200B	7,360	1,570	931	2,617	130	47	<1.84	<1.78	36.4	268	98.2	<1.48	673	159	<	-	-	-	-	-	-
11/2/16	6200B	2,820	842	313	897	32	<9.2	<9.2	<8.9	<9.8	271	31	<7.4	196	49	<	-	-	-	-	-	
4/18/17	6200B	1,680	96	201	158	33	17	<	<4.45	<4.90	146	23	<3.70	59	8.5	122	~	-	-	-	-	
10/30/17 4/24/18	6200B 6200B	994 3.320	20 338	100 445	81 1,154	<4.22 88.5	<2.30 27.5	< <	< 36.8	37.5 35.5	101 135	10.2 50.3	<1.85 < 1.85	42.5 279	34 75	< < 8.75	-	-	-	-	-	-
4/24/10	2L Standard	1	600	600	500	20	70	70	25	70	6	70	70	400	400	6,000	400	700	10,000	200	- 15	0.02
	GCL	5,000	260,000	84,500	85,500	20,000	70,000	8,500	NE	25,000	6,000	30,000	70,000	28,500	25,000	6,000,000	NE	NE	NE	NE	15,000	50
	 3: Analytical reports of 4: <= less than the sp 5. Naphthalene was to 6. "NE" - Not establish 	pecified sar ested by m	nple detection	on limit.																		
			8																			
16,000																						
14,000			/	/																		
12,000		- /		1		-																
10,000		_/	K		1																	
8,000		-11	/																			
6,000		11				-																
4,000		//																-				
2,000														-		-					_	-
2,000		and the second second														-						
0 🧦	A DESCRIPTION OF THE OWNER OWNER OF THE OWNER OWNE																No. of Concession, Name	-				
10122012	221-2012 2140013 ALVEOL	611/2013	612/2013 1012/20	13 12/1/2013	212/2014 412/2	614 6122014	8/1/2014 10/1	2014 1212010	211/2015	11/2015 611/201	5 811/2015 1011	2015 12/1/2015	112016 a1120	611/2016	811/2016 IOL	12016 12/1/2016	212/2027 41	12017 61120	17 811/2017 101	112017 12/1120	211/2018	11/2018


Appendix II – Photographs



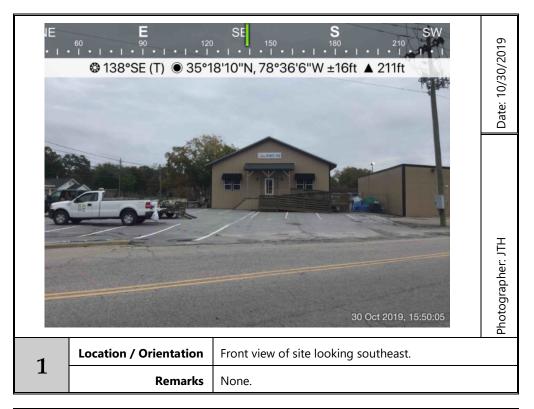

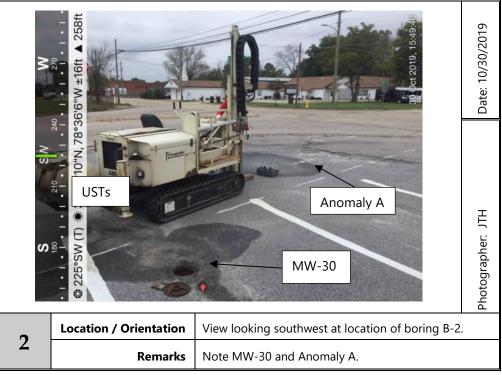



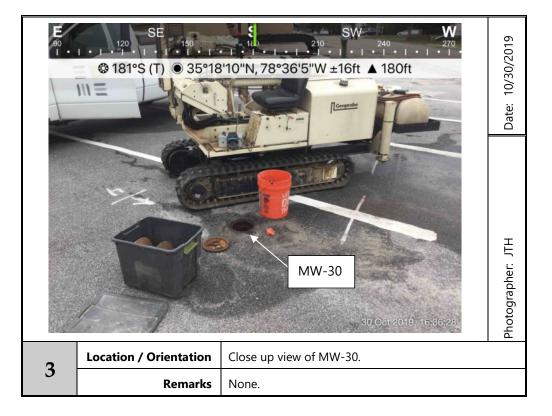

Appendix III – Boring Logs

PROJECT:	NCDOT I-5878											
	Parcel 87-101 South Sampson Avenue (SAK's Thrift Avenue), Dunn, NC S&ME Project No. 4305-19-161		BORING LOG: B-1									
DATE DRILLED:	Wednesday, October 30, 2019	BORING DEPTH (FT):	8									
DRILL RIG:	Geoprobe 54DT	WATER LEVEL:										
DRILLER:	Troxler Geologic, Inc.	CAVE-IN DEPTH:	Not Applic	cable								
HAMMER TYPE:	Not Applicable	LOGGED BY:	J. Honeycı	utt								
SAMPLING METHOD:	Macro-Core Sampler	NORTHING:										
DRILLING METHOD:	Macro-Core Sampler (3-in. OD)	EASTING:										
DEPTH (feet) GRAPHIC LOG	MATERIAL DESCRIPTION		WATER LEVEL	SAMPLE	PID READING (PPM)	LABORATORY ANALYSES	Sample Time / 1st 6in	2nd 6in	3rd 6in	N VALUE		
			WATEF	SAN	PID RE (PF	LABOF ANA	Sample 1st	2nc	3rd	N N		
Aspl	halt, Gravel, dy Clay, Gray, Tan, Orange,		-		5.6	No						
			-		5.0	No						
5					6.2	No						
					5.5	Yes	1530					
Bori	ng Terminated at 8 Ft-BGS											
10												
15 —— ——												
20 —												
25 —												
30												

PROJECT: NCDOT I-5878											
	Parcel 87-101 South Sampson Avenue (SAK's Thrift Avenue), Dunn, NC S&ME Project No. 4305-19-161		BORING LOG: B-2								
DATE DRILLED:	Wednesday, October 30, 2019	BORING DEPTH (FT):	8								
DRILL RIG:	Geoprobe 54DT	WATER LEVEL:									
DRILLER:	Troxler Geologic, Inc.	CAVE-IN DEPTH:	Not Appli	cable							
HAMMER TYPE:	Not Applicable	LOGGED BY:									
SAMPLING METHOD:	Macro-Core Sampler	NORTHING:									
DRILLING METHOD:	Macro-Core Sampler (3-in. OD)	EASTING:									
DEPTH (feet) GRAPHIC LOG	MATERIAL DESCRIPTION		WATER LEVEL	SAMPLE	PID READING (PPM)	LABORATORY ANALYSES	Sample Time / 1st 6in	2nd 6in	3rd 6in	N VALUE	
Aspl	nalt, Gravel, dy Clay, Gray, Tan, Orange,				6.7	No					
					9.6	No					
5	ey Sand, Gray,				9.0	Yes	1545				
	ng Terminated at 8 Ft-BGS										
10											
15 —											
20											
25 —											
30											

PROJECT:	NCDOT I-5878 Parcel 87-101 South Sampson Avenue (SAK's Thrift Av	venue) Dunn NC			BORIN	NG LOG:	- B-3			
	S&ME Project No. 4305-19-161	venue), buin, rve			DOM		0-5			
DATE DRILLED:	Wednesday, October 30, 2019	BORING DEPTH (FT):	8							
DRILL RIG:	Geoprobe 54DT	WATER LEVEL:								
DRILLER:	Troxler Geologic, Inc.	CAVE-IN DEPTH:	Not Appl	icable						
HAMMER TYPE:	Not Applicable	LOGGED BY:								
SAMPLING METHOD:	Macro-Core Sampler	NORTHING:								
DRILLING METHOD:	Macro-Core Sampler (3-in. OD)	EASTING:								
DEPTH (feet) GRAPHIC LOG	MATERIAL DESCRIPTION		WATER LEVEL	SAMPLE	PID READING (PPM)	LABORATORY ANALYSES	Sample Time / 1st 6in	2nd 6in	3rd 6in	N VALUE
Contraction Contra	ıalt, Gravel, Iy Clay, Gray, Tan, Orange,				4.5	No				
5					6.7 8.6	No Yes	1600			
					0.0	165				
Borii	ng Terminated at 8 Ft-BGS									
10										
15										
20 —										
25 —										
30										

Appendix IV – Laboratory Analytical Reports and Chain of Custody


Address:	S&ME 3201 SPRING FOREST RD RALEIGH NC								Sar Sample Sample		acted		Wednesday, October 30, 2019 Wednesday, October 30, 2019 Friday, November 1, 2019
Contact:	JAMIE HONEYCUTT									Ор	erator		MAX MOYER
Project:	NCDOT I-5878 PARCEL 87												
Matrix	Sample ID	Dilution used	BTEX (C6 - C9)	GRO (C5 - C10)	DRO (C10 - C35)	TPH (C5 - C35)	Total Aromatics (C10-C35)	16 EPA PAHs	BaP	Q	% Ratios	5	U00902 HC Fingerprint Match
										C5 - C10	C10 - C18	C18	
S	B-1 (4-6')	20.8	<0.52	3.2	6.4	9.6	3.9	<0.17	<0.021	67.4	26.1	6.5	Deg Fuel 90.8%,(FCM)
S	B-2 (4-6')	20.3	<0.51	2.9	4.5	7.4	2.5	<0.16	<0.02	74.9	19.4	5.7	Deg.Fuel 88.6%,(FCM)
S	B-3 (4-6')	20.2	<0.5	4.3	1.5	5.8	0.96	<0.16	<0.02	92.4	6	1.6	No Match found
	Initial C	alibrator (QC check	ОК					Final FC	:M QC	Check	OK	99.5 %
Abbreviation B = Blank D	on values in mg/kg for soil samples and mg s :- FCM = Results calculated using Funda rift : (SBS)/(LBS) = Site Specific or Library I imated aromatic carbon number proportion	amental Calil Background	oration Mod Subtraction	e : % = confic applied to res	lence of hydro sult : (BO) = E	ocarbon identi Background O	fication : (PFM) = Poor Fir ed : (OCR) =	ngerprint Mat	tch : (T) I range :	= Turbid	: (P) = F	Particulate detected




Hydrocarbon Analysis Results

Project: NCDOT I-5878 PARCEL 87

QED Hydrocarbon Fingerprints

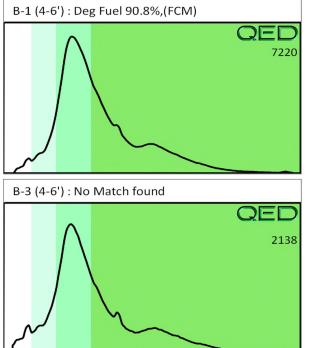

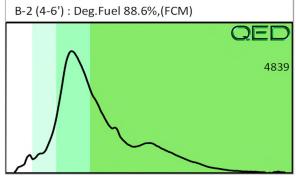

							K143		
Client Name:				10001			KED Lab, LLC	TC	
Addrace.	hund	Forest the			DUNNU NC		5598 Marv	5598 Marvin K Moss Lane	ane
Addi 533.	Padaja he					TM	MARBION	MARBIONC Bldg, Suite 2003	e 2003
Contact:	Tamie T Henerott	书)				Wilmingto	Wilmington, NC 28409	6
Project Ref .:	NCOCT I-5878 (Parced 37	2				Each UVF sal	Each UVF sample will be analyzed for	nalyzed for
Email:	Unoversité Shéine.com	INC.COM					aromatics ar	נטנפו BTEA, פורט, טורט, דרח, ראח נטנפו aromatics and BaP_Standard GC	1, PAH LOLAI
Phone #:	קופ בתיד-תבנא		RAPI	D ENVIR	RAPID ENVIRONMENTAL DIAGNOSTICS	NOSTICS	Analyses are	Analyses are for BTEX and Chlorinated	Chlorinated
Collected by:	Jamiet Hones						Solvents: VC trans DCE, To	Solvents: VC, 1,1 DCE, 1,2 cis DCE, 1,2 trans DCE, TCE, and PCE. Specify target	cis DCE, 1,2 pecify target
		CHAIN	I OF CU	STODY	AND ANALYTICA	CHAIN OF CUSTODY AND ANALYTICAL REQUEST FORM	analytes in tl	analytes in the space provided below.	ided below.
Sample Collection			Analysis Type	Initials	San	Sample ID	Total Wt.	Tare Wt.	Sample Wt.
Date/Time	24 Hour 48 Hour	r UVF	ပ္ပ				56.8		
10-30-19/ 1530	>	7		JIH	B-1 4-6'		BUNK	44.3	12.5
1 1545		_		_	7.2 4.6		SYS	L'HH	12.3
J 11600	>	>			B.3 4-6		57.6	イィーフ	12.9
1									
						~			
					~ .				
								X	
COMMENTS/REQUESTS:	JESTS:				TARGET GC/UVF ANALYTES:	/TES:			
Relind	Relinguished by			Accepted by	ed by	Date/Time	REI	RED Lab USE (ONLY
Janes Newsrald	131/19	1500		1 WW	11/19	1150		C	
Reling	Kelinquished by			Accepted bý	ed bý	Date/Time	2	0	
							Ref. No)	
					-				



November 20, 2019

Jamie Honeycutt S&ME, Inc - Raleigh, NC 3201 Spring Forest Rd. Raleigh, NC 27616

Project Location: Dunn, NC Client Job Number: Project Number: 4305-19-161 Laboratory Work Order Number: 19K0023

Enclosed are results of analyses for samples received by the laboratory on October 31, 2019. If you have any questions concerning this report, please feel free to contact me.

Sincerely,

Beny K. Millee

Kerry K. McGee Project Manager

Table of Contents

Sample Summary	3
Hits Only Report	4
Case Narrative	5
Sample Results	6
19K0023-01	6
Sample Preparation Information	9
QC Data	10
Volatile Organic Compounds by GC/MS	10
B245122	10
Semivolatile Organic Compounds by GC/MS	15
B245268	15
Flag/Qualifier Summary	17
Certifications	18
Chain of Custody/Sample Receipt	21



39 Spruce Street * East Longmeadow, MA 01028 * FAX 413/525-6405 * TEL. 413/525-2332 S&ME, Inc - Raleigh, NC 3201 Spring Forest Rd. REPORT DATE: 11/20/2019 Raleigh, NC 27616 PURCHASE ORDER NUMBER: ATTN: Jamie Honeycutt PROJECT NUMBER: 4305-19-161 ANALYTICAL SUMMARY 19K0023 WORK ORDER NUMBER: The results of analyses performed on the following samples submitted to the CON-TEST Analytical Laboratory are found in this report. PROJECT LOCATION: Dunn, NC FIELD SAMPLE # LAB ID: MATRIX TEST SUB LAB SAMPLE DESCRIPTION MW-30 19K0023-01 Ground Water SW-846 8260D SW-846 8270E



EXECUTIVE SUMMARY

Client ID: MW-30		Lab ID:	19K0023-01			
Analyte	Results/Qua	1	DL	RL	Units	Method
1,2,4-Trimethylbenzene	65		3.6	20	μg/L	SW-846 8260D
1,3,5-Trimethylbenzene	13	J	2.8	20	μg/L	SW-846 8260D
Benzene	1200		3.6	20	μg/L	SW-846 8260D
Diisopropyl Ether (DIPE)	6.4	J	3.4	10	μg/L	SW-846 8260D
Ethylbenzene	190		2.6	20	μg/L	SW-846 8260D
Isopropylbenzene (Cumene)	10	J	3.4	20	μg/L	SW-846 8260D
m+p Xylene	84		6.0	40	μg/L	SW-846 8260D
Methyl tert-Butyl Ether (MTBE)	15	J	5.0	20	μg/L	SW-846 8260D
Naphthalene	43		6.2	40	μg/L	SW-846 8260D
n-Propylbenzene	22		2.6	20	μg/L	SW-846 8260D
o-Xylene	41		3.4	20	μg/L	SW-846 8260D
Toluene	110		2.8	20	μg/L	SW-846 8260D
2-Methylnaphthalene (SIM)	15		0.62	10	μg/L	SW-846 8270E
Naphthalene (SIM)	50		2.6	10	$\mu g/L$	SW-846 8270E

Con-Test does not accept liability for the consequences of any actions taken solely on the basis of the information provided in the Executive Summary section of this report. Users must review this report in its entirety to determine data usability and assessment.



CASE NARRATIVE SUMMARY

All reported results are within defined laboratory quality control objectives unless listed below or otherwise qualified in this report.

REVISED REPORT 11-20-19: Due to a labeling error the results for method 8270 have been revised with the correct results.

REVISED REPORT 11-19-19: Due to a labeling error the results for method 8260 have been revised with the correct results.

For method 8270, only PAHs were requested and reported. For method 8260D elevated reporting limit for sample 19K0023-01 due to high concentrations of target compounds.

SW-846 8260D

Oualifications:

RL-11

Elevated reporting limit due to high concentration of target compounds.

Analyte & Samples(s) Qualified:

19K0023-01[MW-30]

V-20

Continuing calibration verification (CCV) did not meet method specifications and was biased on the high side. Data validation is not affected since sample result was "not detected" for this compound. Analyte & Samples(s) Qualified:

Bromomethane B245122-BS1, B245122-BSD1, S042311-CCV1

Chloromethane

B245122-BS1, B245122-BSD1, S042311-CCV1

The results of analyses reported only relate to samples submitted to the Con-Test Analytical Laboratory for testing.

I certify that the analyses listed above, unless specifically listed as subcontracted, if any, were performed under my direction according to the approved methodologies listed in this document, and that based upon my inquiry of those individuals immediately responsible for obtaining the information, the material contained in this report is, to the best of my knowledge and belief, accurate and complete.

Asppml

Tod E. Kopyscinski Laboratory Director



Volatile Organic Compounds by GC/MS

Sample Description:

Sampled: 10/30/2019 16:30

Project Location: Dunn, NC

Date Received: 10/31/2019

Field Sample #: MW-30

Sample ID: 19K0023-01 Sample Matrix: Ground Water

Sample Flags: RL-11

Analyte	Results	RL	DL	Units	Dilution	Flag/Qual	Method	Date Prepared	Date/Time Analyzed	Analyst
Acetone	ND	1000	76	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Acrylonitrile	ND	100	10	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
tert-Amyl Methyl Ether (TAME)	ND	10	2.8	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Benzene	1200	20	3.6	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Bromobenzene	ND	20	3.0	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Bromochloromethane	ND	20	6.4	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Bromodichloromethane	ND	10	3.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Bromoform	ND	20	9.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Bromomethane	ND	40	16	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
2-Butanone (MEK)	ND	400	39	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
tert-Butyl Alcohol (TBA)	ND	400	83	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
n-Butylbenzene	ND	20	4.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
sec-Butylbenzene	ND	20	3.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
tert-Butylbenzene	ND	20	3.4	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
tert-Butyl Ethyl Ether (TBEE)	ND	10	3.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Carbon Disulfide	ND	100	89	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Carbon Tetrachloride	ND	20	2.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Chlorobenzene	ND	20	3.0	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Chlorodibromomethane	ND	10	4.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Chloroethane	ND	40	7.0	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Chloroform	ND	40	3.4	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Chloromethane	ND	40	9.0	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
2-Chlorotoluene	ND	20	2.4	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
4-Chlorotoluene	ND	20	2.8	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,2-Dibromo-3-chloropropane (DBCP)	ND	100	11	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,2-Dibromoethane (EDB)	ND	10	3.8	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Dibromomethane	ND	20	7.4	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,2-Dichlorobenzene	ND	20	3.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,3-Dichlorobenzene	ND	20	2.4	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,4-Dichlorobenzene	ND	20	2.6	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
trans-1,4-Dichloro-2-butene	ND	40	6.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Dichlorodifluoromethane (Freon 12)	ND	40	5.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,1-Dichloroethane	ND	20	3.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,2-Dichloroethane	ND	20	8.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,1-Dichloroethylene	ND	20	6.4	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
cis-1,2-Dichloroethylene	ND	20	2.6	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
trans-1,2-Dichloroethylene	ND	20	6.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,2-Dichloropropane	ND	20	4.0	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,3-Dichloropropane	ND	10	2.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
2,2-Dichloropropane	ND	20	4.0	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,1-Dichloropropene	ND	40	3.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
cis-1,3-Dichloropropene	ND	10	2.6	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
trans-1,3-Dichloropropene	ND	10	4.6	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Diethyl Ether	ND	40	6.8	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH

Work Order: 19K0023

Page 6 of 23



Volatile Organic Compounds by GC/MS

Sample Description:

Sampled: 10/30/2019 16:30

Project Location: Dunn, NC

Date Received: 10/31/2019 Field Sample #: MW-30

Sample ID: 19K0023-01

Sample Matrix: Ground Water

Sample Flags: RL-11

Analyte	Results	RL	DL	Units	Dilution	Flag/Qual	Method	Date Prepared	Date/Time Analyzed	Analyst
Diisopropyl Ether (DIPE)	6.4	10	3.4	μg/L	20	J	SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,4-Dioxane	ND	1000	450	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Ethylbenzene	190	20	2.6	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Hexachlorobutadiene	ND	12	9.4	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
2-Hexanone (MBK)	ND	200	30	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Isopropylbenzene (Cumene)	10	20	3.4	μg/L	20	J	SW-846 8260D	11/5/19	11/6/19 12:05	EEH
p-Isopropyltoluene (p-Cymene)	ND	20	4.0	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Methyl tert-Butyl Ether (MTBE)	15	20	5.0	μg/L	20	J	SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Methylene Chloride	ND	100	6.8	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
4-Methyl-2-pentanone (MIBK)	ND	200	33	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Naphthalene	43	40	6.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
n-Propylbenzene	22	20	2.6	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Styrene	ND	20	2.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,1,1,2-Tetrachloroethane	ND	20	5.4	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,1,2,2-Tetrachloroethane	ND	10	4.4	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Tetrachloroethylene	ND	20	3.6	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Tetrahydrofuran	ND	200	10	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Toluene	110	20	2.8	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,2,3-Trichlorobenzene	ND	100	11	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,2,4-Trichlorobenzene	ND	20	8.0	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,3,5-Trichlorobenzene	ND	20	6.0	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,1,1-Trichloroethane	ND	20	4.0	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,1,2-Trichloroethane	ND	20	3.2	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Trichloroethylene	ND	20	4.8	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Trichlorofluoromethane (Freon 11)	ND	40	6.6	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,2,3-Trichloropropane	ND	40	5.0	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,1,2-Trichloro-1,2,2-trifluoroethane (Freon 113)	ND	20	6.4	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,2,4-Trimethylbenzene	65	20	3.6	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
1,3,5-Trimethylbenzene	13	20	2.8	μg/L	20	J	SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Vinyl Chloride	ND	40	9.0	$\mu g/L$	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
m+p Xylene	84	40	6.0	$\mu g/L$	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
o-Xylene	41	20	3.4	μg/L	20		SW-846 8260D	11/5/19	11/6/19 12:05	EEH
Surrogates		% Reco	very	Recovery Limits	•	Flag/Qual				
1,2-Dichloroethane-d4		94.5		70-130					11/6/19 12:05	
Toluene-d8		102		70-130					11/6/19 12:05	
4-Bromofluorobenzene		96.5		70-130					11/6/19 12:05	

Work Order: 19K0023



Project Location: Dunn, NC Date Received: 10/31/2019

Field Sample #: MW-30

Sample ID: 19K0023-01

Sample Matrix: Ground Water

Sampled: 10/30/2019 16:30

Sample Description:

Work Order: 19K0023

Date/Time

Analyzed

11/6/19 19:15

11/6/19 19:15

11/6/19 19:15

11/6/19 19:15

11/6/19 19:15

11/6/19 19:15

11/6/19 19:15

11/6/19 19:15

11/6/19 19:15

Analyst

CLA

CLA

CLA

CLA

CLA

CLA

CLA

CLA

CLA

Semivolatile Organic Compounds by GC/MS Date Analyte Results RL DL Units Dilution Flag/Qual Method Prepared Acenaphthene (SIM) ND 0.30 0.033 μg/L 1 SW-846 8270E 11/5/19 Acenaphthylene (SIM) ND 0.20 0.035 μg/L 1 SW-846 8270E 11/5/19 Anthracene (SIM) ND 0.20 0.032 SW-846 8270E 11/5/19 $\mu g/L$ 1 $\mu g/L$ Benzo(a)anthracene (SIM) ND 0.050 0.016 1 SW-846 8270E 11/5/19 Benzo(a)pyrene (SIM) ND 0.10 0.012 SW-846 8270E 11/5/19 1 $\mu g/L$ Benzo(b)fluoranthene (SIM) ND 0.015 11/5/19 0.050 SW-846 8270E $\mu g/L$ 1 Benzo(g,h,i)perylene (SIM) ND 0.50 0.018 11/5/19 $\mu g/L$ 1 SW-846 8270E Benzo(k)fluoranthene (SIM) ND 0.012 SW-846 8270E 11/5/19 0.20 μg/L 1 Chrysene (SIM) ND 0.20 0.015 μg/L 1 SW-846 8270E 11/5/19

Dibenz(a,h)anthracene (SIM)	ND	0.10	0.017	μg/L	1		SW-846 8270E	11/5/19	11/6/19 19:15	CLA
Fluoranthene (SIM)	ND	0.50	0.025	μg/L	1		SW-846 8270E	11/5/19	11/6/19 19:15	CLA
Fluorene (SIM)	ND	1.0	0.034	μg/L	1		SW-846 8270E	11/5/19	11/6/19 19:15	CLA
Indeno(1,2,3-cd)pyrene (SIM)	ND	0.10	0.018	μg/L	1		SW-846 8270E	11/5/19	11/6/19 19:15	CLA
2-Methylnaphthalene (SIM)	15	10	0.62	μg/L	10		SW-846 8270E	11/5/19	11/7/19 8:30	CLA
Naphthalene (SIM)	50	10	2.6	µg/L	10		SW-846 8270E	11/5/19	11/7/19 8:30	CLA
Phenanthrene (SIM)	ND	0.050	0.030	µg/L	1		SW-846 8270E	11/5/19	11/6/19 19:15	CLA
Pyrene (SIM)	ND	1.0	0.023	μg/L	1		SW-846 8270E	11/5/19	11/6/19 19:15	CLA
Surrogates		% Reco	very	Recovery Limits		Flag/Qual				
Nitrobenzene-d5		68.3		30-130					11/6/19 19:15	
				50-150					11/0/17 17.15	
Nitrobenzene-d5		77.3		30-130					11/7/19 8:30	
Nitrobenzene-d5 2-Fluorobiphenyl										
		77.3		30-130					11/7/19 8:30	
2-Fluorobiphenyl		77.3 48.3		30-130 30-130					11/7/19 8:30 11/6/19 19:15	
2-Fluorobiphenyl 2-Fluorobiphenyl		77.3 48.3 59.7		30-130 30-130 30-130					11/7/19 8:30 11/6/19 19:15 11/7/19 8:30	



Sample Extraction Data

Prep Method: SW-846 5030B-SW-846 8260D

Lab Number [Field ID]	Batch	Initial [mL]	Final [mL]	Date	
19K0023-01 [MW-30]	B245122	0.25	5.00	11/05/19	
Prep Method: SW-846 3510C-SW-846 8270E					
Prep Method: SW-846 3510C-SW-846 8270E Lab Number [Field ID]	Batch	Initial [mL]	Final [mL]	Date	



QUALITY CONTROL

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
-	Result	Limit	UIIIIS	Level	result	70KEU	Limits	κrD	LIIIII	notes
Batch B245122 - SW-846 5030B				-	10.5.1					
Blank (B245122-BLK1)			-	Prepared: 11	/05/19 Anal	yzed: 11/06/1	9			
Acetone	ND	50 5 0	μg/L α/T							
Acrylonitrile	ND	5.0	μg/L							
ert-Amyl Methyl Ether (TAME)	ND	0.50	μg/L							
Benzene	ND	1.0	μg/L							
Bromobenzene	ND	1.0	μg/L							
Bromochloromethane	ND	1.0	μg/L							
romodichloromethane	ND	0.50	μg/L							
romoform	ND	1.0	μg/L							
romomethane	ND	2.0	μg/L							
Butanone (MEK)	ND	20	μg/L							
rt-Butyl Alcohol (TBA)	ND	20	μg/L							
Butylbenzene	ND	1.0	μg/L							
ec-Butylbenzene	ND	1.0	μg/L							
rt-Butylbenzene	ND	1.0	μg/L							
rt-Butyl Ethyl Ether (TBEE)	ND	0.50	μg/L							
arbon Disulfide	ND	5.0	μg/L							
arbon Tetrachloride	ND	1.0	μg/L							
hlorobenzene	ND	1.0	$\mu g/L$							
hlorodibromomethane	ND	0.50	μg/L							
hloroethane	ND	2.0	μg/L							
hloroform	ND	2.0	μg/L							
hloromethane	ND	2.0	μg/L							
Chlorotoluene	ND	1.0	μg/L							
Chlorotoluene	ND	1.0	μg/L							
2-Dibromo-3-chloropropane (DBCP)	ND	5.0	μg/L							
2-Dibromoethane (EDB)	ND	0.50	μg/L							
ibromomethane	ND	1.0	μg/L							
2-Dichlorobenzene	ND	1.0	μg/L							
3-Dichlorobenzene	ND	1.0	μg/L							
4-Dichlorobenzene	ND	1.0	μg/L							
ans-1,4-Dichloro-2-butene	ND	2.0	μg/L							
ichlorodifluoromethane (Freon 12)	ND	2.0	μg/L							
1-Dichloroethane	ND	1.0	μg/L							
2-Dichloroethane	ND	1.0	μg/L							
1-Dichloroethylene	ND	1.0	μg/L							
s-1,2-Dichloroethylene	ND	1.0	μg/L							
ans-1,2-Dichloroethylene	ND	1.0	μg/L							
2-Dichloropropane	ND	1.0	μg/L							
3-Dichloropropane	ND	0.50	μg/L							
2-Dichloropropane	ND	1.0	μg/L							
1-Dichloropropene	ND	2.0	μg/L							
s-1,3-Dichloropropene	ND	0.50	μg/L							
ans-1,3-Dichloropropene	ND ND	0.50	μg/L							
iethyl Ether	ND ND	2.0	μg/L							
iisopropyl Ether (DIPE)	ND ND	0.50	μg/L							
4-Dioxane		50	μg/L μg/L							
hylbenzene	ND	1.0	μg/L μg/L							
exachlorobutadiene	ND									
Hexanone (MBK)	ND	0.60	μg/L μg/I							
	ND	10	μg/L ug/I							
opropylbenzene (Cumene)	ND	1.0	μg/L							
Isopropyltoluene (p-Cymene) lethyl tert-Butyl Ether (MTBE)	ND ND	1.0 1.0	μg/L μg/L							



QUALITY CONTROL

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
atch B245122 - SW-846 5030B										
Blank (B245122-BLK1)				Prepared: 11	/05/19 Analy	zed: 11/06/1	9			
1ethylene Chloride	ND	5.0	μg/L							
-Methyl-2-pentanone (MIBK)	ND	10	μg/L							
aphthalene	ND	2.0	μg/L							
Propylbenzene	ND	1.0	μg/L							
yrene	ND	1.0	μg/L							
1,1,2-Tetrachloroethane	ND	1.0	μg/L							
1,2,2-Tetrachloroethane	ND	0.50	μg/L							
etrachloroethylene	ND	1.0	μg/L							
etrahydrofuran	ND	10	μg/L							
bluene	ND	1.0	μg/L							
2,3-Trichlorobenzene	ND	5.0	μg/L							
2,4-Trichlorobenzene	ND	1.0	μg/L							
3,5-Trichlorobenzene	ND	1.0	μg/L							
1,1-Trichloroethane	ND	1.0	μg/L							
1,2-Trichloroethane	ND	1.0	μg/L							
richloroethylene	ND	1.0	μg/L							
ichlorofluoromethane (Freon 11)	ND	2.0	μg/L							
2,3-Trichloropropane	ND	2.0	μg/L							
1,2-Trichloro-1,2,2-trifluoroethane (Freon	ND	1.0	μg/L							
3)	ND		10							
2,4-Trimethylbenzene	ND	1.0	μg/L							
3,5-Trimethylbenzene	ND	1.0	μg/L							
inyl Chloride	ND	2.0	μg/L							
+p Xylene	ND	2.0	μg/L							
Xylene	ND	1.0	μg/L							
rrogate: 1,2-Dichloroethane-d4	23.6		μg/L	25.0		94.4	70-130			
irrogate: Toluene-d8	24.4		μg/L	25.0		97.4	70-130			
irrogate: 4-Bromofluorobenzene	24.4		μg/L	25.0		97.4	70-130			
CS (B245122-BS1)				Prepared: 11	/05/19 Analy	zed: 11/06/1	9			
cetone	88.7	50	μg/L	100		88.7	70-160			
crylonitrile	8.30	5.0	μg/L	10.0		83.0	70-130			
rt-Amyl Methyl Ether (TAME)	9.48	0.50	μg/L	10.0		94.8	70-130			
enzene	10.7	1.0	μg/L	10.0		107	70-130			
romobenzene	10.4	1.0	μg/L	10.0		104	70-130			
romochloromethane	10.4	1.0	μg/L	10.0		104	70-130			
romodichloromethane	10.5	0.50	μg/L	10.0		105	70-130			
romoform	9.77	1.0	μg/L	10.0		97.7	70-130			
romomethane	9.88	2.0	μg/L	10.0		98.8	40-160			V-20
Butanone (MEK)	87.5	20	μg/L	100		87.5	40-160			
rt-Butyl Alcohol (TBA)	80.3	20	μg/L	100		80.3	40-160			
Butylbenzene	9.81	1.0	μg/L	10.0		98.1	70-130			
c-Butylbenzene	11.1	1.0	μg/L	10.0		111	70-130			
t-Butylbenzene	10.9	1.0	μg/L	10.0		109	70-130			
rt-Butyl Ethyl Ether (TBEE)	9.24	0.50	μg/L	10.0		92.4	70-130			
arbon Disulfide	9.24	5.0	μg/L	10.0		118	70-130			
arbon Tetrachloride	10.3	1.0	μg/L	10.0		103	70-130			
hlorobenzene	10.3	1.0	μg/L	10.0		114	70-130			
hlorodibromomethane	11.4	0.50	μg/L μg/L	10.0		100	70-130			
hloroethane		2.0	μg/L μg/L	10.0		116	70-130			
hloroform	11.6	2.0								
hloromethane	10.4		μg/L ug/I	10.0		104	70-130			V 20
	9.02	2.0 1.0	μg/L μg/L	10.0 10.0		90.2	40-160 70-130			V-20
Chlorotoluene	10.6					106				



QUALITY CONTROL

		Reporting		Spike	Source		%REC		RPD	
Analyte	Result	Limit	Units	Level	Result	%REC	Limits	RPD	Limit	Notes
atch B245122 - SW-846 5030B										
.CS (B245122-BS1)				Prepared: 11	/05/19 Analy	yzed: 11/06/1	9			
-Chlorotoluene	10.5	1.0	μg/L	10.0		105	70-130			
,2-Dibromo-3-chloropropane (DBCP)	9.08	5.0	μg/L	10.0		90.8	70-130			
,2-Dibromoethane (EDB)	10.8	0.50	μg/L	10.0		108	70-130			
Dibromomethane	10.4	1.0	μg/L	10.0		104	70-130			
,2-Dichlorobenzene	11.0	1.0	μg/L	10.0		110	70-130			
,3-Dichlorobenzene	11.5	1.0	μg/L	10.0		115	70-130			
,4-Dichlorobenzene	11.2	1.0	μg/L	10.0		112	70-130			
ans-1,4-Dichloro-2-butene	7.67	2.0	μg/L	10.0		76.7	70-130			
Dichlorodifluoromethane (Freon 12)	8.34	2.0	μg/L	10.0		83.4	40-160			
1-Dichloroethane	10.7	1.0	μg/L	10.0		107	70-130			
2-Dichloroethane	9.98	1.0	μg/L	10.0		99.8	70-130			
1-Dichloroethylene	11.0	1.0	μg/L	10.0		110	70-130			
is-1,2-Dichloroethylene	10.6	1.0	μg/L	10.0		106	70-130			
ans-1,2-Dichloroethylene	10.5	1.0	μg/L	10.0		105	70-130			
2-Dichloropropane	10.8	1.0	μg/L	10.0		108	70-130			
3-Dichloropropane	10.3	0.50	μg/L	10.0		103	70-130			
2-Dichloropropane	8.49	1.0	μg/L	10.0		84.9	40-130			
1-Dichloropropene	10.5	2.0	μg/L	10.0		105	70-130			
s-1,3-Dichloropropene	10.0	0.50	μg/L	10.0		100	70-130			
ans-1,3-Dichloropropene	9.41	0.50	μg/L	10.0		94.1	70-130			
iethyl Ether	10.8	2.0	μg/L	10.0		108	70-130			
iisopropyl Ether (DIPE)	10.1	0.50	μg/L	10.0		101	70-130			
4-Dioxane	86.6	50	μg/L	100		86.6	40-130			
hylbenzene	11.0	1.0	μg/L	10.0		110	70-130			
exachlorobutadiene	9.83	0.60	μg/L	10.0		98.3	70-130			
Hexanone (MBK)	84.3	10	μg/L	100		84.3	70-160			
opropylbenzene (Cumene)	11.1	1.0	μg/L	10.0		111	70-130			
Isopropyltoluene (p-Cymene)	10.7	1.0	μg/L	10.0		107	70-130			
(ethyl tert-Butyl Ether (MTBE)	10.7	1.0	μg/L	10.0		103	70-130			
lethylene Chloride	11.0	5.0	μg/L	10.0		110	70-130			
Methyl-2-pentanone (MIBK)	86.6	10	μg/L	100		86.6	70-160			
aphthalene	7.64	2.0	μg/L	10.0		76.4	40-130			
Propylbenzene	10.6	1.0	μg/L	10.0		106	70-130			
yrene	10.8	1.0	μg/L	10.0		100	70-130			
1,1,2-Tetrachloroethane		1.0	μg/L	10.0		113	70-130			
1,2,2-Tetrachloroethane	11.3	0.50	μg/L	10.0		108	70-130			
etrachloroethylene	10.8	1.0	μg/L μg/L	10.0		115	70-130			
etrahydrofuran	11.5	10	μg/L	10.0		96.0	70-130			J
bluene	9.60	1.0	μg/L μg/L	10.0		109	70-130			J
2,3-Trichlorobenzene	10.9									
2,3-Trichlorobenzene	8.06	5.0	μg/L μg/I	10.0		80.6 87.0	70-130			
2,4-Trichlorobenzene	8.70	1.0	μg/L ug/I	10.0		87.0	70-130			
	9.18	1.0	μg/L uα/I	10.0		91.8	70-130			
1,1-Trichloroethane	10.4	1.0	μg/L ug/I	10.0		104	70-130			
1,2-Trichloroethane	11.0	1.0	μg/L ug/I	10.0		110	70-130			
ichlere freuene (Freuer 11)	11.1	1.0	μg/L	10.0		111	70-130			
richlorofluoromethane (Freon 11)	9.61	2.0	μg/L	10.0		96.1	70-130			
2,3-Trichloropropane	10.3	2.0	μg/L	10.0		103	70-130			
1,2-Trichloro-1,2,2-trifluoroethane (Freon 3)	11.5	1.0	μg/L	10.0		115	70-130			
2,4-Trimethylbenzene	10.8	1.0	μg/L	10.0		108	70-130			
3,5-Trimethylbenzene	10.4	1.0	μg/L	10.0		104	70-130			
/inyl Chloride	9.58	2.0	μg/L	10.0		95.8	40-160			



QUALITY CONTROL

Volatile Organic Compounds by GC/MS - Quality Control

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes	
Batch B245122 - SW-846 5030B											
LCS (B245122-BS1)				Prepared: 1	1/05/19 Anal	yzed: 11/06/1	9				
m+p Xylene	21.3	2.0	μg/L	20.0		106	70-130				
o-Xylene	11.1	1.0	μg/L	10.0		111	70-130				
Surrogate: 1,2-Dichloroethane-d4	23.4		μg/L	25.0		93.6	70-130				
Surrogate: Toluene-d8	25.0		μg/L	25.0		99.9	70-130				
Surrogate: 4-Bromofluorobenzene	24.6		$\mu g/L$	25.0		98.4	70-130				
LCS Dup (B245122-BSD1)				Prepared: 1	1/05/19 Anal	yzed: 11/06/1	9				
Acetone	91.2	50	μg/L	100		91.2	70-160	2.72	25		i
Acrylonitrile	9.01	5.0	μg/L	10.0		90.1	70-130	8.20	25		
tert-Amyl Methyl Ether (TAME)	9.41	0.50	μg/L	10.0		94.1	70-130	0.741	25		
Benzene	10.4	1.0	μg/L	10.0		104	70-130	3.23	25		
Bromobenzene	10.0	1.0	μg/L	10.0		100	70-130	4.00	25		
Bromochloromethane	10.4	1.0	μg/L	10.0		104	70-130	0.865	25		
Bromodichloromethane	10.2	0.50	μg/L	10.0		102	70-130	3.68	25		
Bromoform	10.2	1.0	μg/L	10.0		102	70-130	3.91	25		
Bromomethane	9.76	2.0	μg/L	10.0		97.6	40-160	1.22	25	V-20	Ť
2-Butanone (MEK)	89.8	20	μg/L	100		89.8	40-160	2.63	25		Ť
tert-Butyl Alcohol (TBA)	83.6	20	μg/L	100		83.6	40-160	4.00	25		Ť
n-Butylbenzene	9.65	1.0	μg/L	10.0		96.5	70-130	1.64	25		
sec-Butylbenzene	11.0	1.0	μg/L	10.0		110	70-130	1.18	25		
tert-Butylbenzene	10.8	1.0	μg/L	10.0		108	70-130	1.11	25		
tert-Butyl Ethyl Ether (TBEE)	9.17	0.50	μg/L	10.0		91.7	70-130	0.760	25		
Carbon Disulfide	10.8	5.0	μg/L	10.0		108	70-130	8.59	25		
Carbon Tetrachloride	10.2	1.0	μg/L	10.0		102	70-130	1.46	25		
Chlorobenzene	11.5	1.0	μg/L	10.0		115	70-130	0.610	25		
Chlorodibromomethane	9.73	0.50	μg/L	10.0		97.3	70-130	2.84	25		
Chloroethane	10.8	2.0	μg/L	10.0		108	70-130	7.24	25		
Chloroform	10.1	2.0	μg/L	10.0		101	70-130	2.53	25		
Chloromethane	8.77	2.0	μg/L	10.0		87.7	40-160	2.81	25	V-20	Ť
2-Chlorotoluene	10.7	1.0	μg/L	10.0		107	70-130	0.845	25	. 20	
4-Chlorotoluene	10.7	1.0	μg/L	10.0		107	70-130	1.34	25		
1,2-Dibromo-3-chloropropane (DBCP)	8.90	5.0	μg/L	10.0		89.0	70-130	2.00	25		
1,2-Dibromoethane (EDB)	10.7	0.50	μg/L	10.0		107	70-130	1.58	25		
Dibromomethane	10.7	1.0	μg/L	10.0		107	70-130	2.33	25		
1,2-Dichlorobenzene	11.0	1.0	μg/L	10.0		110	70-130	0.181	25		
1,3-Dichlorobenzene	11.0	1.0	μg/L	10.0		114	70-130	0.872	25		
1,4-Dichlorobenzene	10.9	1.0	μg/L	10.0		109	70-130	3.07	25		
trans-1,4-Dichloro-2-butene	8.71	2.0	μg/L	10.0		87.1	70-130	12.7	25		
Dichlorodifluoromethane (Freon 12)	8.23	2.0	μg/L	10.0		82.3	40-160	1.33	25		Ť
1,1-Dichloroethane	8.23	1.0	μg/L μg/L	10.0		102	70-130	4.40	25		1
1,2-Dichloroethane	9.91	1.0	μg/L μg/L	10.0		99.1	70-130	0.704	25		
1,1-Dichloroethylene	10.6	1.0	μg/L μg/L	10.0		106	70-130	3.90	25		
cis-1,2-Dichloroethylene		1.0	μg/L	10.0		100	70-130	5.01	25		
trans-1,2-Dichloroethylene	10.1	1.0	μg/L μg/L	10.0		101	70-130	2.50	23 25		
1,2-Dichloropropane	10.3 10.8	1.0	μg/L μg/L	10.0		103	70-130	0.649	23 25		
1,3-Dichloropropane		0.50	μg/L μg/L	10.0		108	70-130	0.870	23 25		
2,2-Dichloropropane	10.4	1.0	μg/L μg/L	10.0		81.5	40-130	4.09			Ť
1,1-Dichloropropene	8.15	2.0		10.0					25 25		I
cis-1,3-Dichloropropene	10.4	2.0 0.50	μg/L μg/L	10.0		104 97.3	70-130	1.06	25 25		
trans-1,3-Dichloropropene	9.73	0.50	μg/L μg/L				70-130	3.14			
Diethyl Ether	9.66			10.0		96.6	70-130	2.62	25		
-	10.3	2.0	μg/L μg/I	10.0		103	70-130	4.65	25 25		
Diisopropyl Ether (DIPE)	9.94	0.50	μg/L	10.0		99.4	70-130	1.99	25		

Page 13 of 23



QUALITY CONTROL

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes	
Batch B245122 - SW-846 5030B											
LCS Dup (B245122-BSD1)				Prepared: 11	/05/19 Anal	yzed: 11/06/1	.9				
1,4-Dioxane	92.6	50	μg/L	100		92.6	40-130	6.72	50		Ť
Ethylbenzene	10.7	1.0	μg/L	10.0		107	70-130	2.12	25		
Hexachlorobutadiene	10.1	0.60	μg/L	10.0		101	70-130	2.41	25		
2-Hexanone (MBK)	84.4	10	μg/L	100		84.4	70-160	0.0712	25		Ť
Isopropylbenzene (Cumene)	10.6	1.0	μg/L	10.0		106	70-130	3.96	25		
p-Isopropyltoluene (p-Cymene)	10.5	1.0	μg/L	10.0		105	70-130	2.36	25		
Methyl tert-Butyl Ether (MTBE)	10.2	1.0	μg/L	10.0		102	70-130	0.585	25		
Methylene Chloride	10.6	5.0	μg/L	10.0		106	70-130	3.60	25		
4-Methyl-2-pentanone (MIBK)	90.1	10	μg/L	100		90.1	70-160	4.02	25		Ť
Naphthalene	8.02	2.0	μg/L	10.0		80.2	40-130	4.85	25		Ť
n-Propylbenzene	10.3	1.0	μg/L	10.0		103	70-130	2.11	25		
Styrene	10.4	1.0	μg/L	10.0		104	70-130	4.90	25		
1,1,1,2-Tetrachloroethane	11.3	1.0	μg/L	10.0		113	70-130	0.265	25		
1,1,2,2-Tetrachloroethane	11.1	0.50	μg/L	10.0		111	70-130	3.01	25		
Tetrachloroethylene	11.5	1.0	μg/L	10.0		115	70-130	0.348	25		
Tetrahydrofuran	10.0	10	μg/L	10.0		100	70-130	4.28	25		
Toluene	10.5	1.0	μg/L	10.0		105	70-130	3.82	25		
1,2,3-Trichlorobenzene	7.86	5.0	μg/L	10.0		78.6	70-130	2.51	25		
1,2,4-Trichlorobenzene	8.34	1.0	μg/L	10.0		83.4	70-130	4.23	25		
1,3,5-Trichlorobenzene	8.42	1.0	μg/L	10.0		84.2	70-130	8.64	25		
1,1,1-Trichloroethane	9.84	1.0	μg/L	10.0		98.4	70-130	5.24	25		
1,1,2-Trichloroethane	11.0	1.0	μg/L	10.0		110	70-130	0.364	25		
Trichloroethylene	11.1	1.0	μg/L	10.0		111	70-130	0.180	25		
Trichlorofluoromethane (Freon 11)	9.30	2.0	μg/L	10.0		93.0	70-130	3.28	25		
1,2,3-Trichloropropane	10.0	2.0	μg/L	10.0		100	70-130	2.85	25		
1,1,2-Trichloro-1,2,2-trifluoroethane (Freon 113)	11.1	1.0	μg/L	10.0		111	70-130	4.07	25		
1,2,4-Trimethylbenzene	10.7	1.0	μg/L	10.0		107	70-130	0.650	25		
1,3,5-Trimethylbenzene	9.97	1.0	μg/L	10.0		99.7	70-130	3.93	25		
Vinyl Chloride	9.25	2.0	μg/L	10.0		92.5	40-160	3.51	25		İ
m+p Xylene	21.3	2.0	μg/L	20.0		106	70-130	0.0470	25		
p-Xylene	11.1	1.0	μg/L	10.0		111	70-130	0.541	25		
Surrogate: 1,2-Dichloroethane-d4	22.9		μg/L	25.0		91.5	70-130				_
Surrogate: Toluene-d8	25.2		μg/L	25.0		101	70-130				
Surrogate: 4-Bromofluorobenzene	24.6		μg/L	25.0		98.5	70-130				



QUALITY CONTROL

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch B245268 - SW-846 3510C										
Blank (B245268-BLK1)				Prepared &	Analyzed: 11	/06/19				
Acenaphthene (SIM)	ND	0.30	μg/L							
Acenaphthylene (SIM)	ND	0.20	μg/L							
Anthracene (SIM)	ND	0.20	μg/L							
Benzo(a)anthracene (SIM)	ND	0.050	μg/L							
Benzo(a)pyrene (SIM)	ND	0.10	μg/L							
Benzo(b)fluoranthene (SIM)	ND	0.050	μg/L							
Benzo(g,h,i)perylene (SIM)	ND	0.50	μg/L							
Benzo(k)fluoranthene (SIM)	ND	0.20	μg/L							
Chrysene (SIM)	ND	0.20	μg/L							
Dibenz(a,h)anthracene (SIM)	ND	0.10	μg/L							
Eluoranthene (SIM)	ND	0.50	μg/L							
luorene (SIM)	ND	1.0	μg/L							
ndeno(1,2,3-cd)pyrene (SIM)	ND	0.10	μg/L							
-Methylnaphthalene (SIM)	ND	1.0	μg/L							
Japhthalene (SIM)	ND	1.0	μg/L							
henanthrene (SIM)	ND	0.050	μg/L							
yrene (SIM)	ND	1.0	μg/L							
Surrogate: Nitrobenzene-d5	73.7		μg/L	100		73.7	30-130			
urrogate: 2-Fluorobiphenyl	51.1		μg/L	100		51.1	30-130			
urrogate: p-Terphenyl-d14	65.3		μg/L	100		65.3	30-130			
LCS (B245268-BS1)				Prepared &	Analyzed: 11	/06/19				
Acenaphthene (SIM)	35.2	6.0	μg/L	50.0		70.4	40-140			
Acenaphthylene (SIM)	35.7	4.0	μg/L	50.0		71.4	40-140			
Anthracene (SIM)	38.2	4.0	μg/L	50.0		76.3	40-140			
Benzo(a)anthracene (SIM)	37.0	1.0	μg/L	50.0		74.1	40-140			
Benzo(a)pyrene (SIM)	37.4	2.0	μg/L	50.0		74.8	40-140			
Benzo(b)fluoranthene (SIM)	39.6	1.0	μg/L	50.0		79.2	40-140			
Benzo(g,h,i)perylene (SIM)	40.1	10	μg/L	50.0		80.2	40-140			
Benzo(k)fluoranthene (SIM)	39.8	4.0	μg/L	50.0		79.6	40-140			
Chrysene (SIM)	35.8	4.0	μg/L	50.0		71.7	40-140			
Dibenz(a,h)anthracene (SIM)	42.6	2.0	μg/L	50.0		85.2	40-140			
Iuoranthene (SIM)	37.3	10	μg/L	50.0		74.7	40-140			
Fluorene (SIM)	36.3	20	μg/L	50.0		72.6	40-140			
ndeno(1,2,3-cd)pyrene (SIM)	42.8	2.0	μg/L	50.0		85.6	40-140			
-Methylnaphthalene (SIM)	34.3	20	μg/L	50.0		68.7	40-140			
Naphthalene (SIM)	32.7	20	μg/L	50.0		65.4	40-140			
Phenanthrene (SIM)	35.9	1.0	μg/L	50.0		71.8	40-140			
yrene (SIM)	36.4	20	μg/L	50.0		72.7	40-140			
Surrogate: Nitrobenzene-d5	74.9		μg/L	100		74.9	30-130			
urrogate: 2-Fluorobiphenyl	56.8		μg/L	100		56.8	30-130			
Surrogate: p-Terphenyl-d14	59.6		μg/L	100		59.6	30-130			



‡

39 Spruce Street * East Longmeadow, MA 01028 * FAX 413/525-6405 * TEL. 413/525-2332

QUALITY CONTROL

Analyte	Result	Reporting Limit	Units	Spike Level	Source Result	%REC	%REC Limits	RPD	RPD Limit	Notes
Batch B245268 - SW-846 3510C										
LCS Dup (B245268-BSD1)				Prepared &	Analyzed: 11	/06/19				
Acenaphthene (SIM)	36.1	6.0	μg/L	50.0		72.2	40-140	2.47	20	
Acenaphthylene (SIM)	36.5	4.0	μg/L	50.0		73.0	40-140	2.22	20	
Anthracene (SIM)	39.5	4.0	μg/L	50.0		79.0	40-140	3.40	20	
Benzo(a)anthracene (SIM)	38.1	1.0	μg/L	50.0		76.2	40-140	2.82	20	
Benzo(a)pyrene (SIM)	38.7	2.0	μg/L	50.0		77.4	40-140	3.47	20	
Benzo(b)fluoranthene (SIM)	41.0	1.0	μg/L	50.0		82.0	40-140	3.43	20	
Benzo(g,h,i)perylene (SIM)	41.6	10	μg/L	50.0		83.3	40-140	3.82	20	
Benzo(k)fluoranthene (SIM)	41.8	4.0	μg/L	50.0		83.6	40-140	4.80	20	
Chrysene (SIM)	37.1	4.0	μg/L	50.0		74.1	40-140	3.35	20	
Dibenz(a,h)anthracene (SIM)	44.3	2.0	μg/L	50.0		88.5	40-140	3.78	20	
Fluoranthene (SIM)	38.4	10	μg/L	50.0		76.8	40-140	2.80	20	
Fluorene (SIM)	37.1	20	μg/L	50.0		74.2	40-140	2.23	20	
Indeno(1,2,3-cd)pyrene (SIM)	44.5	2.0	μg/L	50.0		88.9	40-140	3.76	20	
2-Methylnaphthalene (SIM)	35.8	20	μg/L	50.0		71.7	40-140	4.27	20	
Naphthalene (SIM)	33.0	20	μg/L	50.0		66.0	40-140	1.04	20	
Phenanthrene (SIM)	37.1	1.0	μg/L	50.0		74.2	40-140	3.18	20	
Pyrene (SIM)	37.4	20	μg/L	50.0		74.7	40-140	2.71	20	
Surrogate: Nitrobenzene-d5	77.8		μg/L	100		77.8	30-130			
Surrogate: 2-Fluorobiphenyl	59.4		μg/L	100		59.4	30-130			
Surrogate: p-Terphenyl-d14	60.7		μg/L	100		60.7	30-130			



FLAG/QUALIFIER SUMMARY

- * QC result is outside of established limits.
- † Wide recovery limits established for difficult compound.
- ‡ Wide RPD limits established for difficult compound.
- # Data exceeded client recommended or regulatory level

Percent recoveries and relative percent differences (RPDs) are determined by the software using values in the calculation which have not been rounded.

No results have been blank subtracted unless specified in the case narrative section.

- J Detected but below the Reporting Limit (lowest calibration standard); therefore, result is an estimated concentration (CLP J-Flag).
- RL-11 Elevated reporting limit due to high concentration of target compounds.
- V-20 Continuing calibration verification (CCV) did not meet method specifications and was biased on the high side. Data validation is not affected since sample result was "not detected" for this compound.



CERTIFICATIONS

Certified Analyses included in this Report

Analyte	Certifications	
SW-846 8260D in Water		
Acetone	NC	
Acrylonitrile	NC	
tert-Amyl Methyl Ether (TAME)	NC	
Benzene	NC	
Bromobenzene	NC	
Bromochloromethane	NC	
Bromodichloromethane	NC	
Bromoform	NC	
Bromomethane	NC	
2-Butanone (MEK)	NC	
tert-Butyl Alcohol (TBA)	NC	
n-Butylbenzene	NC	
sec-Butylbenzene	NC	
tert-Butylbenzene	NC	
tert-Butyl Ethyl Ether (TBEE)	NC	
Carbon Disulfide	NC	
Carbon Tetrachloride	NC	
Chlorobenzene	NC	
Chlorodibromomethane	NC	
Chloroethane	NC	
Chloroform	NC	
Chloromethane	NC	
2-Chlorotoluene	NC	
4-Chlorotoluene	NC	
1,2-Dibromo-3-chloropropane (DBCP)	NC	
1,2-Dibromoethane (EDB)	NC	
Dibromomethane	NC	
1,2-Dichlorobenzene	NC	
1,3-Dichlorobenzene	NC	
1,4-Dichlorobenzene	NC	
trans-1,4-Dichloro-2-butene	NC	
Dichlorodifluoromethane (Freon 12)	NC	
1,1-Dichloroethane	NC	
1,2-Dichloroethane	NC	
1,1-Dichloroethylene	NC	
cis-1,2-Dichloroethylene	NC	
trans-1,2-Dichloroethylene	NC	
1,2-Dichloropropane	NC	
1,3-Dichloropropane	NC	
2,2-Dichloropropane	NC	
1,1-Dichloropropene	NC	
cis-1,3-Dichloropropene	NC	
trans-1,3-Dichloropropene	NC	
Diethyl Ether	NC	
Diisopropyl Ether (DIPE)	NC	
1,4-Dioxane	NC	
Ethylbenzene	NC	



CERTIFICATIONS

Certified Analyses included in this Report

Certified Analyses included in this Report	
Analyte	Certifications
SW-846 8260D in Water	
Hexachlorobutadiene	NC
2-Hexanone (MBK)	NC
Isopropylbenzene (Cumene)	NC
p-Isopropyltoluene (p-Cymene)	NC
Methyl tert-Butyl Ether (MTBE)	NC
Methylene Chloride	NC
4-Methyl-2-pentanone (MIBK)	NC
Naphthalene	NC
n-Propylbenzene	NC
Styrene	NC
1,1,1,2-Tetrachloroethane	NC
1,1,2,2-Tetrachloroethane	NC
Tetrachloroethylene	NC
Tetrahydrofuran	NC
Toluene	NC
1,2,3-Trichlorobenzene	NC
1,2,4-Trichlorobenzene	NC
1,3,5-Trichlorobenzene	NC
1,1,1-Trichloroethane	NC
1,1,2-Trichloroethane	NC
Trichloroethylene	NC
Trichlorofluoromethane (Freon 11)	NC
1,2,3-Trichloropropane	NC
1,1,2-Trichloro-1,2,2-trifluoroethane (Freon 113)	NC
1,2,4-Trimethylbenzene	NC
1,3,5-Trimethylbenzene	NC
Vinyl Chloride	NC
m+p Xylene	NC
o-Xylene	NC



The CON-TEST Environmental Laboratory operates under the following certifications and accreditations:

Code	Description	Number	Expires
AIHA	AIHA-LAP, LLC - ISO17025:2017	100033	03/1/2020
MA	Massachusetts DEP	M-MA100	06/30/2020
СТ	Connecticut Department of Publilc Health	PH-0567	09/30/2021
NY	New York State Department of Health	10899 NELAP	04/1/2020
NH-S	New Hampshire Environmental Lab	2516 NELAP	02/5/2020
RI	Rhode Island Department of Health	LAO00112	12/30/2019
NC	North Carolina Div. of Water Quality	652	12/31/2019
NJ	New Jersey DEP	MA007 NELAP	06/30/2020
FL	Florida Department of Health	E871027 NELAP	06/30/2020
VT	Vermont Department of Health Lead Laboratory	LL015036	07/30/2020
ME	State of Maine	2011028	06/9/2021
VA	Commonwealth of Virginia	460217	12/14/2019
NH-P	New Hampshire Environmental Lab	2557 NELAP	09/6/2020
VT-DW	Vermont Department of Health Drinking Water	VT-255716	06/12/2020
NC-DW	North Carolina Department of Health	25703	07/31/2020
PA	Commonwealth of Pennsylvania DEP	68-05812	06/30/2020

				Т	1	1000	Nah	y sedar		-			1.1.1.1	1		N. 199		· · · · ·	-1. T		1 X.								1				100000	Quit	i i suat		Т	ab	le of	Con	tents
••	Page of		# of Containers	² Preservation Code	³ Container Code	Calduras strated the samples	Field Filtered	Lab to Filter		Orthophosphate Samples	Field Filtered	Lab to Filter		1 Matrix Codos:	GW = Ground Water	WW = Waste Water	uw = utitikitig water A = Air	S = Soil SL = Sludae	SOL = Solid	0 = Other (please	loution	² Preservation Codes:	l = lced	M = Methanol	N = Nitric Acid	s = surrur oc Acro B = Sodium Bisulfate	X = Sodium Hydroxide T = Sodium	Thiosulfate	O = Other (please define)	³ Container Codes:	A = Amber Glass	P = Plastic	ST = Sterile V = Vial	S = Summa Canister	T = Tedlar Bag	U = Other (please define)			PCB ONLY Soxhlet	Non Soxhlet	
1242017	39 Spruce Street Fact Longmoadow MA 01028	Last Longingadow, Min 01020				ANALYSIS REQUESTED																							Please use the following codes to indicate possible sample concentration within the Conc. Code rolimm above.	H - High; M - Medium; L - Low; C - Clean; U - Unknown	Program Information		andfill	IHSB Orphaned Landfill	State Lead			NELAU and AIHA-LAP, LLU Accredited	Other Chromatogram		
Doc # 379 Rev 1_03242017	(0000				AN		Q	<u>, 31</u>	8	łg	D	भि जुल्	7d 7d		2 2													e following codes to within the Conc	gh; M - Medium; L -											
http://www.contestlabs.com	CHAIN OF CUSTODY RECORD (North Carolina)	Requested Turnaround Time	10-Day		Rush Approval Required	3-Day	4-Day	Data Dalivery			Pkg Required:	threekuttosmenne.	No.	Composite Grap Matrix Conc	Code	/ MALI H													Please use th	H H	l Detection with Regulation and	A CONTRACTOR OF				A 10213 (1221)			Municipality	Brownfield School	
<u>1110-11</u>	CHAIN OF CUST		7-Day	Due Date:	Rust	1-Day	2-Day		Format: PDF	Other:	CLP Like Data Pkg Required:	Email To: 🔥	Fax To #:		terrary lime	10/30/19 11230															North Carolina I	<u> </u>	GWPC	SWSL	IHSB	□ mscc	(rite)		Project Entity	Federal City	
10/ 40002	Phone: 413-525-2332	Fax: 413-525-6405	Email: info@contestlabs.com		Rel Released NC		I-5878 kuel 47			macub		Howedd		nt Sample ID / Description	Date	MW-30 [0]															Date/Time:	10/21/19 1500	pate/Time:	1111111 010 C	' Date/Time:		Date/Time:		Late/ Hime: Proj	Date/Time:	
				Name Yu-WE	3201 Spring Forest	- 1	CLOCK REAL	Project Location: DUNN, NC		roject Manager: Janue THIMA Cult	Con-Test Quote Name/Number:	ient: Jowie 7	1 Limm	Con-Test														ommosts.	OTHER AND .		elinquished by: (signature)	Jun the with	is) ⊳Y:	0	selinquished by: (signature)		steived by: (signature)	(incurrent but (circumon c)		teived by: (signature)	

IMPORTANTI The wildfires are causing hazardous conditions in California. Learn More





Delivered Friday 11/01/2019 at 9:02 am



DELIVERED Signed for by: R.PETRIAS

GET STATUS UPDATES OBTAIN PROOF OF DELIVERY

FROM

Autryville, NC US

TO East Longmeadow, MA US

Shipment Facts

TRACKING NUMBER 411359783302

FedEx Priority Overnight

SERVICE

DELIVERED TO Shipping/Receiving TOTAL PIECES

 RETURN REASON
 TERMS

 Third Party
 Third Party

 SPECIAL HANDLING SECTION
 STANDARD TRANSIT

 Deliver Weekday
 ??

11/01/2019 by 10:30 am

WEIGHT 53.4 lbs / 24.22 kgs

TOTAL SHIPMENT WEIGHT 53.4 lbs / 24.22 kgs

PACKAGING Your Packaging

SHIP DATE
(?)
Thu 10/31/2019

ACTUAL DELIVERY Fri 11/01/2019 9:02 am

Travel History

Friday , 11/01/2019

9:02 am 7:45 am

6:27 am

WINDSOR LOCKS, CT

East Longmeadow, MA

Delivered

On FedEx vehicle for delivery

EAST GRANBY, CT At destination sort facility

https://www.fedex.com/apps/fedextrack/?action=track&tracknumbers=411359783302&locale=en_US&cntry_code=us

Page 22 of 23

Local Scan Time

	nfirmed Sample Co ab Staff Before Relin aples					277 Rev 5 201		ORY							
Login Sample	Receipt Checklist -	(Rejection	Criteria Lis	ting - Us	ing Accep	tance Policy) A	ny False								
	tement will be brou			-	-	• •									
\sim	ME	0		1											
			Date		119	Time	11.0								
Received By	A		Date			nme	402								
How were the samp	les In Cooler	T	No Cooler		On lo	e <u>1</u>	No Ice								
received?	Direct from Sam	pling			Ambie	ent	Melted Ice								
1.1.7 5 4.1		By Gun #	2	•	Actual 7	ſemp- 4.	*								
Were samples with		-						-							
Temperature? 2-6°	······································	_ By Blank #			Actual 1		~ ^	-							
	y Seal Intact?		-	-	oles Tampe		744	-							
	elinquished ?	<u> </u>	-	s Chain /	Agree with	Samples?	<u> </u>	-							
	Are there broken/leaking/loose caps on any samples?														
Is COC in ink/ Legib		-		nples red		-	\	-							
Did COC include a		-T	Analysis			mpler Name		-							
pertinent Informatio			ID's			tion Dates/Times	·1	<u>.</u>							
	illed out and legible?		-												
Are there Lab to Filte	ers?	<u> </u>	Who was notified?												
Are there Rushes?	_	£	•		vas notified			•							
Are there Short Hold			•	Who v	vas notified	1?		•							
Is there enough Volu			-												
Is there Headspace		<u>F</u>	_	MS/MS[£.								
Proper Media/Contai		T	•	-		required?	1	•							
Were trip blanks rec		<u> </u>	-	On COC	>? <u> </u>										
Do all samples have	the proper pH?	M	Acid			Base									
Vials #	Containers:	#			#			#							
Unp-	1 Liter Amb.	2	1 Liter	Plastic		16 oz	z Amb.								
HCL- 3	500 mL Amb.		500 mL	Plastic		8oz An	nb/Clear								
Meoh-	250 mL Amb.		250 mL	Plastic		4oz An	nb/Clear								
Bisulfate-	Flashpoint		Col./B	acteria		2oz An	nb/Clear								
DI-	Other Glass		Other	Plastic		Encore									
Thiosulfate-	SOC Kit		Plasti	c Bag		Frozen:									
Sulfuric-	Perchlorate		Zipl	ock											
			Unused I	Media											
Vials #	Containers:	- #			#			#							
Unp-	1 Liter Amb.		1 Liter	Plastic		16 oz	: Amb.								
HCL-	500 mL Amb.			Plastic			nb/Clear								
Meoh-	250 mL Amb.			Plastic		4oz An	\mb/Clear								
Bisulfate-	Col./Bacteria		Flash	point		2oz An	nb/Clear								
DI-	Other Plastic		Other	Glass		En	core								
Thiosulfate-	SOC Kit		Plasti	c Bag		Frozen:									
Sulfuric-	Perchlorate		Zipl	ock											
Comments:															