


1.0010 17771011	
PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONC. SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD
D1	PROP. APPROX. 2.5" ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YARD
E1	PROP. APPROX. 5" ASPHALT CONC. BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YARD
M 1	MILL EXISTING ASHPALT PAVEMENT 1.5" IN DEPTH
M2	MILLED RUMBLE STRIPS
МЗ	12" MILLED RUMBLE STRIPS
M4	8" MILLED RUMBLE STRIPS (6" EDGE LINE ON MILLED RUMBLE STRIPS)
M5	INCIDENTAL MILLING
Т	EARTH MATERIAL
U	EXISTING PAVEMENT

PROJECT REFERENCE NO.

I-6048 47997.3.1

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE. SEE SHOULDER WEDGE DETAIL

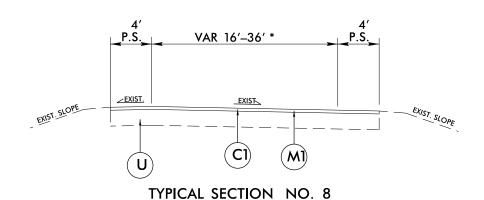

MAPS 12 & 13

INCLUDES ALL ADDITIONAL THRU LANES, TURN LANES AND MEDIAN CROSSOVERS

NOTE: LIMITS OF TYPICAL SECTIONS INDICATED ON THE SUMMARY OF QUANTITIES ARE APPROXIMATE. TYPCIAL SECTION LIMITS AND TRANSITIONS TO BE VERIFIED BY THE ENGINEER IN FIELD.