


SUMMARY OF QUANTITIES FOR SPAN'S "C" AND "D"




	SPAN "C"		SPAN "D"	
	ESTIMATE	ACTUAL	ESTIMATE	ACTUAL
SCARIFYING BRIDGE DECK	144.0 SY		144.0 SY	
HYDRO-DEMOLITION OF BRIDGE DECK	144.0 SY		144.0 SY	
CLASS II SURFACE PREPARATION	1.4 SY		1.4 SY	
CLASS III SURFACE PREPARATION	0.0 SY		0.0 SY	
JOINT DEMOLITION	29.6 SF		29.6 SF	

PAYMENT FOR CLASS II AND CLASS III SURFACE PREP. BASED UPON SQUARE FEET OF ADDITIONAL DEMOLITION REQUIRED FOLLOWING HYDRO-DEMOLITION OF BRIDGE DECK, SEE "OVERLAY SURFACE PREPARATION" SPECIAL PROVISION.

THE EXISTING BRIDGE SURFACE HAS AN ASPHALT WEARING SURFACE. IT IS POSSIBLE THAT CLASS II SURFACE PREPARATION MIGHT BE NECESSARY, BUT CANNOT BE ESTIMATED WITH THE AWS PRESENT. THE QUANTITY INDICATED IS FOR BIDDING PURPOSES ONLY. THE ACTUAL QUANTITY SHALL BE CONFIRMED AFTER SCARIFICATION AND HYDRO-DEMOLITION OF THE BRIDGE DECK.

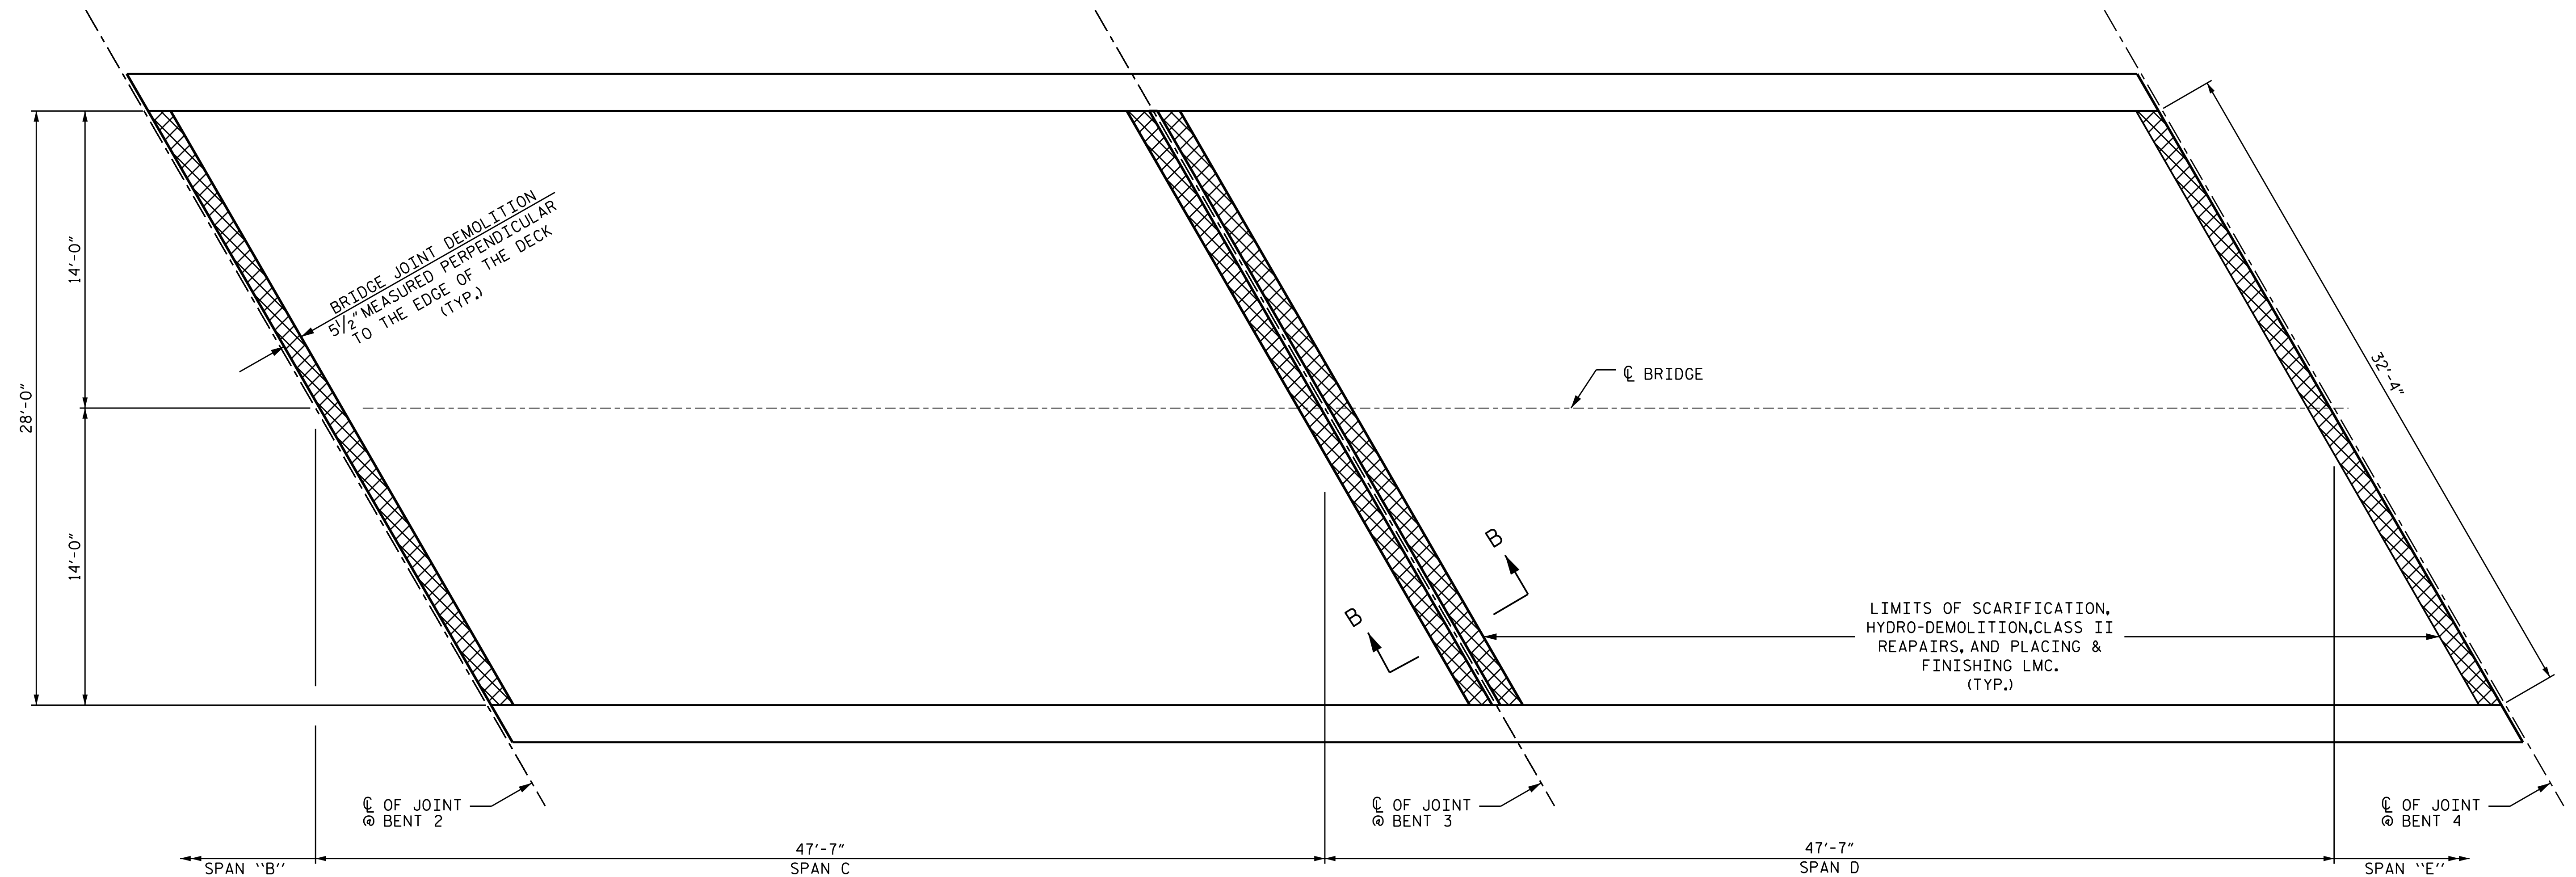

PLAN OF SPAN "C" & "D"
(SEE JOINT DETAIL FOR SECTION A-A & B-B)


-  SCARIFYING BRIDGE DECK
-  APPROX. AREA CLASS II SURFACE PREPARATION
-  BRIDGE JOINT DEMOLITION

DRAWN BY : M. WELDON DATE : 11/2014
CHECKED BY : F. ASEFNIA DATE : 11/2014

23-JAN-2015 10:22
S:\PRS\POC\Squad C\Preservation_Projects\I-5308\DGN\I5308_SD.146_plan_span.dgn
fosefnia

PROJECT NO. I-5308
ROBESON COUNTY
BRIDGE NO.: 146

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
RALEIGH
SUPERSTRUCTURE
SURFACE PREPARATION
SPANS "C" & "D"

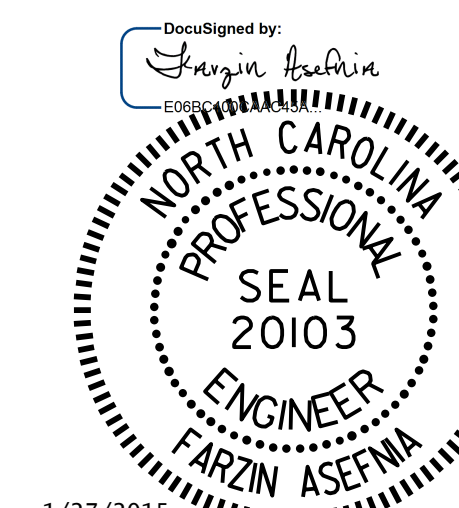

REVISIONS						SHEET NO.	
NO.	BY:	DATE:	NO.	BY:	DATE:	TOTAL SHEETS	
1			3			S-15	
2			4			23	