

FOUNDATION LAYOUT

DIMENSIONS LOCATING PILES ARE SHOWN TO PILE CENTERLINE AT BOTTOM OF CAP


NOTES:

1. FOR DRILLED PIERS, SEE SECTION 411 OF THE STANDARD SPECIFICATIONS.
2. DRILLED PIERS AT BENT NO.1 ARE DESIGNED FOR A FACTORED RESISTANCE OF 538 TONS PER PIER.
3. INSTALL DRILLED PIERS AT BENT NO.1 TO A TIP ELEVATION NO HIGHER THAN 706 FT AND PENETRATION OF AT LEAST 8 FT INTO ROCK AS DEFINED BY ARTICLE 411-1 OF THE STANDARD SPECIFICATIONS.
4. CSL TUBES ARE REQUIRED AND CSL TESTING MAY BE REQUIRED FOR DRILLED PIERS. THE ENGINEER WILL DETERMINE THE NEED FOR CSL TESTING. FOR CSL TESTING, SEE SECTION 411 OF THE STANDARD SPECIFICATIONS.
5. FOR PILES, SEE SECTION 450 OF THE STANDARD SPECIFICATIONS.
6. PILES AT END BENT NO.1 AND 2 ARE DESIGNED FOR A FACTORED RESISTANCE OF 109 TONS PER PILE.
7. DRIVE PILES AT END BENT NO.1 TO A REQUIRED DRIVING RESISTANCE OF 185 TONS PER PILE.
8. DRIVE PILES AT END BENT NO.2 TO A REQUIRED DRIVING RESISTANCE OF 284 TONS PER PILE. THIS REQUIRED DRIVING RESISTANCE INCLUDES ADDITIONAL RESISTANCE FOR DOWNDRAG.
9. IT HAS BEEN ESTIMATED THAT A HAMMER WITH AN EQUIVALENT RATED ENERGY IN THE RANGE OF 60,000-80,000 FT-LBS PER BLOW WILL BE REQUIRED TO DRIVE PILES AT END BENT NO.2. THIS ESTIMATED ENERGY RANGE DOES NOT RELEASE THE CONTRACTOR FROM PROVIDING DRIVING EQUIPMENT IN ACCORDANCE WITH SUBARTICLE 450-3(D)(2) OF THE STANDARD SPECIFICATIONS.
10. TESTING PILES WITH THE PDA DURING DRIVING, RESTRIKING OR REDRIVING MAY BE REQUIRED. THE ENGINEER WILL DETERMINE THE NEED FOR PDA TESTING. FOR PDA TESTING, SEE SECTION 450 OF THE STANDARD SPECIFICATIONS (AND FOR PILE DRIVING CRITERIA, SEE PILE DRIVING CRITERIA PROVISION).
11. DRILLED-IN PILES ARE REQUIRED FOR INTEGRAL END BENT NO.1. EXCAVATE HOLES AT PILE LOCATIONS TO ELEVATION 709 FT. FILL THE BOTTOM 3 FT OF HOLES FOR PILE EXCAVATION WITH CONCRETE AND THE REST OF HOLES WITH CLASS II OR III SELECT MATERIAL THAT MEETS SECTION 1016 OF THE STANDARD SPECIFICATIONS. FOR PILE EXCAVATION, SEE SECTION 450 OF THE STANDARD SPECIFICATIONS.

PROJECT NO. R-5737
DAVIDSON COUNTY
 STATION: 61+02.86 -L-
 SHEET 2 OF 5

DRAWN BY : JAE DATE : 8/21
 CHECKED BY : ZHB DATE : 8/21
 DESIGN ENGINEER OF RECORD: MTP DATE : 8/21

Dewberry
 2610 WYCLIFF ROAD
 SUITE 410
 RALEIGH, NC 27607
 PHONE: 919.881.9939
 NC COA No. F-0929

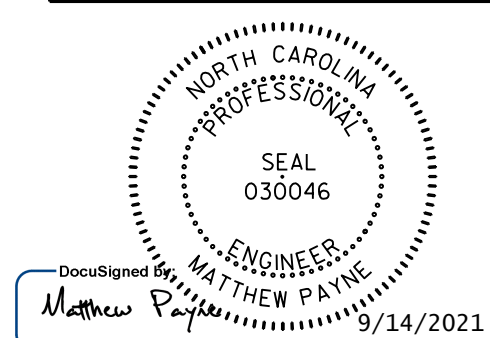

STATE OF NORTH CAROLINA
 DEPARTMENT OF TRANSPORTATION
 RALEIGH

FOUNDATION LAYOUT PLAN

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

REVISIONS						SHEET NO.
NO.	BY:	DATE:	NO.	BY:	DATE:	
1			3			S1-2
2			4			TOTAL SHEETS 25