

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 13

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B
AND TEMPORARY ROCK SILT CHECKS TYPE - A AT
DRAINAGE OUTLETS.

NOTE:
PERIMETER EROSION CONTROL MEASURES SHALL BE
INSTALLED DURING CLEARING AND GRUBBING PHASE.

66 x 30 x 3
1.5 inch Skimmer
with 1.375 inch
Orifice Diameter
15 ft. weir
ID 13.6 CG

44 x 22 x 3
1.5 inch Skimmer
with 0.875 inch
Orifice Diameter
7 ft. weir
ID 13.1 B

56 x 28 x 3
1.5 inch Skimmer
with 1.125 inch
Orifice Diameter
12 ft. weir
ID 13.2 B


50 x 25 x 3
1.5 inch Skimmer
with 1.0 inch
Orifice Diameter
18 ft. weir
ID 13.4 CG

68 x 34 x 3
1.5 inch Skimmer
with 1.375 inch
Orifice Diameter
17 ft. weir
ID 13.5 CG

40 x 18 x 3
1.5 inch Skimmer
with 0.625 inch
Orifice Diameter
5 ft. weir
ID 13.3 B

MATCHLINE SHEET 12 -L- STA. 133 + 50.00

MATCHLINE SHEET 14 -L- STA. 146 + 50.00

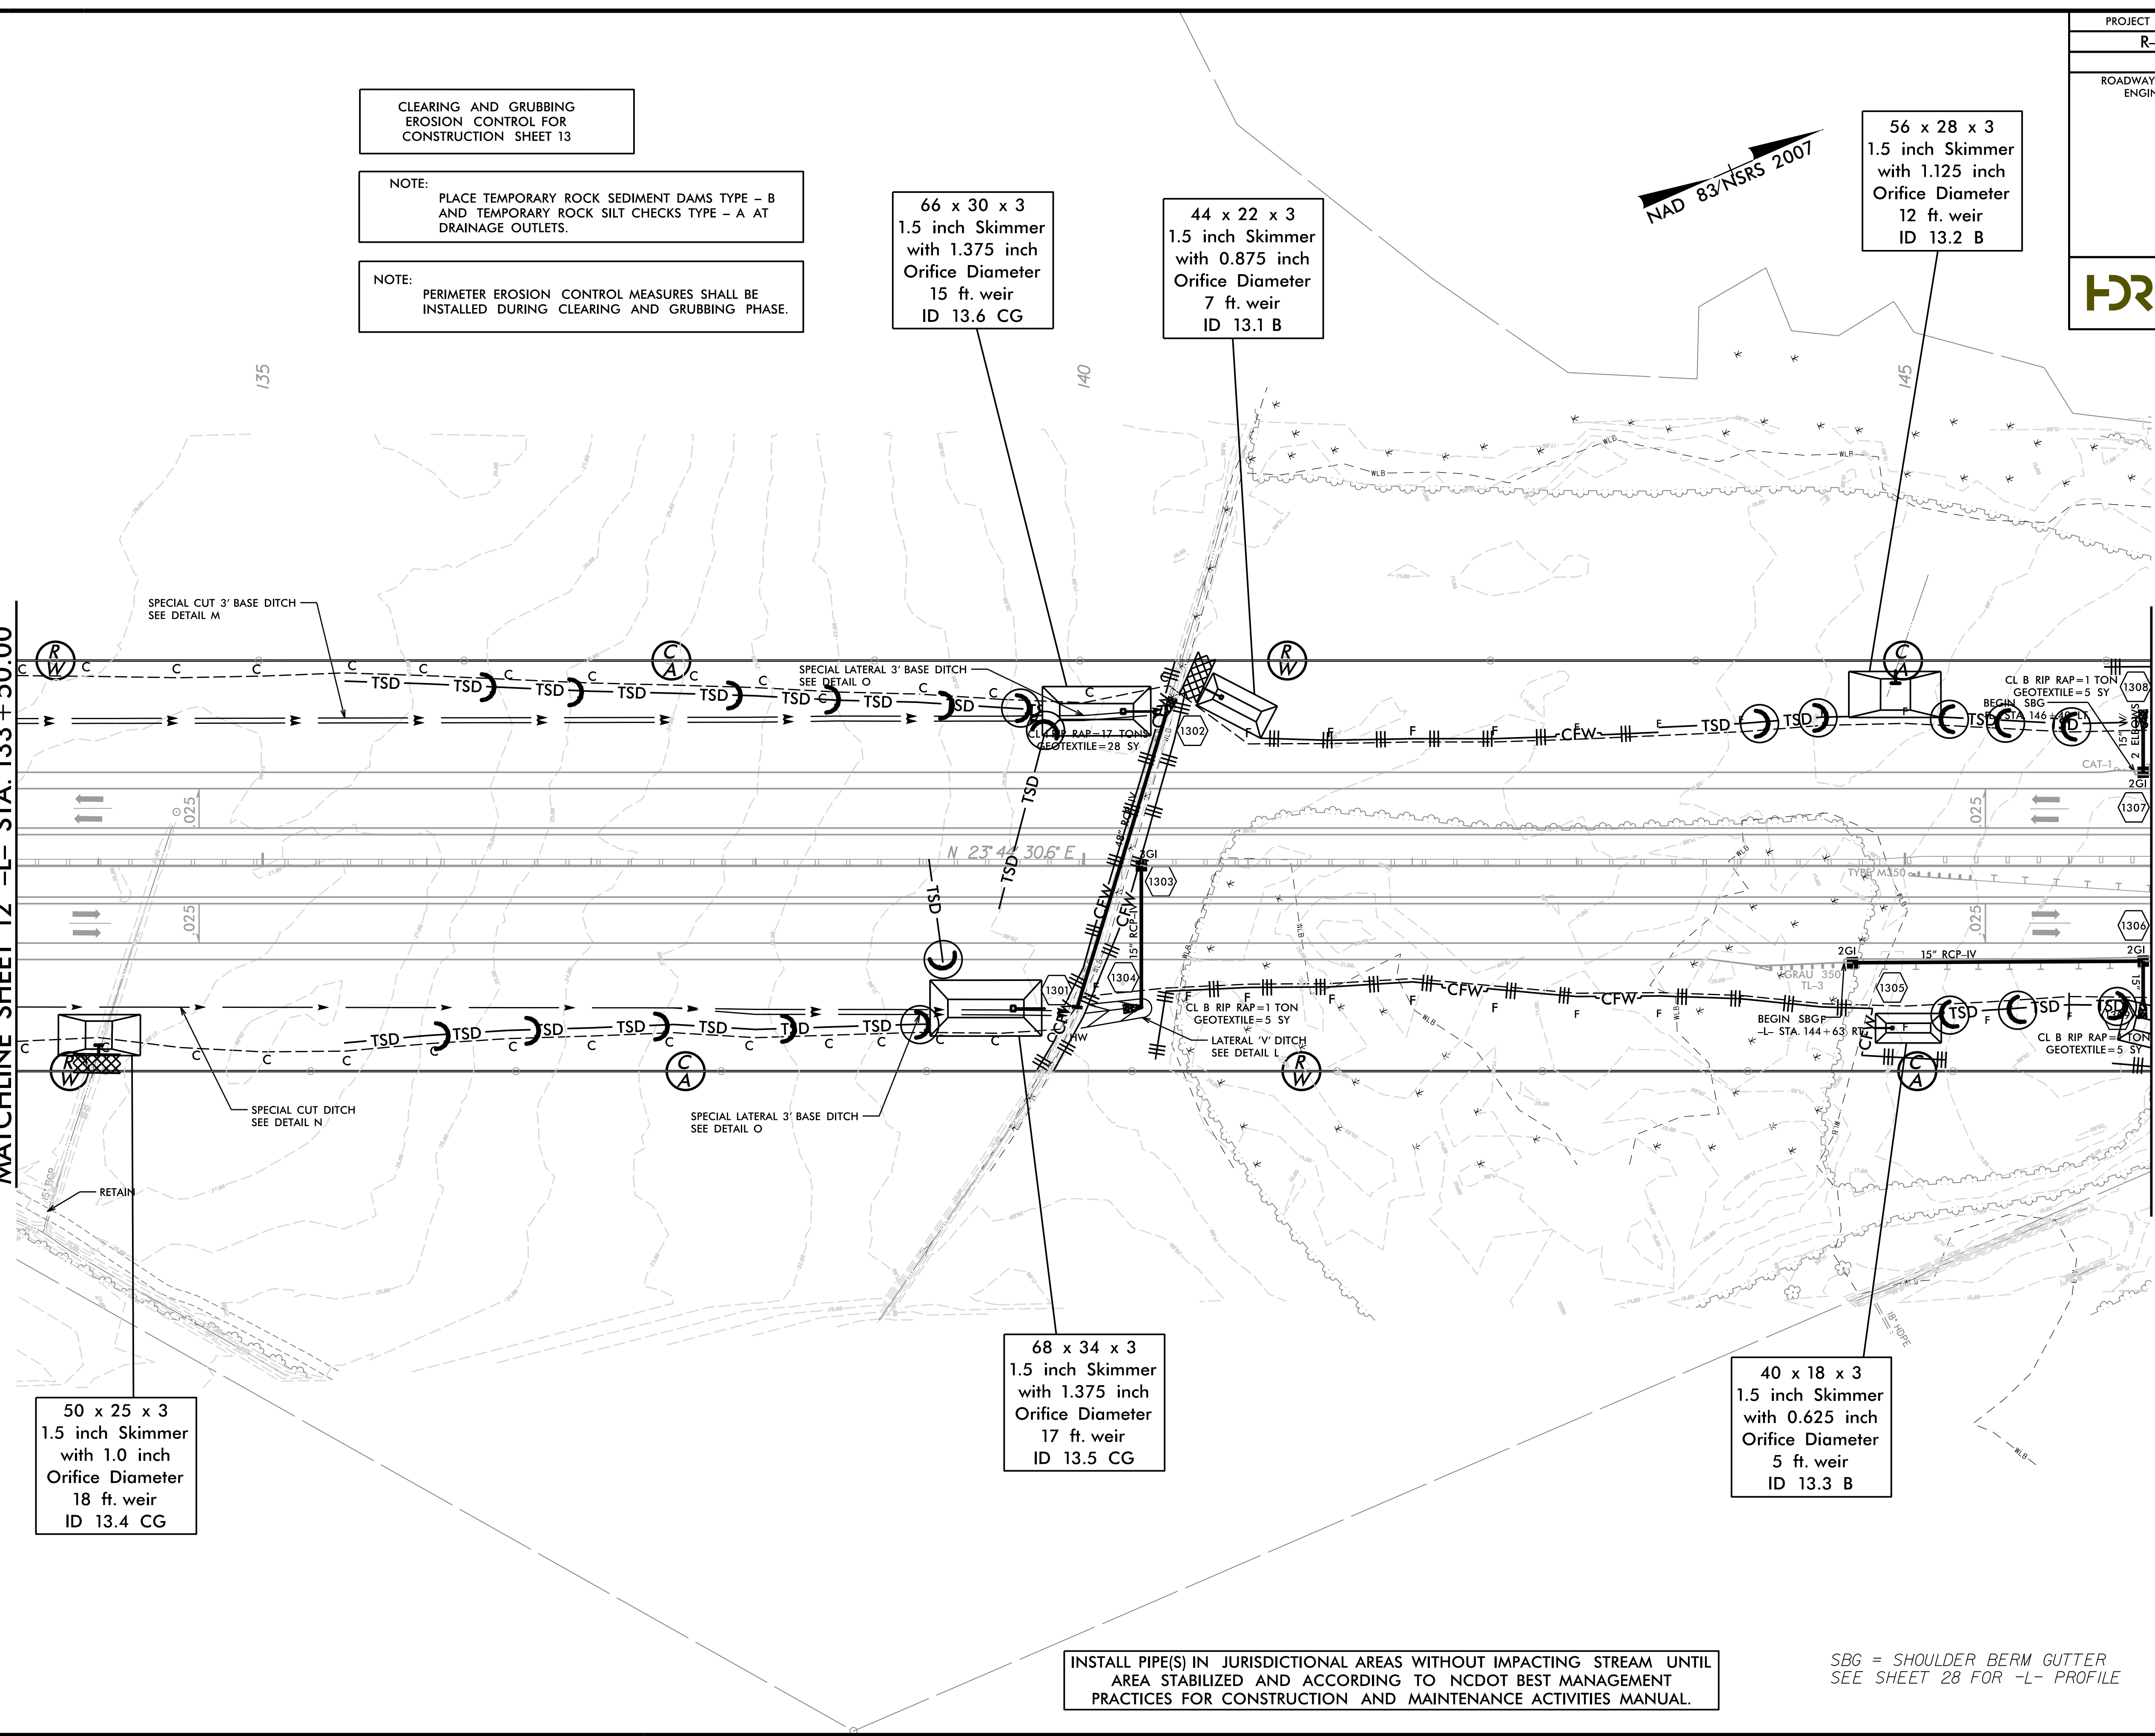

INSTALL PIPE(S) IN JURISDICTIONAL AREAS WITHOUT IMPACTING STREAM UNTIL
AREA STABILIZED AND ACCORDING TO NCDOT BEST MANAGEMENT
PRACTICES FOR CONSTRUCTION AND MAINTENANCE ACTIVITIES MANUAL.

SBG = SHOULDER BERM GUTTER
SEE SHEET 28 FOR -L- PROFILE

REVISIONS

8/17/99

1/22/2015
R-2514B-EC-CG_PSH.dgn
R-2514B-EC-CG_PSH.dgn