

23-AUG-2021 12:01 R:\Structures\FINAL PLANS\Bridge 330\409_023_I5746C_SMU_E1_S9-12_590330.dgn aacole

AS-BUILT REPAIR QUANTITY TABLE										
END BENT 1	QUANTITIES									
	ESTI	ΜΑΤΕ	ACTUAL							
SHOTCRETE REPAIRS	AREA SQ.FT.	VOLUME CU.FT.	AREA SQ.FT.	VOLUME CU.FT.						
CAP & CURTAIN WALL	3.2	1.6								
CONCRETE REPAIRS	AREA SQ.FT.	VOLUME CU.FT.	AREA SQ.FT.	VOLUME CU.FT.						
САР	1.9	1.0								
EPOXY RESIN INJE	LIN. FT.		LIN. FT.							
CAP & CURTAIN WAL	7.0									
EPOXY COATING		G SQ. FT.		SQ. FT.						
TOP OF BENT CAP	210									

VALUES IN CHART REPRESENT ESTIMATED REPAIR TOTALS AFTER REMOVAL OF UNSOUND CONCRETE, MINIMUM OF 1"BEHIND REBAR AND MINIMUM 2" CLEARANCE TO SAWCUT. FOR REPAIR DETAILS, SEE "TYPICAL CAP AND COLUMN REPAIR DETAILS" SHEET.

NOTES

REPAIR LOCATIONS AND ESTIMATE OF QUANTITIES ARE BASED ON THE BEST INFORMATION AVAILABLE.IF ADDITIONAL REPAIRS NOT SHOWN ON THE DRAWINGS ARE DEEMED NECESSARY BY THE ENGINEER, THE ENGINEER SHALL NOTE ON THE DRAWINGS THE APPROXIMATE LOCATION AND DESCRIPTION OF THE REPAIRS AND ENTER THE ACTUAL QUANTITIES INTO THE AS-BUILT REPAIR QUANTITY TABLE.

CONCRETE REPAIRS MAY BE SUBSTITUTED IN LIEU OF SHOTCRETE REPAIRS WITH THE APPROVAL OF THE ENGINEER.

FOR SHOTCRETE REPAIR, SEE SPECIAL PROVISIONS.

FOR CONCRETE REPAIR, SEE SPECIAL PROVISIONS.

FOR EPOXY RESIN INJECTION, SEE SPECIAL PROVISIONS.


CLEAN AND REMOVE DEBRIS FROM THE TOP OF THE CAP AND APPLY EPOXY PROTECTIVE COATING.EPOXY COATING SHALL BE APPLIED TO THE TOP SURFACE OF THE CAP. THE CONTRACTOR SHALL NOT COAT THE AREA OF THE CAP BENEATH THE MASONRY PLATES. FOR EPOXY COATING, SEE SPECIALPROVISIONS.

SHOTCRETE REPAIR AREA

 \boxtimes CONCRETE REPAIR AREA

CONTRESIN INJECTION (ERI)

PROJECT NO. 1-5746C MECKLENBURG COUNTY BRIDGE NO. 590330

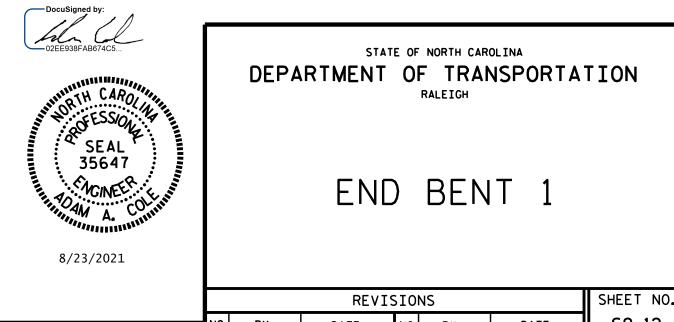

DOCUMENT NOT CONSIDERED	NO.	BY:	DATE:	N0.	BY:	DATE:	S9-12
FINAL UNLESS ALL	1			3			TOTAL SHEETS
SIGNATURES COMPLETED	2			4			274