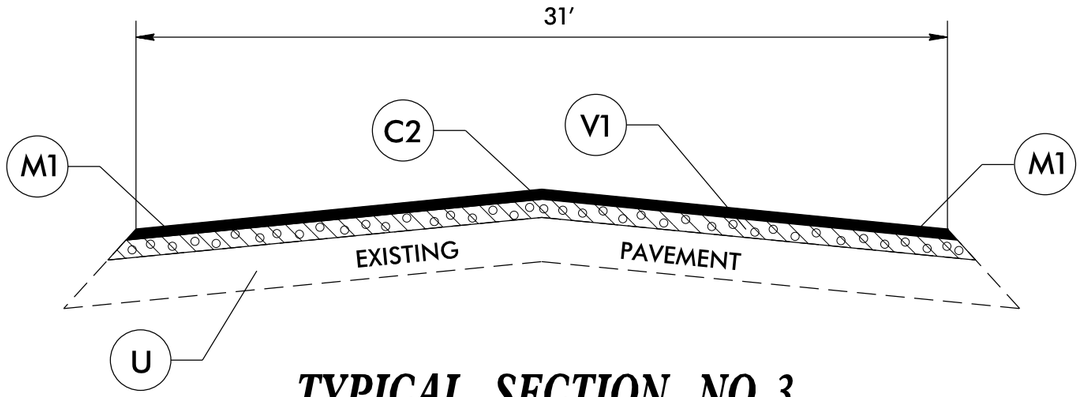

TYPICAL SECTION NO. 3

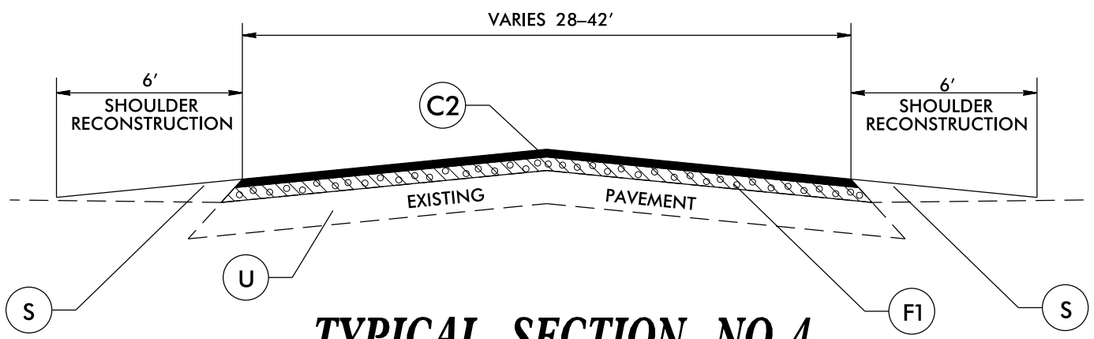

TYPICAL SECTION NO. 4

PAVEMENT SCHEDULE

C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
F1	PROP. ASPHALT SURFACE TREATMENT, MAT COAT #78M STONE
M1	MILLED RUMBLE STRIPS (12" INSIDE LANE, 16" OUTER LANE)
S	AGGREGATE SHOULDER BORROW
U	EXISTING PAVEMENT.
V1	MILLING 1.5" IN DEPTH

23-AUG-2021 15:03
22 Resurfacing\Moore October 2021 Submittals\Primary\Moore_Primary_October2021_Maps_Typ.dgn
ketts AT DIVB-3036051