

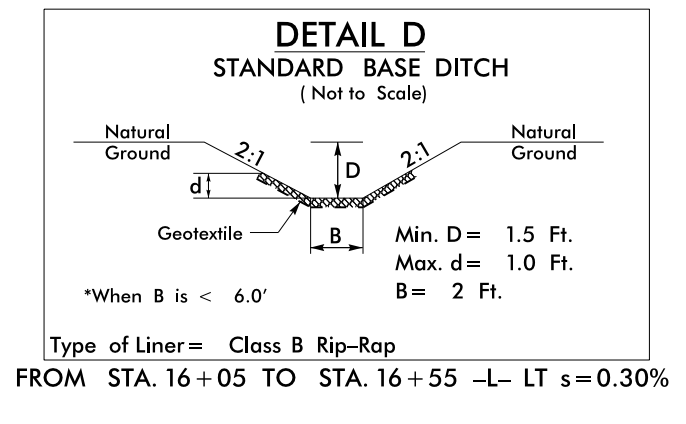
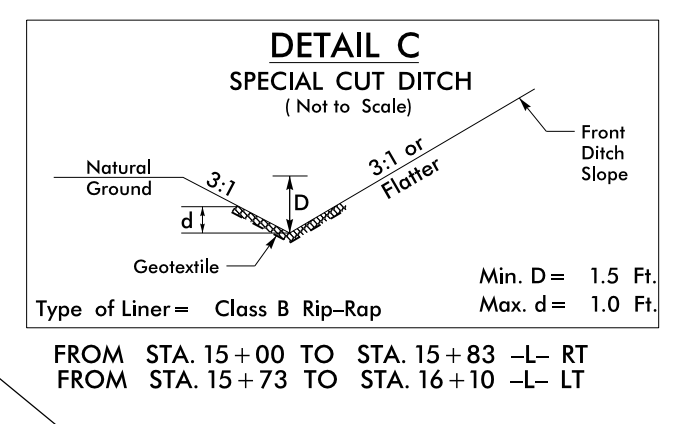
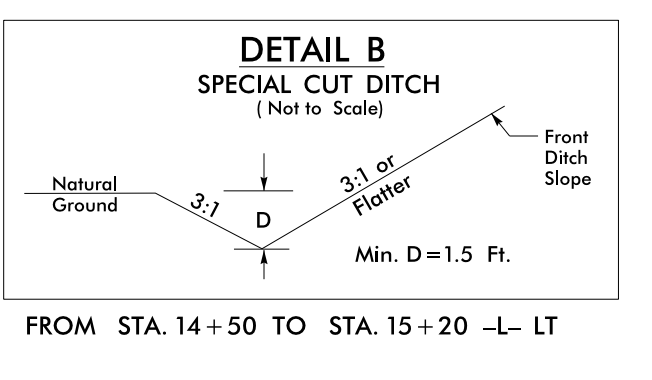
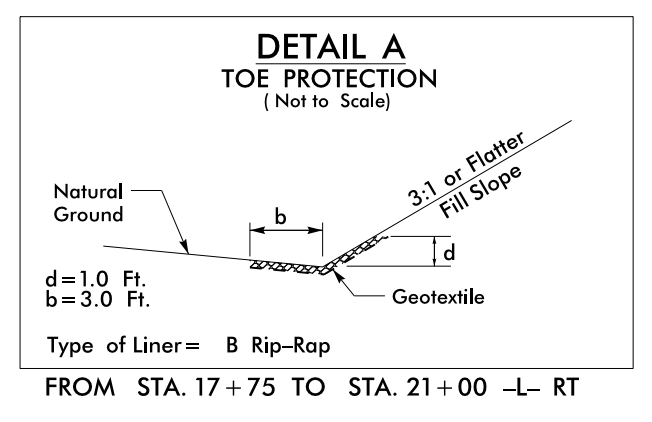


CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 4

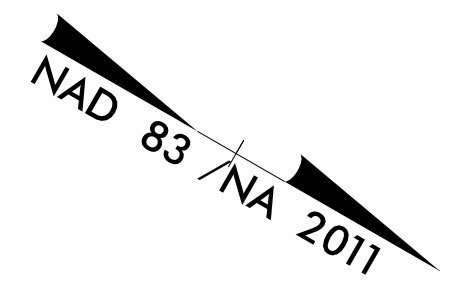

-L-	
PI Sta 20+86.24 $\Delta = 45^{\circ} 22' 21.6''$ (RT) $D = 2^{\circ} 43' 42.1''$ $L = 1,663.00'$ $T = 877.86'$ $R = 2,100.00'$ $RO = \text{SEE PLANS}$ $SE = .06$	
-DRI-	
PI Sta 10+99.84 $\Delta = 19^{\circ} 05' 15.8''$ (LT) $D = 28^{\circ} 38' 52.4''$ $L = 66.63'$ $T = 33.63'$ $R = 200.00'$	-DR2- PI Sta 10+36.29 $\Delta = 14^{\circ} 30' 38.7''$ (LT) $D = 38^{\circ} 11' 49.9''$ $L = 37.99'$ $T = 19.10'$ $R = 150.00'$

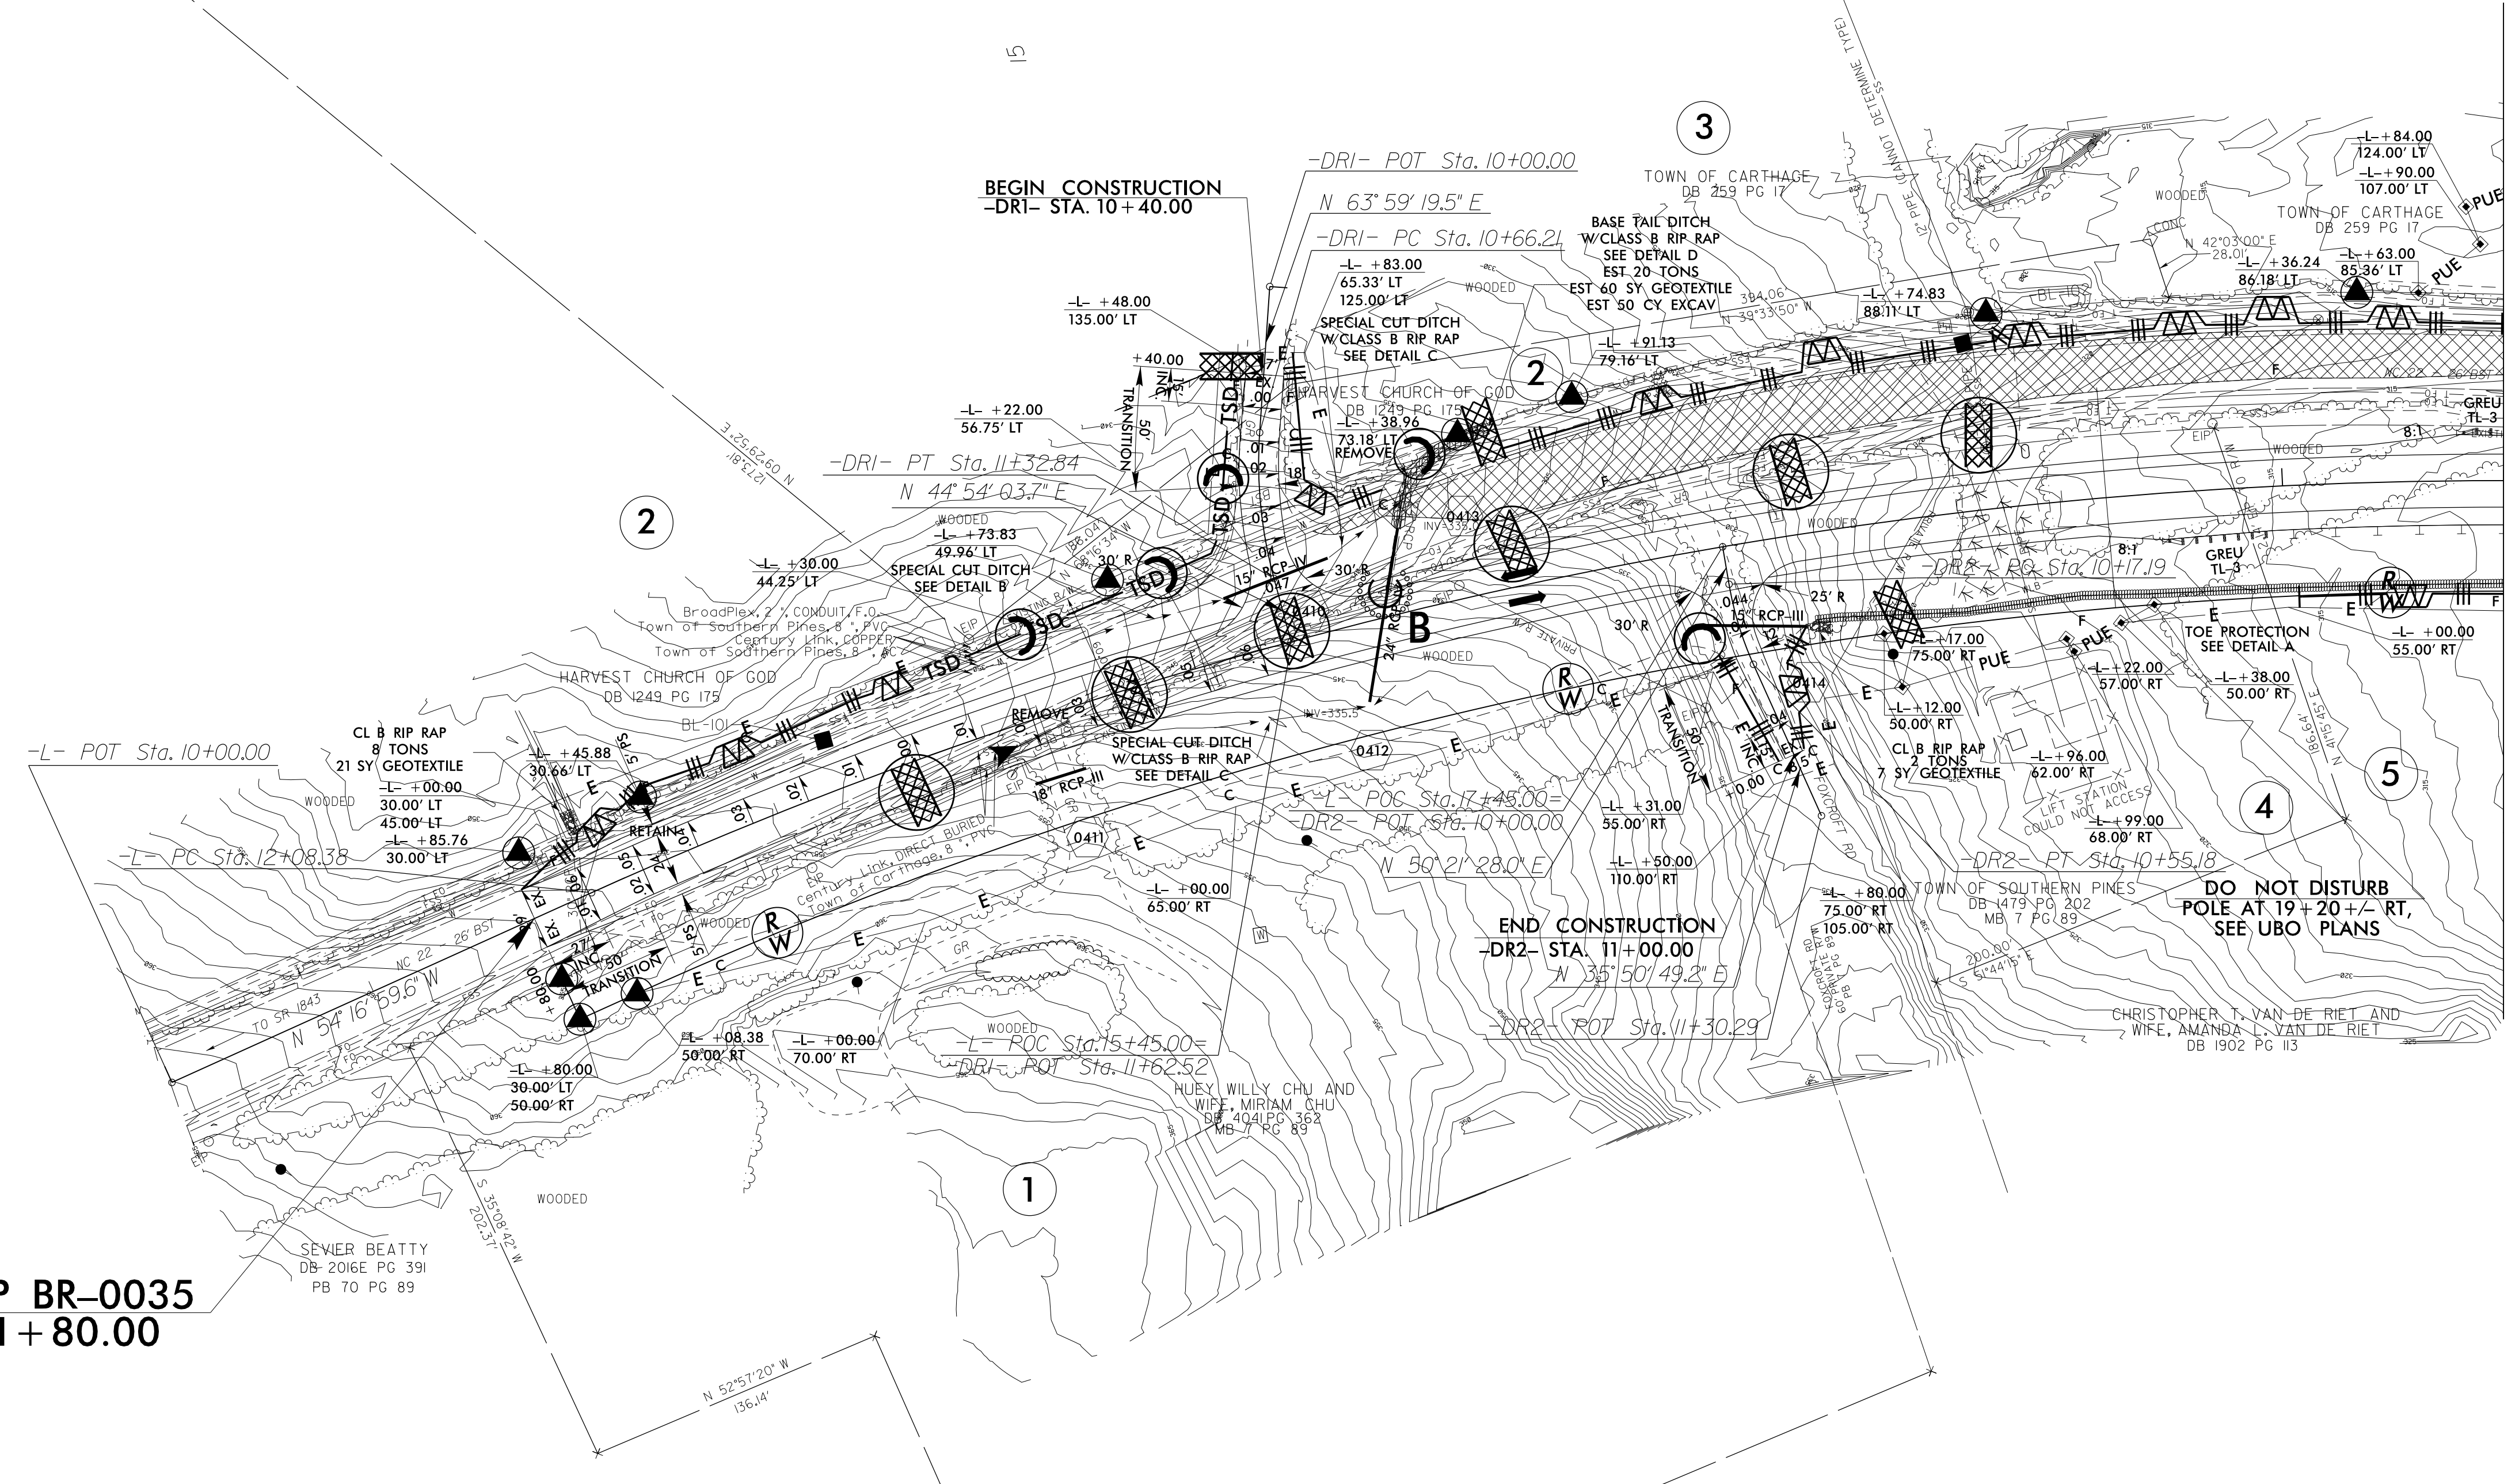

BEGIN TIP BR-0035
-L- STA. 11+80.00

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B
AND TEMPORARY ROCK SILT CHECKS TYPE - A AT
DRAINAGE OUTLETS.

REVISIONS

MATCHLINE -L- STA. 21+00.00 SEE SHEET 5

8/17/99

8/17/99