

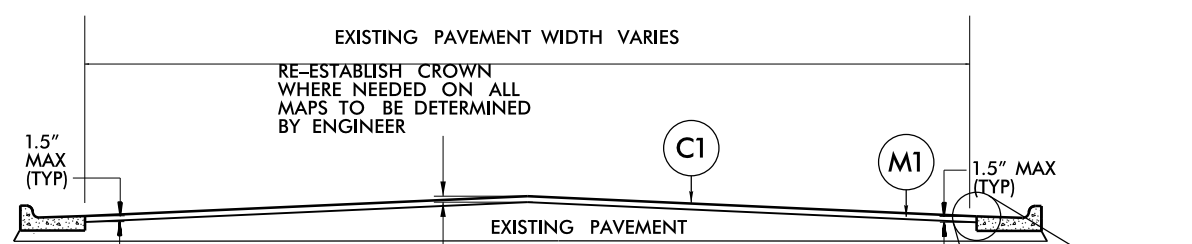





TYPICAL SECTION 6
MAP 1 NC152

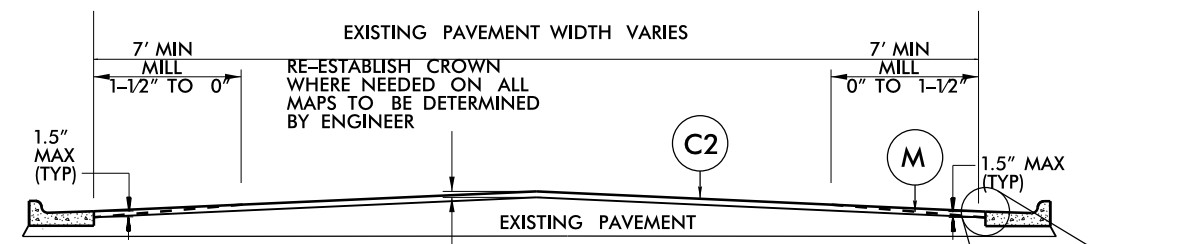



TYPICAL SECTION 9
MAP 15 ANDREWS ST SR1915
MAP 20 S BEAVER ST
MAP 21 HIGHLAND AVE
MAP 23 E MILL ST
MAP 24 E GARDEN ST
MAP 25 E RICE ST
MAP 26 S CORRELL ST



TYPICAL SECTION 7
MAP 1 NC152

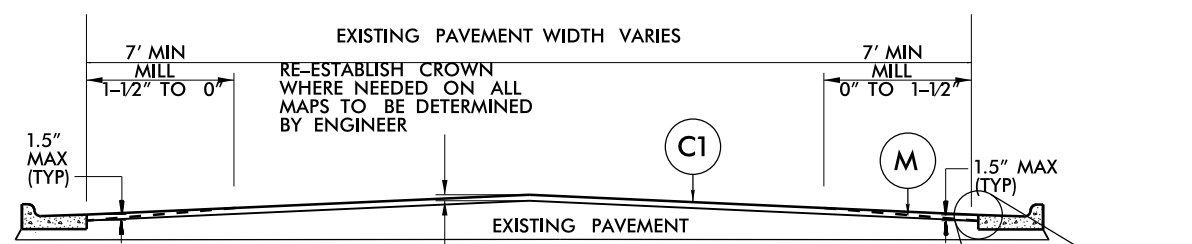

TYPICAL SECTION 10
MAP 4 PATTERSON SR1225
MAP 6 KETCHIE ST SR1227

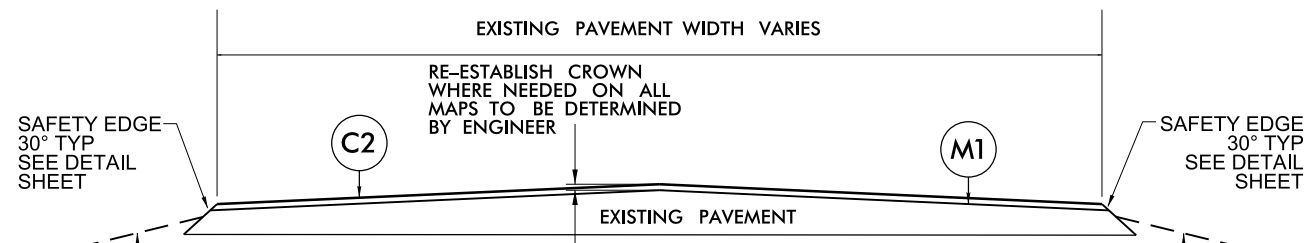

TYPICAL SECTION 8
MAP 1 NC152
MAP 2 NC152
MAP 3 NC153

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ YD.
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ YD.
E	PROP. APPROX. 5½" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, TO BE APPLIED AT AN AVERAGE RATE OF 627 LBS PER SQ YD.
F	ASPHALT SURFACE TREATMENT, MATCOAT, #67M STONE TO BE APPLIED AT AN AVERAGE RATE OF 38 LBS PER SY YD, EMULSION RATE OF 0.40 GAL PER SY YD
F1	ASPHALT SURFACE TREATMENT, MATCOAT, #78M STONE TO BE APPLIED AT AN AVERAGE RATE OF 18 LBS PER SY YD, EMULSION RATE OF 0.35 GAL PER SY YD
M	MILL ASPHALT PAVEMENT, 0" TO 1½"
M1	MILL ASPHALT PAVEMENT, 1½" DEPTH
M2	MILL ASPHALT PAVEMENT, 2" DEPTH
S	SHOULDER RECONSTRUCTION (SEE DETAIL)