



**TYPICAL SECTION 11**  
MAP 4 PATTERSON ST SR1225

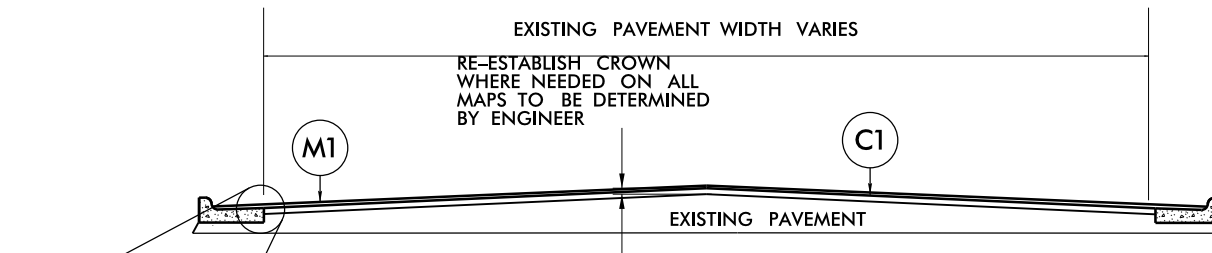


**TYPICAL SECTION 14**  
MAP 6 KETCHIE ST SR1227

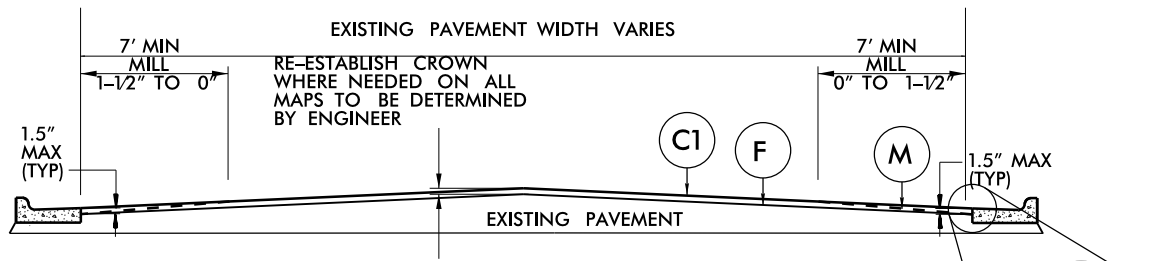


**TYPICAL SECTION 12**  
MAP 16 OLD UNION CHURCH RD SR1915

MILL TO THIS LINE

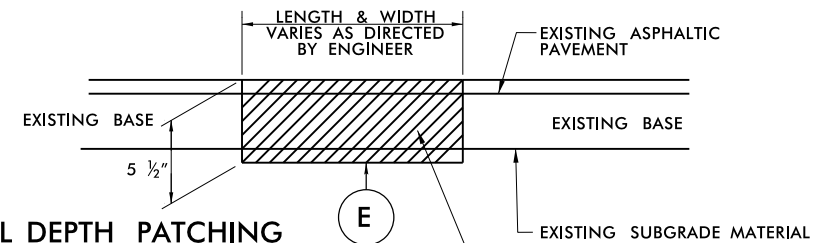

**FULL DEPTH PATCHING**  
MAP 7 E 22ND ST SR1254  
MAP 9 EBENEZER RD SR1322  
MAP 10 WILKINSON RD SR  
MAP 16 OLD UNION CHURCH RD SR1915  
MAP 19 LONG FERRY RD SR2120

EXISTING ASPHALTIC PAVEMENT BASE AND/OR SUBGRADE MATERIAL TO BE REMOVED AND REPLACED WITH 5 1/2" 119.0C

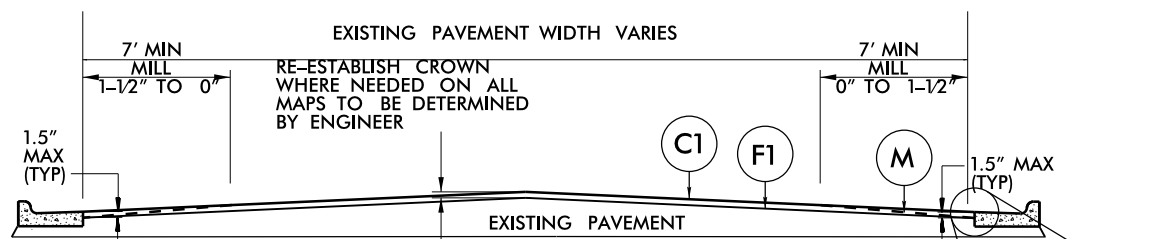

**TYPICAL SECTION 13**  
MAP 7 E 22ND ST SR1254

MILL TO THIS LINE

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ. YD.
C2	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ. YD.
E	PROP. APPROX. 5 1/2" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B, TO BE APPLIED AT AN AVERAGE RATE OF 627 LBS PER SQ. YD.
F	ASPHALT SURFACE TREATMENT, MATCOAT, #67M STONE TO BE APPLIED AT AN AVERAGE RATE OF 38 LBS PER SY YD, EMULSION RATE OF 0.40 GAL PER SY YD
F1	ASPHALT SURFACE TREATMENT, MATCOAT, #78M STONE TO BE APPLIED AT AN AVERAGE RATE OF 18 LBS PER SY YD, EMULSION RATE OF 0.35 GAL PER SY YD
M	MILL ASPHALT PAVEMENT, 0" TO 1 1/2"
M1	MILL ASPHALT PAVEMENT, 1 1/2" DEPTH
M2	MILL ASPHALT PAVEMENT, 2" DEPTH
S	SHOULDER RECONSTRUCTION (SEE DETAIL)