
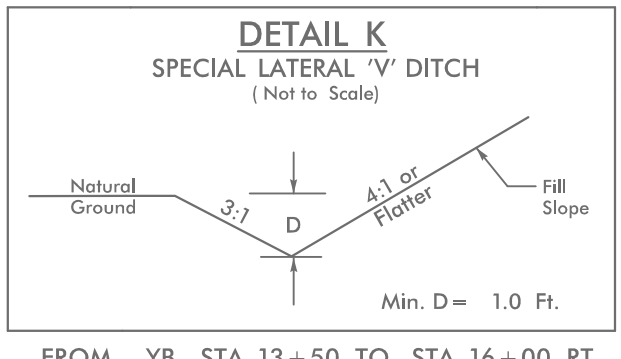
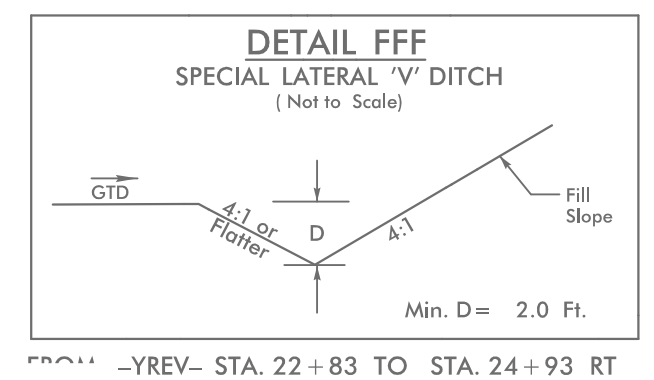
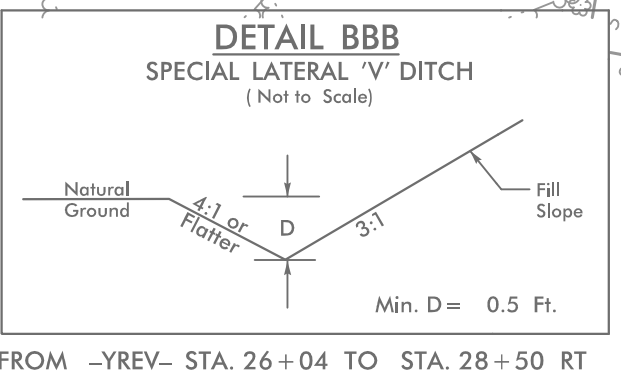
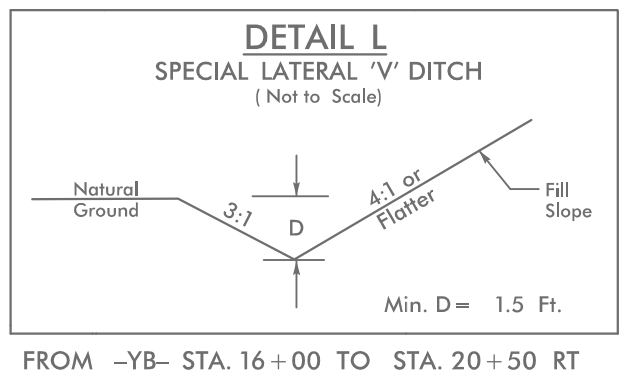


5/14/99

PROJECT REFERENCE NO.	SHEET NO.
R-5021	EC-71/CONST.33
RW SHEET NO.	34
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

NOTE:
 UTILIZE COIR FIBER MATTING ADJACENT TO WETLANDS /JURISDICTIONAL AREAS, AND AS DIRECTED

Place Matting for Erosion Control or Coir Fiber Mat, as directed, on Slope as Work Allows.
 -YB- Sta. 13+00 to Sta. 19+00 LT
 -YREV- Sta. 23+50 to Sta. 28+50 LT
 -YREV- Sta. 26+00 to Sta. 28+50 RT

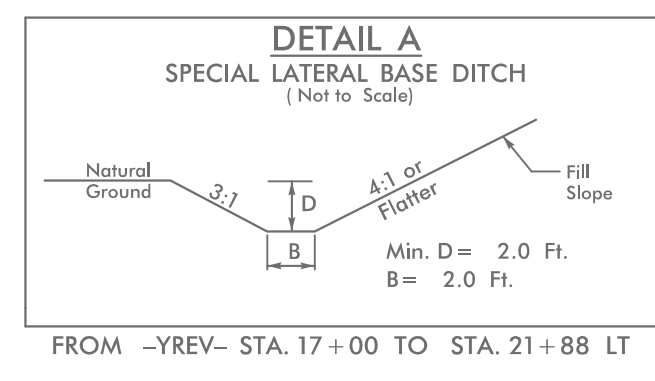


83 x 12 x 2
 4 ft. weir
 (See Infiltration Basin Detail)
 ID 33.03B

65 x 10 x 2
 4 ft. weir
 (See Infiltration Basin Detail)
 ID 33.04B

60 x 22 x 2
 4 ft. weir
 (See Infiltration Basin Detail)
 ID 33.05B

2.0 inch Skimmer with 1.75 inch Orifice Diameter
 13 ft. weir with 4.75 ft. weir height
 ID 33.01B
 (See Earthen Dam with Skimmer Detail)

75 x 20 x 3
 ID 33.06F

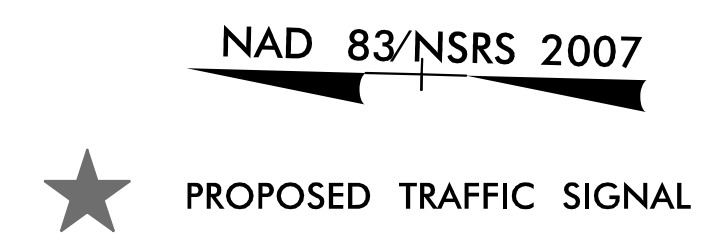

MATCH LINE -YREV- STA 17+00.00
 SEE SHEET 32

MATCH LINE -YB- STA 20+50.00
 SEE SHEET 6

MATCH LINE -YREV- STA 28+50.00
 SEE SHEET 6

BEGIN CONSTRUCTION
 -DRW01- Sta. 11+40.00

BEGIN CONSTRUCTION
 -YD- Sta. 10+25.00
 -YD- POT Sta. 10+00.00

BEGIN CONSTRUCTION
 -YC- Sta. 10+25.00

4/23/2021
 EC-PSH33.dgn