


**NOTES:**  
 ALL REINFORCING STEEL IN THE DECK AND PARAPETS SHALL BE EPOXY COATED. CLEAR COVER TO ALL REINFORCING IS 2" MINIMUM UNLESS NOTED OTHERWISE.  
 FOR CONCRETE PARAPET DETAILS, SEE "CONCRETE PARAPET DETAILS" SHEET.  
 FOR ARCHITECTURAL TREATMENTS, SEE "PARAPET ARCHITECTURAL DETAILS" SHEET.  
 DESIGN INCLUDES WEIGHT OF 6" ADDITIONAL BALLAST TO ACCOUNT FOR FUTURE RESURFACING OF TRACK.  
 THE DECK SLAB SHALL BE CONSTRUCTED USING REMOVABLE FORMS.

PROJECT NO. P-4900A  
ROBESON COUNTY  
 STATION: POC 38+93.36 -L-  
 MILE POST: 0.55

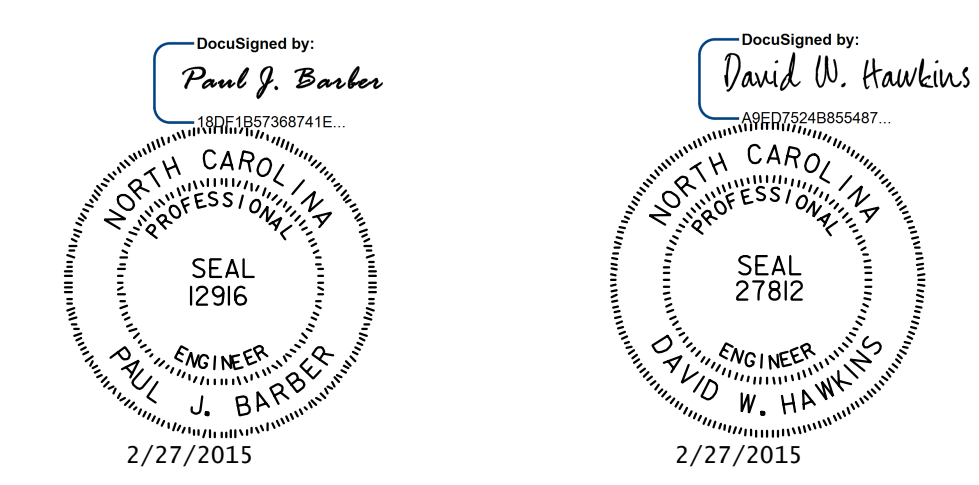

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH  
**SUPERSTRUCTURE**  
 TYPICAL SECTION

<b>HNTB</b> HNTB NORTH CAROLINA, P.C. License No. C-1554 343 E. Six Forks Rd., Suite 200, Raleigh, N.C. 27609						REVISIONS						SHEET NO. <b>S-24</b>				
DRAWN BY	M. WRIGHT	DATE	7/14	NO.	3	BY:		DATE:		NO.	4	BY:		DATE:		TOTAL SHEETS
CHECKED BY	P. BARBER	DATE	7/14													<b>54</b>
												DWG. NO.	5			