
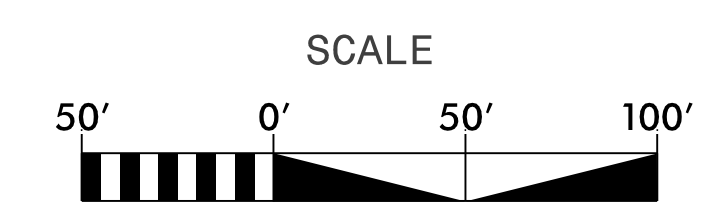


5/14/19
MATCHLINE Y1 STA. 21+00 SEE SHEET UC-4
MATCHLINE Y1 STA. 34+00 SEE SHEET UC-6

- NOTES:**
1. PROPOSED GAS INSTALLED 5 FEET INSIDE PROPOSED/EXISTING R/W LINE UNLESS OTHERWISE NOTED.
 2. ABANDONED GAS LINE SHALL BE GROUTED AND CAPPED.
 3. SEE SHEET UC-16 FOR GL-INTE PROFILE.
 4. SEE SHEETS UC-20 THRU UC-22 FOR LAUNCHER & RECEIVER STATION MECHANICAL DRAWINGS.
 5. SEE SHEET UC-23 FOR LAUNCHER & RECEIVER STATION GRADING PLAN.
 6. ABANDONED GAS LINES NOTED AT THE "DOWN AND UNDER" AND AT THE LAUNCHER & RECEIVER STATION SHALL BE REMOVED.
 7. "DOWN AND UNDER" RELOCATION ON LINE T-13 SHALL BE COMPLETED BEFORE NEW LAUNCHER & RECEIVER STATION IS PUT INTO SERVICE.
 8. REFER TO SHEET UC-3F FOR CONSTRUCTION SEQUENCE OF LAUNCHER & RECEIVER STATION.

Conflict	Size	Drainage Pipe			Gas Pipe		Proposed Clearance	
		Top	Invert	Bottom	Top	Bottom		
3	15" RCP	2991.29	2989.85	2989.66	2985.66	2985.13	2985.11	4 ft

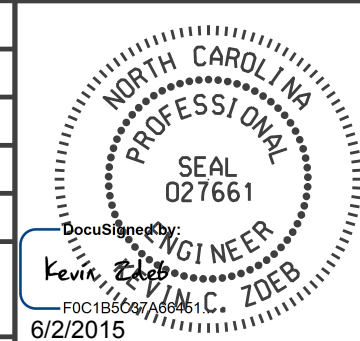

PROJECT REFERENCE NO. R-2915A	SHEET NO. UC-5
DESIGNED BY: SAG	 NORTH CAROLINA DEPARTMENT OF TRANSPORTATION UTILITIES ENGINEERING SEC. PHONE: (919) 707-6690 FAX: (919) 250-4151
DRAWN BY: SAG	
CHECKED BY: KCZ	
APPROVED BY: KCZ	
REVISED:	UTILITY CONSTRUCTION PLANS ONLY

