




PLAN

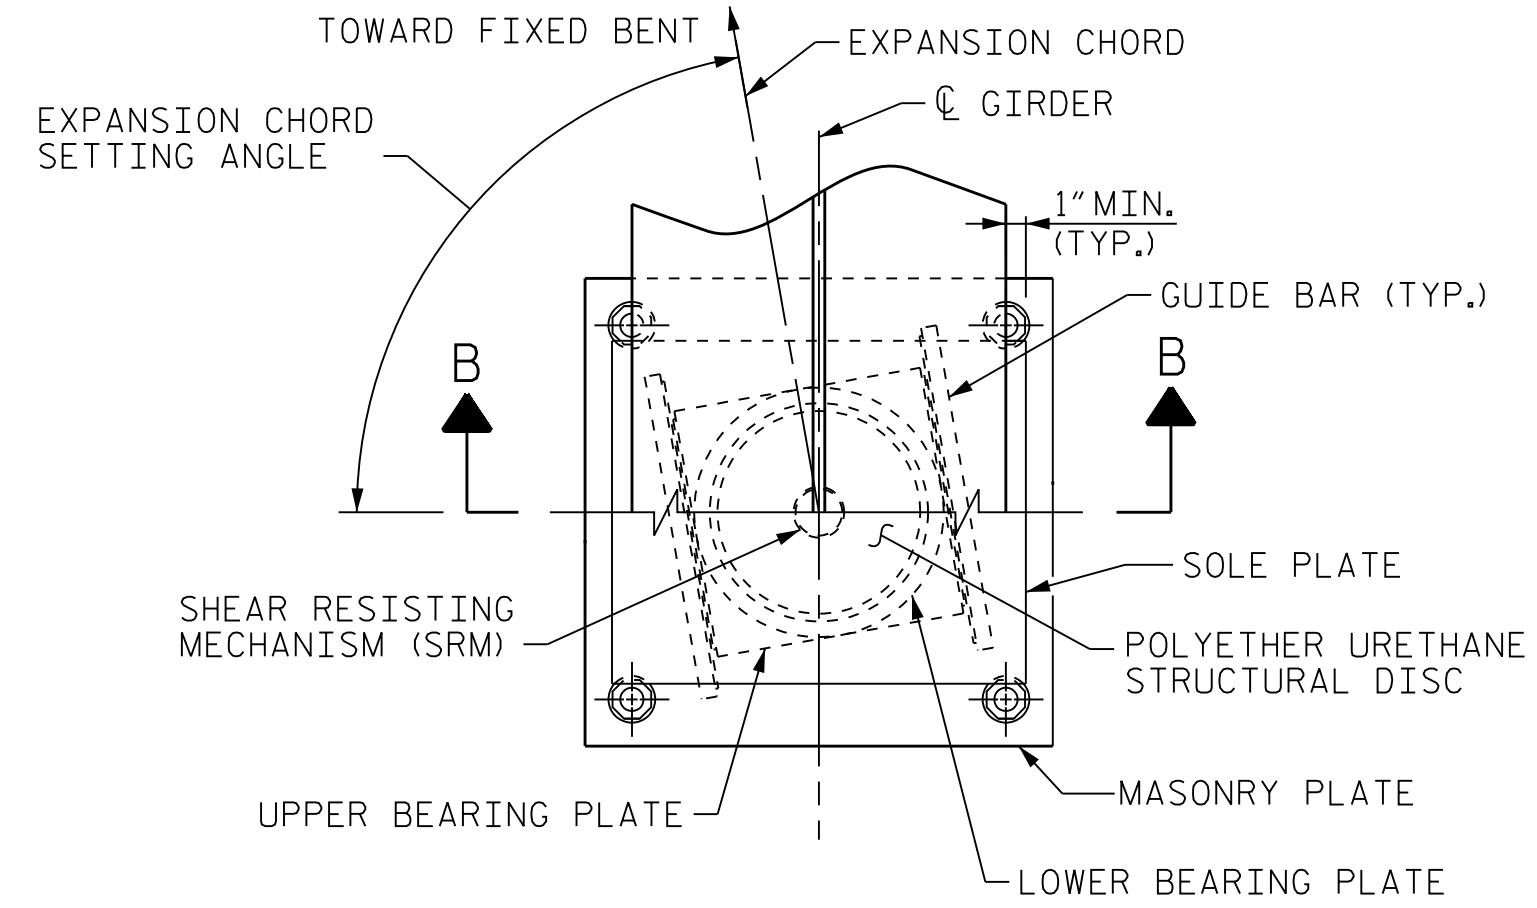


PLAN

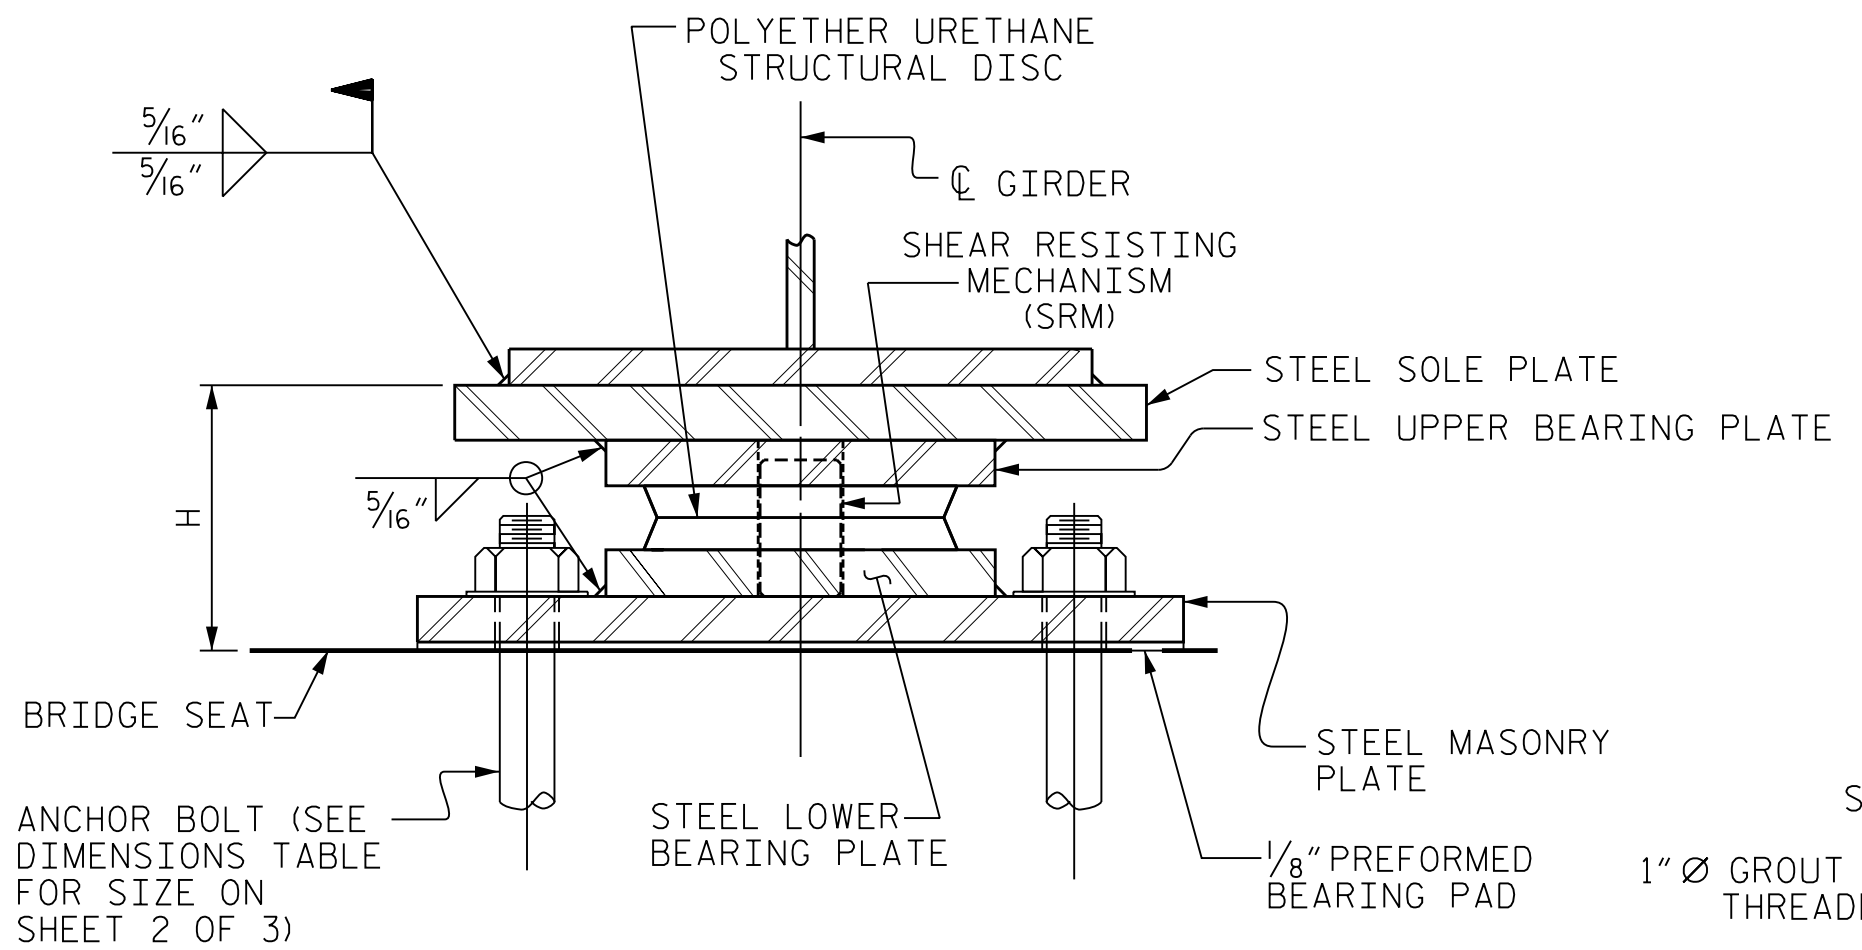

SECTION A-A  
FIXED

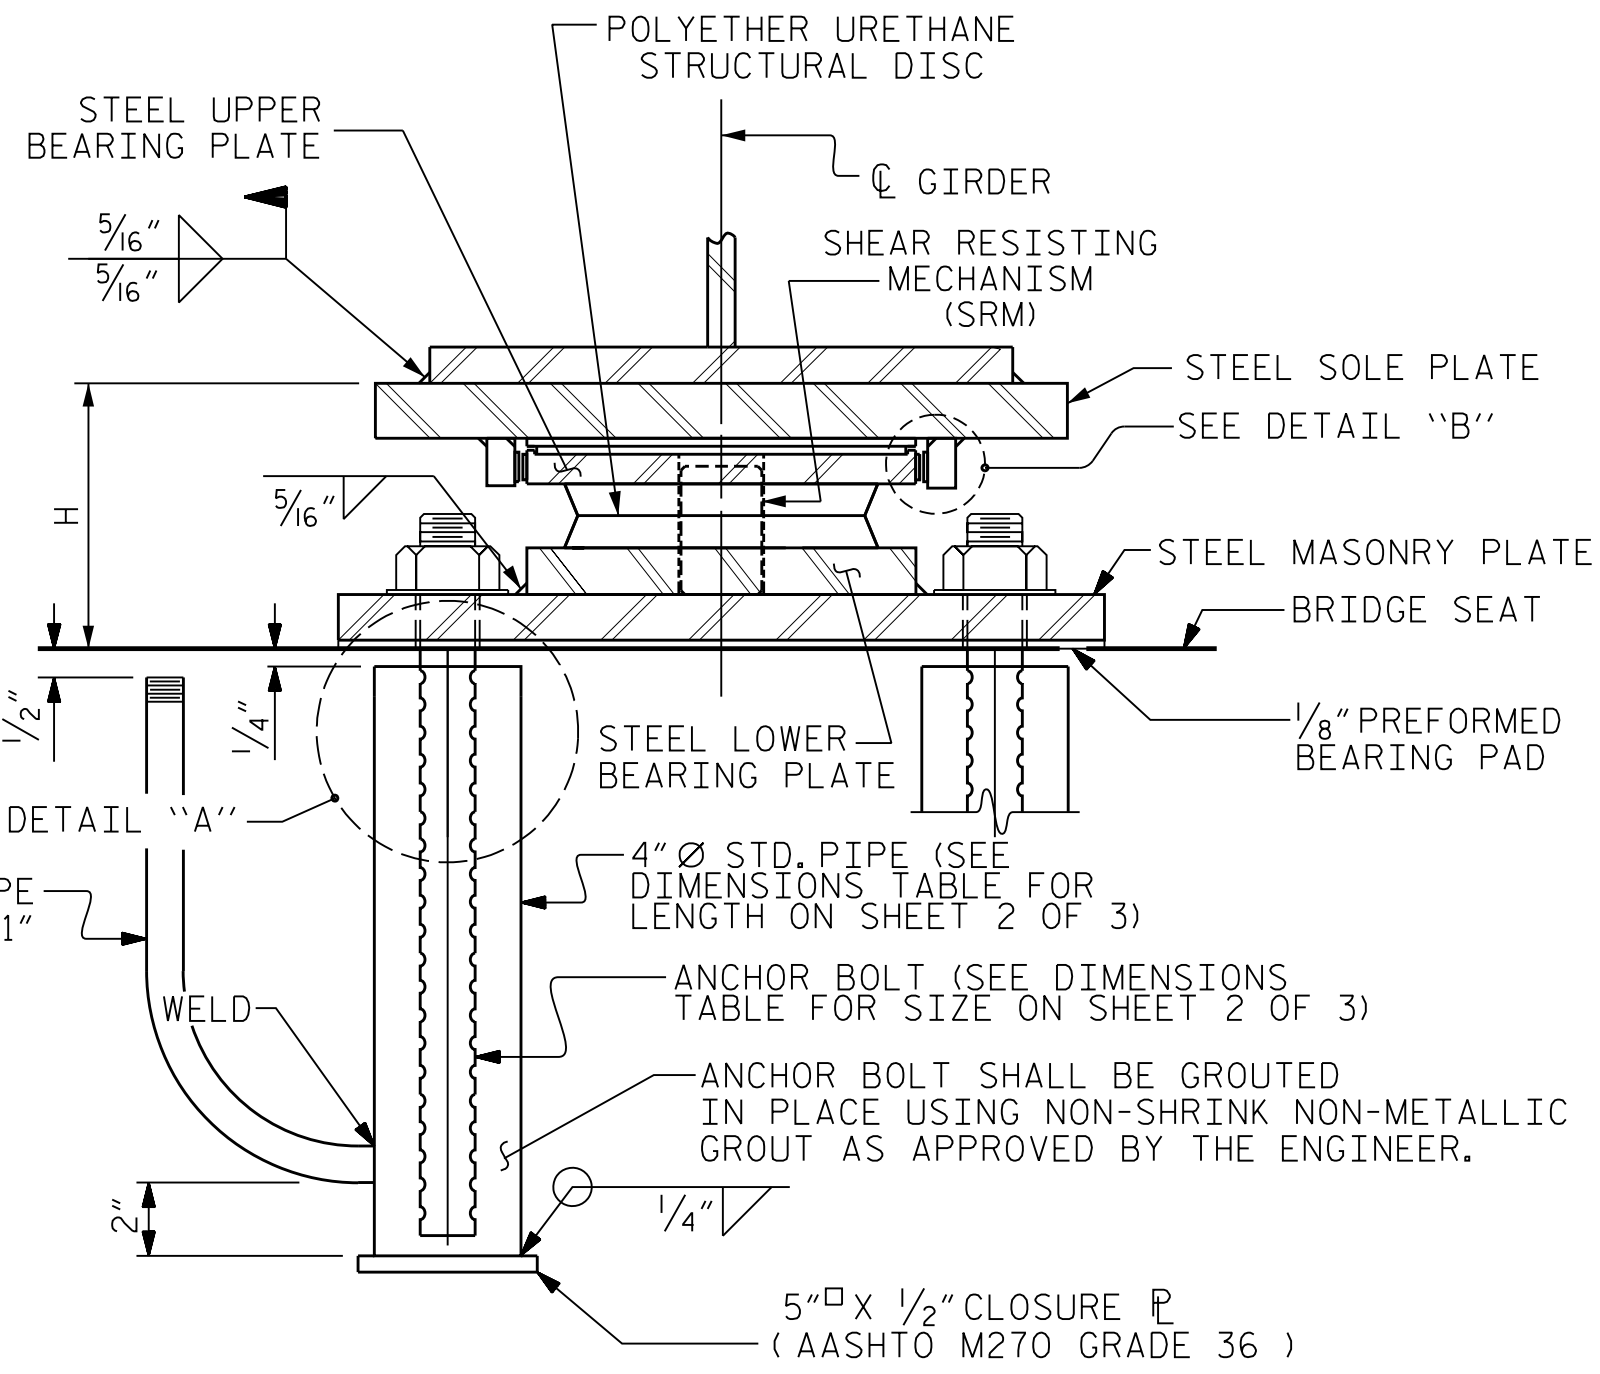


SECTION B-B  
EXPANSION

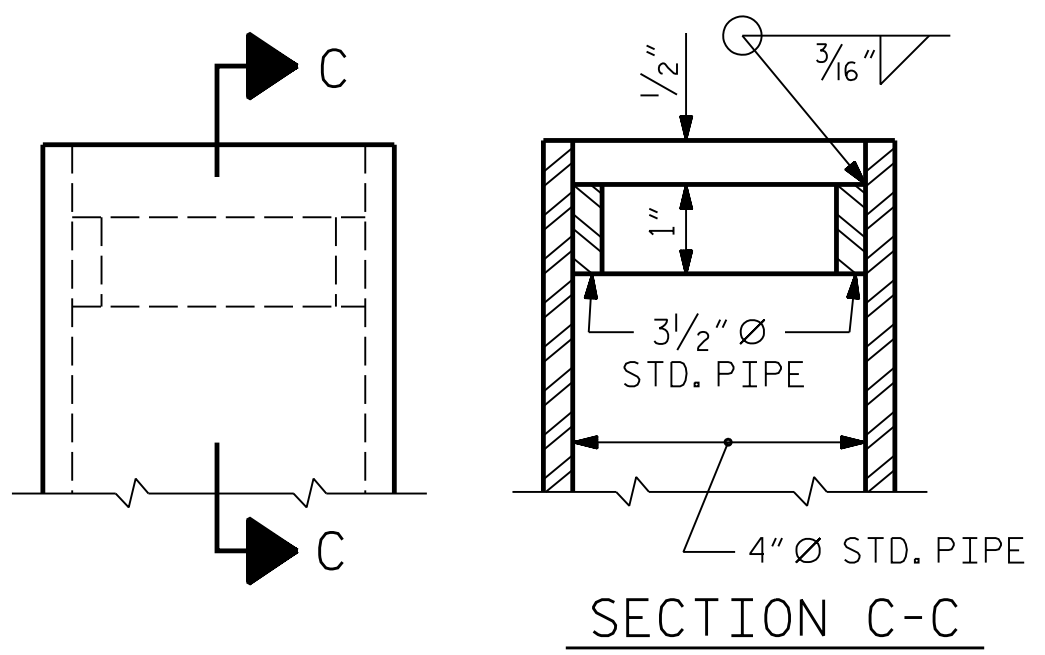


SECTION C-C

LOCATION	TEMPERATURE AT TIME OF SETTING			*
	45° F	60° F	90° F	
END BENT 1	-3/8"	0"	3/4"	-1/4"
BENT 1	-3/16"	0"	3/8"	1/8"
BENT 3	-3/16"	0"	3/8"	0"
BENT 4 BK	-3/8"	0"	3/4"	-1/4"
BENT 4 AHD	-3/8"	0"	11/16"	-3/16"
END BENT 2	-5/16"	0"	5/8"	-5/16"

\* CORRECTION FOR END ROTATION DUE TO WEIGHT OF SLAB AND COMPOSITE DEAD LOAD.

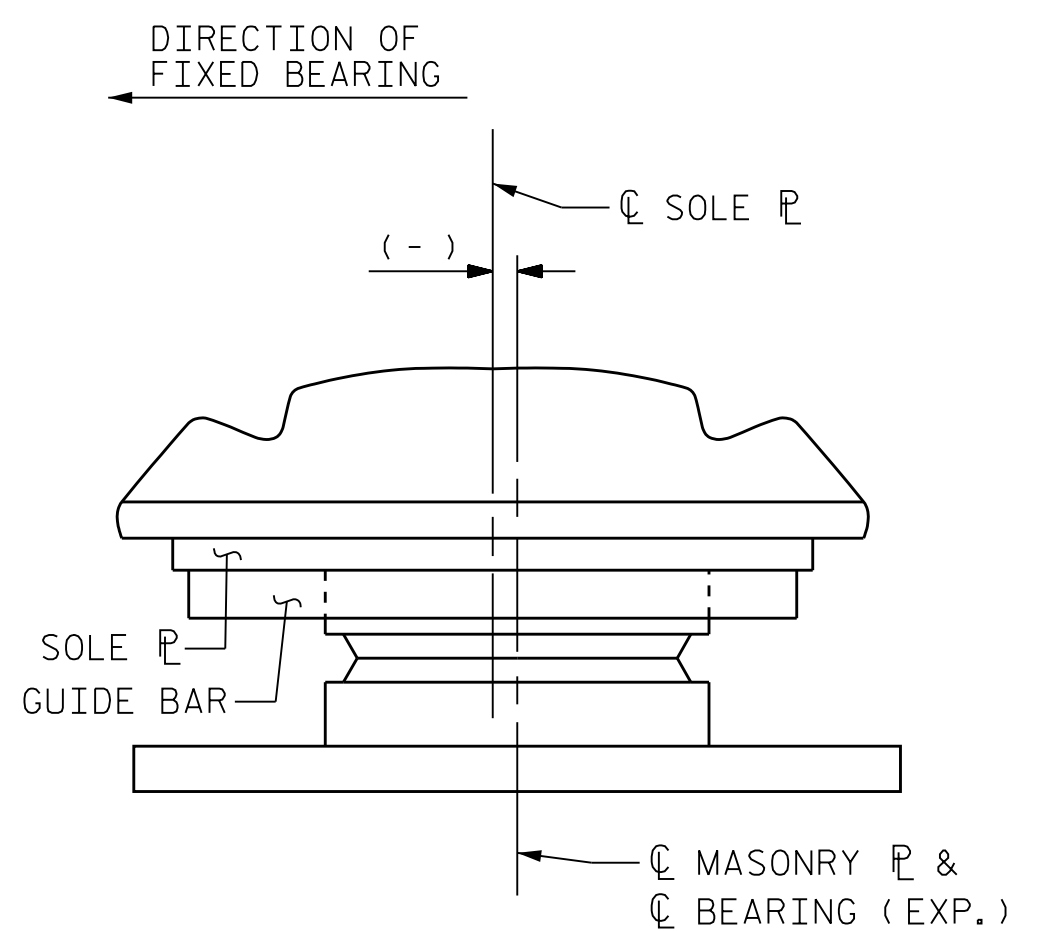

TEMPERATURE SETTING DETAIL

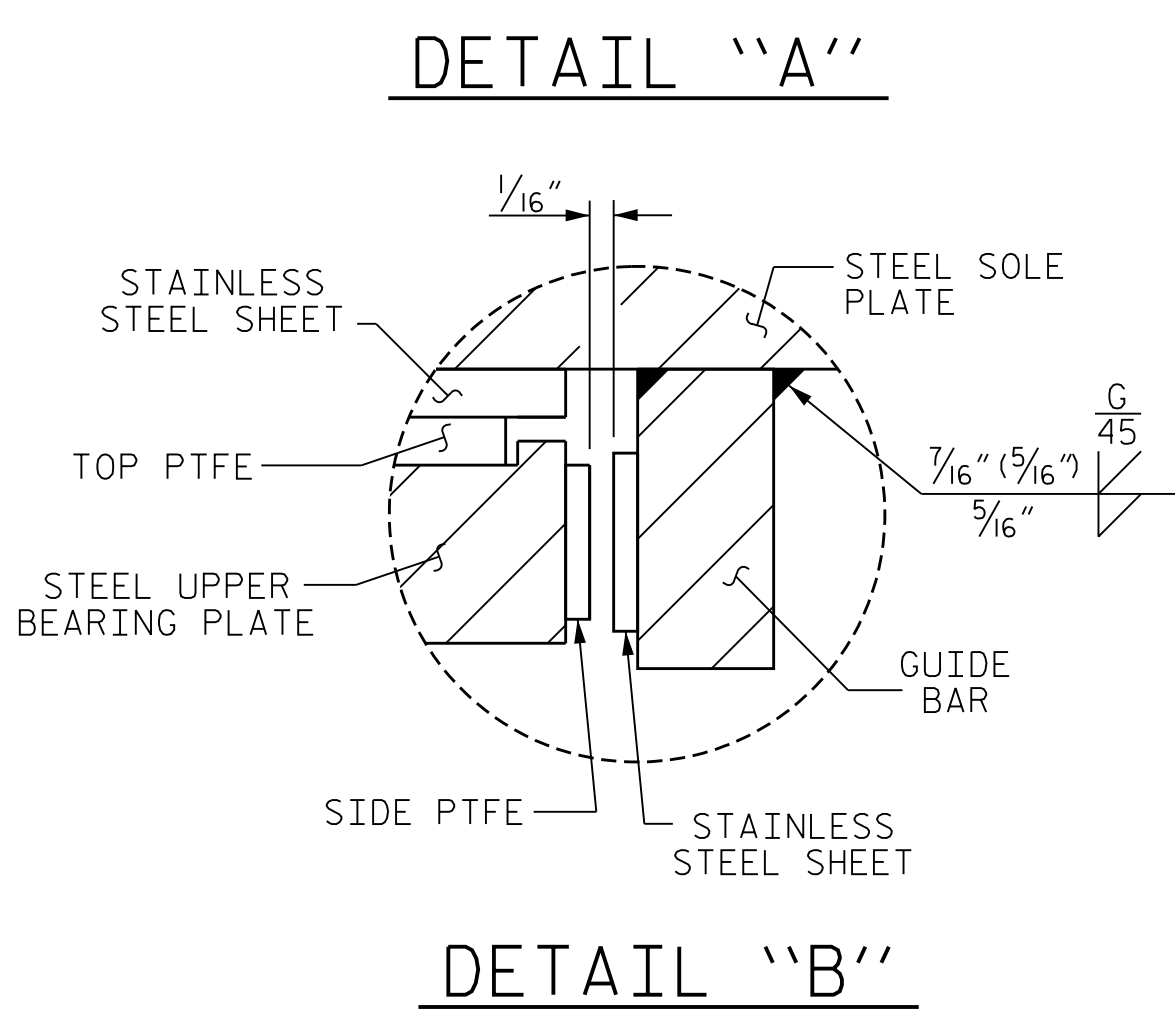

DETAIL "A"

DETAIL "B"

NOTES


- FOR DISC BEARINGS, SEE SPECIAL PROVISIONS.
- ALL BEARING PLATES SHALL BE AASHTO M270 GRADE 50W OR GRADE 50.
- AT ALL POINTS OF SUPPORT, NUTS FOR ANCHOR BOLTS SHALL BE FINGER-TIGHTENED PLUS AN ADDITIONAL 1/4 TURN. THE THREAD OF THE NUT AND BOLT SHALL THEN BE BURRED WITH A SHARP POINTED TOOL.
- WHEN WELDING THE SOLE PLATE TO THE GIRDER, USE TEMPERATURE INDICATING WAX PENS, OR OTHER SUITABLE MEANS, TO ENSURE THAT THE TEMPERATURE OF THE BEARING DOES NOT EXCEED 250°F. TEMPERATURES ABOVE THIS MAY DAMAGE THE TFE OR URETHANE DISC.
- AFTER BEARING ASSEMBLY IS IN PLACE AND ANCHOR BOLTS HAVE BEEN FINALLY POSITIONED, THEY SHALL BE GROUTED IN PLACE AS SHOWN.
- THE CLOSURE PLATE, GROUT PIPE, AND STANDARD PIPE FOR THIS ASSEMBLY NEED NOT BE GALVANIZED.
- SOLE PLATES SHOULD BE WELDED TO GIRDER FLANGES AND ANCHOR BOLTS SHOULD BE GROUTED BEFORE FALSEWORK IS PLACED.
- ALL SURFACES OF BEARING PLATES SHALL BE SMOOTH AND STRAIGHT.
- FOR ATTACHMENT OF THE STAINLESS STEEL SHEETS TO THE STEEL SOLE PLATE AND GUIDE BARS, AS WELL AS THE TOP AND SIDE PTFE SHEETS TO THE STEEL UPPER BEARING PLATE, SEE SPECIAL PROVISIONS.
- FOR THERMAL SPRAYED COATINGS (METALLIZATION), SEE SPECIAL PROVISIONS.
- THE MINIMUM ROTATIONAL CAPACITY FOR ALL BEARINGS SHALL BE 0.02 RADIAN.
- SEE SHEET 2 OF 3 FOR SOLE PLATE DETAILS.
- SEE TABLE ON SHEET 2 OF 3 FOR BEARING AND MASONRY PLATE DESIGNATIONS, LOCATIONS, BEARING HEIGHTS, MASONRY PLATE DIMENSIONS, TOP OF SOLE PLATE SLOPE, LOADS AND MOVEMENTS.
- SEE SHEET 3 OF 3 FOR EXPANSION CHORD SETTING ANGLES.

PROJECT NO. U-2579AB  
 FORSYTH COUNTY  
 STATION: 47+63.62 -Y15FLYBD-

SHEET 1 OF 3

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH


**SUPERSTRUCTURE  
 DISC BEARING  
 DETAILS**

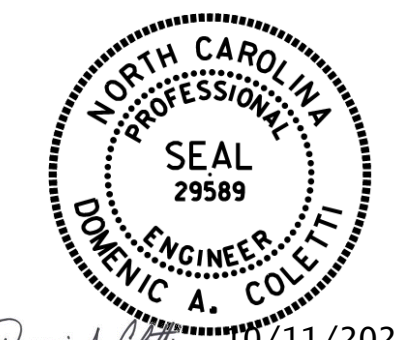

10/11/2021

REVISIONS					
NO.	BY:	DATE:	NO.	BY:	DATE:
1	--	--	3	--	--
2	--	--	4	--	--

SHEET NO. S05-050  
 TOTAL SHEETS 116

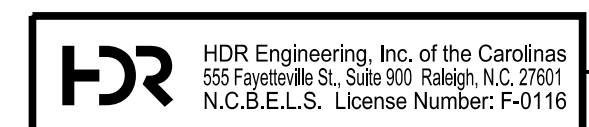

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

PLOT DRIVER: NCDOT.pdf\_color\_eng-50.ppt  
 USER: PPETERSO DATE: 10/17/2021  
 FILE: ... \SUPERS

DES BY: S. NIFONG DATE: 07/19  
 DES CHK: D. COLETTI DATE: 07/19  
 DWG BY: B. PETERSON DATE: 07/19  
 CHK BY: G. SCHMITZ DATE: 11/19