



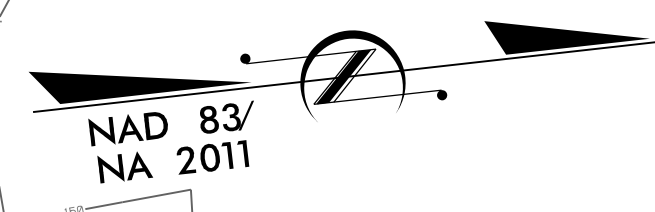

-L- CURVE DATA

PI Sta 62+27.11	PI Sta 85+35.62
$\Delta = 13^{\circ} 43' 19.0''$ (LT)	$\Delta = 28^{\circ} 56' 41.9''$ (RT)
D = 0' 47' 36.9"	D = 3' 19' 52.1"
L = 1,729.14'	L = 868.92'
T = 868.73'	T = 443.94'
R = 7,220.00'	R = 1,720.00'
SE = NC	SE = 035
	RO = 126

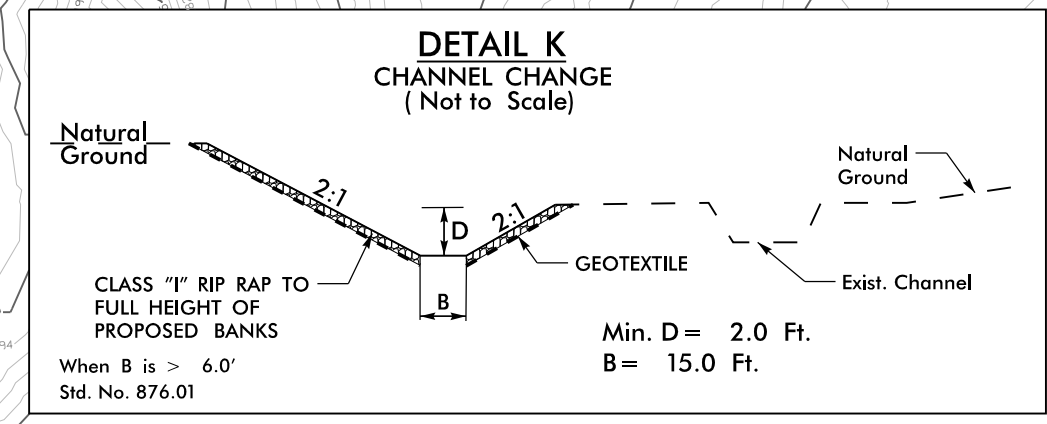

MATCHLINE SHEET 5 -L- STA. 69 + 35.00

MATCHLINE SHEET 7 -L- STA. 82 + 60.00

6  
M. D. GILLIS C/O  
JUDY GILLIS DIBACCO  
DB 2584 PG 0783

8  
MALCOLM D. GILLIS HEIRS  
JUDY GILLIS MCKETHAN  
DB 451 PG 548



9  
JOHN MCN GILLIS JR ET AL  
DB 2899 PG 463

7  
M. D. GILLIS C/O  
JUDY GILLIS DIBACCO  
DB 2584 PG 0783

5  
JOHN D. GILLIS  
DB 5280 PG 386  
PB 81 PG 32

10  
JOHN MCN GILLIS JR ET AL  
DB 2899 PG 463

11  
DOUGLAS KEITH MILLER & WIFE  
KATHRYN GILLIS  
DB 4227 PG 487

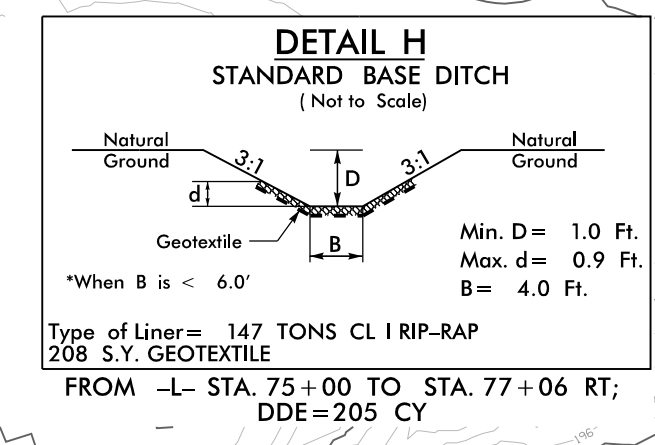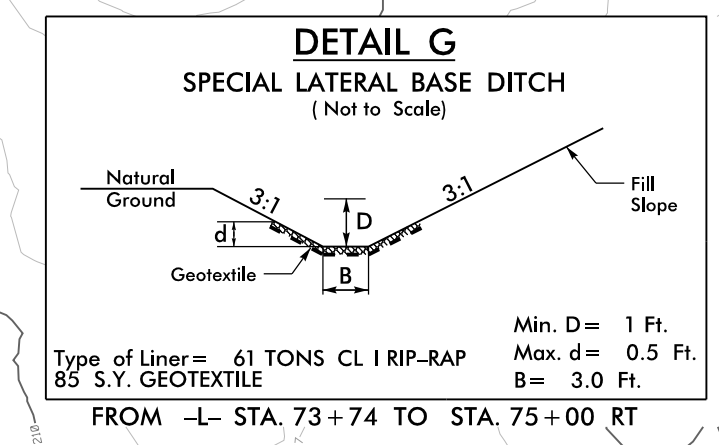

CHANNEL RELOCATION EXCAVATION SHALL BE PERFORMED IN ONLY DRY OR ISOLATED AREAS OF THE WORK ZONE. UTILIZE IMPERVIOUS DIKES, PUMPS, AND HOSES TO ISOLATE WORK FROM STREAM FLOW WHEN NECESSARY. INSTALL RIP RAP AROUND PROPOSED COLUMNS AND CONSTRUCT CHANNEL BLOCK.

NOTE: CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 6

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

NOTE: UTILIZE TEMPORARY SEDIMENT BASIN OR SPECIAL STILLING BASIN(S) AS STILLING BASIN WHERE APPLICABLE.

NOTES: ANY DEVIATION FROM OPTIONS GIVEN WILL REQUIRE PRIOR APPROVAL BY ENGINEER.

ADDITIONAL EROSION CONTROL DEVICES MAY NEED TO BE INSTALLED AS DIRECTED BY THE ENGINEER.

02-FEB-2022 08:20 R:\Environmental\Design\Plan\_Sheets\U-5798A\_psh\_EC-6.dgn