




PROJECT REFERENCE NO.	SHEET NO.
2022CPT.09.05.10341 2022CPT.09.06.20341	9

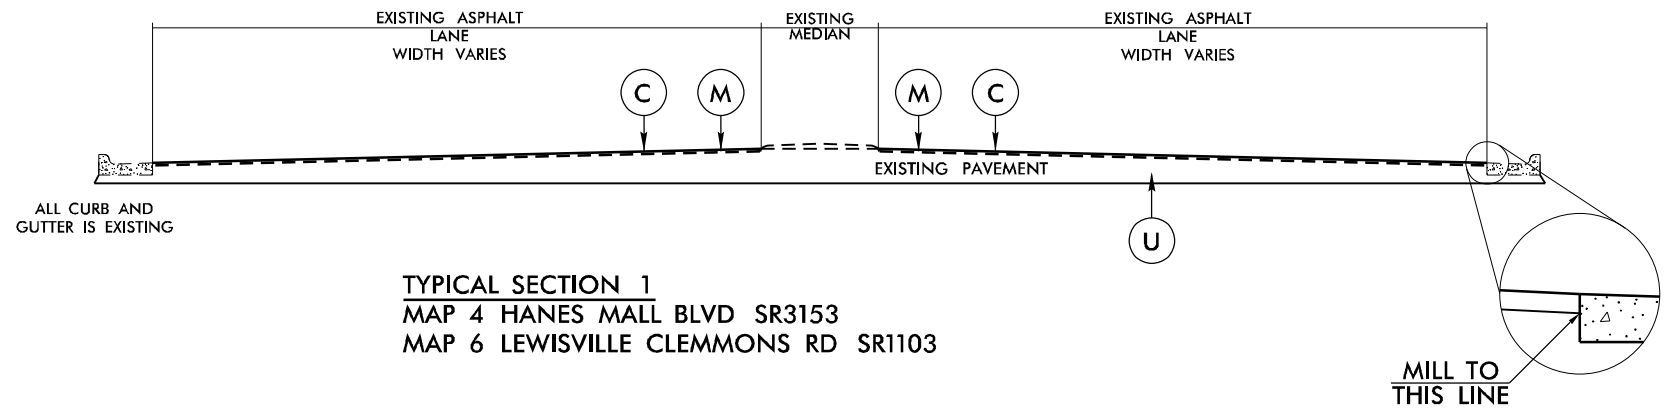

**TYPICAL SECTION 1**  
 MAP 4 HANES MALL BLVD SR3153  
 MAP 6 LEWISVILLE CLEMMONS RD SR1103

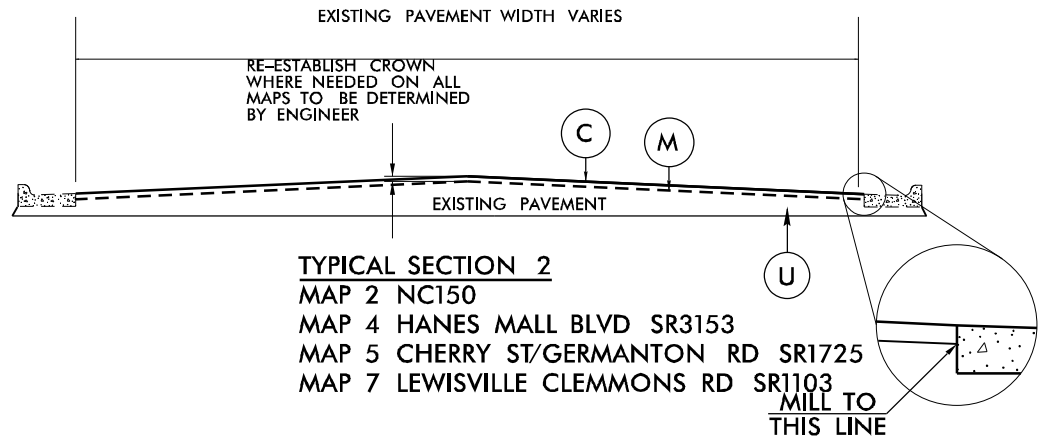

**TYPICAL SECTION 2**  
 MAP 2 NC150  
 MAP 4 HANES MALL BLVD SR3153  
 MAP 5 CHERRY ST/GERMANTON RD SR1725  
 MAP 7 LEWISVILLE CLEMMONS RD SR1103

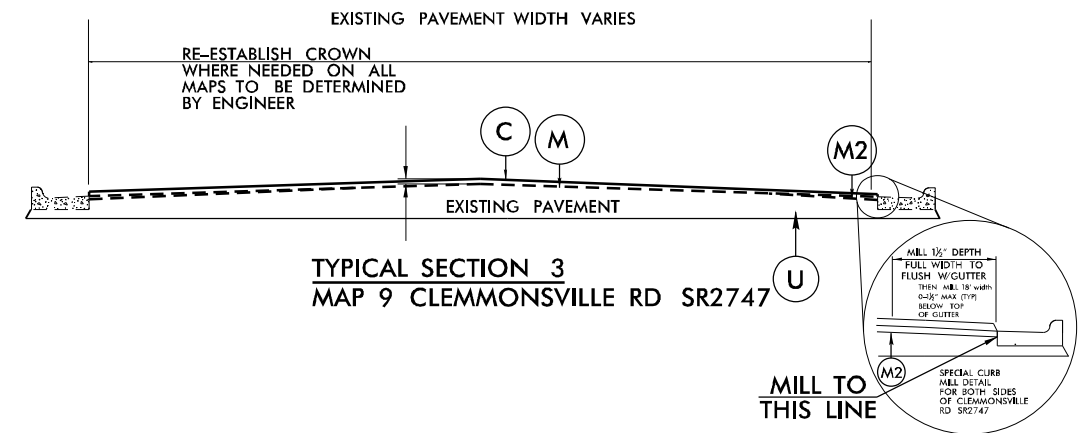

**TYPICAL SECTION 3**  
 MAP 9 CLEMMONSVILLE RD SR2747

PAVEMENT SCHEDULE	
C	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, TO BE APPLIED AT AN AVERAGE RATE OF 168 LBS PER SQ. YD.
C1	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, TO BE APPLIED AT AN AVERAGE RATE OF 165 LBS PER SQ. YD.
C2	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, TO BE APPLIED AT AN AVERAGE RATE OF 224 LBS PER SQ. YD.
D	PROP. APPROX. 4" ASPHALT CONCRETE SURFACE COURSE, TYPE I19.0C, TO BE APPLIED AT AN AVERAGE RATE OF 456 LBS PER SQ. YD.
M	MILL ASPHALT PAVEMENT, 1 1/2" DEPTH ENTIRE WIDTH
M1	MILL ASPHALT PAVEMENT, 6" DEPTH ENTIRE WIDTH
M2	MILL ASPHALT PAVEMENT, 1 1/2" TO 0" DEPTH @ 18' WIDTH
S	SHOULDER RECONSTRUCTION (SEE DETAIL)
U	EXISTING PAVEMENT