PROJECT REFERENCE NO.	SHEET NO.
I-5943	SIGN-3

APPROVED: DocuSigned by: Ayman Alqudwah F32AC5CAF965472...

DATE: 11/10/2021

SEAL

NORTH CAROLINA PROFESSIONAL SEAL 028387 ENGINEER AYMAN I. ALQUDWAH

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

SIGN NUMBER: 201
TYPE: A
QUANTITY: 1
SIGN WIDTH: 8'-0"
HEIGHT: 5'-0"
TOTAL AREA: 40.0 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADII: 6"
NO. Z BARS: 2
LENGTH: 88.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
AR_Type A	67	8.5	18.6	29.3

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: DHB
PROJECT ID: I-5943
CHECKED BY: AIA
LOCATION:
Oct 07, 2021
DIV: 5

USE NOTES:

1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032" (0.8mm) aluminum and demountable.

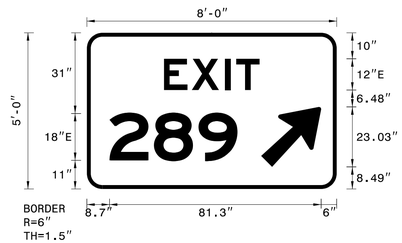

Spacing Factor is 1 unless specified otherwise
Spacing Factor for EXIT is 2.25

LETTER POSITIONS

Letter spacings are to start of next letter

																												Series/Size Text Length
		E	X	I	T																							E 2000
	29.6	10.7	12.8	4.2	9	29.6																						36.7
		2	8	9	2	8	9		2	8	9	2	8	9														E 2000
	8.7	17.1	17.1	-33.8	17.1	17.1	14.6	-49.2	17.1	17.1	-33.8	17.1	17.1	14.6	38.1													49.2
		2	8	9	2	8	9		2	8	9	2	8	9														E 2000
	8.7	17.1	17.1	-33.8	17.1	17.1	14.6	-49.2	17.1	17.1	-33.8	17.1	17.1	14.6	38.1													49.2

FILENAME: Guidsign_I-40-Crossroads

NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER: 202,203
TYPE: A
QUANTITY: 2
SIGN WIDTH: 8'-0"
HEIGHT: 5'-0"
TOTAL AREA: 40.0 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADII: 6"
NO. Z BARS: 2
LENGTH: 88.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
AR_Type A	67	8.5	18.6	29.3

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: DHB
PROJECT ID: I-5943
CHECKED BY: AIA
LOCATION:
Oct 07, 2021
DIV: 5

USE NOTES:

1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032" (0.8mm) aluminum and demountable.

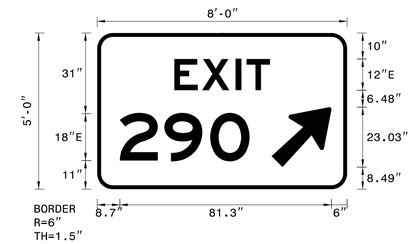

Spacing Factor is 1 unless specified otherwise
Spacing Factor for EXIT is 2.25

LETTER POSITIONS

Letter spacings are to start of next letter

																												Series/Size Text Length
		E	X	I	T																							E 2000
	29.6	10.7	12.8	4.2	9	29.6																						36.7
		2	9	0																								E 2000
	8.7	17.1	17.6	15.1	37.5																							49.9

FILENAME: Guidsign_I-40-Crossroads

NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER: 204,205B
TYPE: A
QUANTITY: 2
SIGN WIDTH: 8'-0"
HEIGHT: 5'-0"
TOTAL AREA: 40.0 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADII: 6"
NO. Z BARS: 2
LENGTH: 88.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
AR_Type A	67	8.5	18.6	29.3

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: DHB
PROJECT ID: I-5943
CHECKED BY: AIA
LOCATION:
Oct 07, 2021
DIV: 5

USE NOTES:

1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032" (0.8mm) aluminum and demountable.

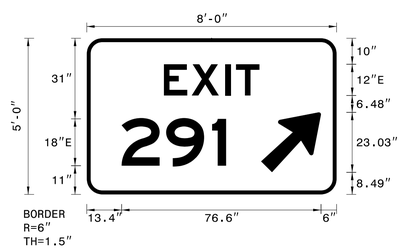

Spacing Factor is 1 unless specified otherwise
Spacing Factor for EXIT is 2.25

LETTER POSITIONS

Letter spacings are to start of next letter

																												Series/Size Text Length
		E	X	I	T																							E 2000
	29.6	10.7	12.8	4.2	9	29.6																						36.7
		2	9	1																								E 2000
	13.4	17.1	17.6	5.4	42.4																							40.1

FILENAME: Guidsign_I-40-Crossroads

NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN NUMBER: 206
TYPE: A
QUANTITY: 1
SIGN WIDTH: 8'-0"
HEIGHT: 5'-0"
TOTAL AREA: 40.0 Sq.Ft.
BORDER TYPE: FLUSH
RECESS: 0"
WIDTH: 1.5"
RADII: 6"
NO. Z BARS: 2
LENGTH: 88.0

BACKG COLOR: Green
COPY COLOR: White

SYMBOL	X	Y	WID	HT
AR_Type A	67	8.5	18.6	29.3

MAT'L: 0.125" (3.2 mm) ALUMINUM

DESIGN BY: DHB
PROJECT ID: I-5943
CHECKED BY: AIA
LOCATION:
Oct 07, 2021
DIV: 5

USE NOTES:

1. Legend and border(except those that are colored black) shall be direct applied Grade C sheeting.
2. Background shall be Grade C reflective sheeting.
3. Shields; A, B, and C type arrows shall be on 0.032" (0.8mm) aluminum and demountable.

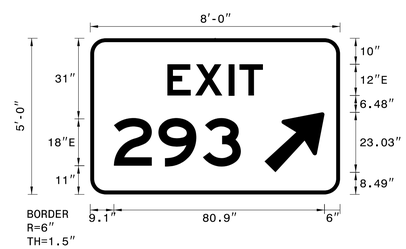

Spacing Factor is 1 unless specified otherwise
Spacing Factor for EXIT is 2.25

LETTER POSITIONS

Letter spacings are to start of next letter

																												Series/Size Text Length
		E	X	I	T																							E 2000
	29.6	10.7	12.8	4.2	9	29.6																						36.7
		2	9	3																								E 2000
	9.1	17.1	17.1	14.6	38.1																							48.8

FILENAME: Guidsign_I-40-Crossroads

NORTH CAROLINA D.O.T. SIGN DETAIL

SIGN DESIGNS

11/10/21
S:\S&DU\Eastern\Derrick\I-5943-SIGN-3.dgn
jsergent