


6/22/99
 p:\aecom-na-pw-bentley.com\AECOM_DS21.NA.2020\Documents\60592827\NCDOT_SMU_B-5717\900-CAD_01S\910.CAD\70.NCDDOT_TIP\Roadway\Pro\B5717_rdy_tup.dgn


PAVEMENT SCHEDULE FINAL PAVEMENT DESIGN	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YARD PER 1" DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 1.5" IN DEPTH.
D1	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YARD PER 1" DEPTH, TO BE PLACED IN LAYERS NOT TO EXCEED 4" IN DEPTH.
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YARD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YARD PER 1" DEPTH, TO BE PLACED IN LAYERS NOT GREATER THAN 5.5" IN DEPTH OR LESS THAN 3" IN DEPTH.
J	8" AGGREGATE BASE COURSE.
P	PRIME COAT AT THE RATE OF .35 GAL. PER SQ. YARD.
R1	2'-6" CONCRETE CURB AND GUTTER.
R2	1'-6" CONCRETE CURB AND GUTTER.
S	4" CONCRETE SIDEWALK.
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
V	INCIDENTAL MILLING (VARIABLE DEPTH 0" TO 1.5" DEPTH)
W1	VARIABLE DEPTH ASPHALT PAVEMENT (SEE DETAIL SHOWING METHOD OF WEDGING NO. 1).

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE

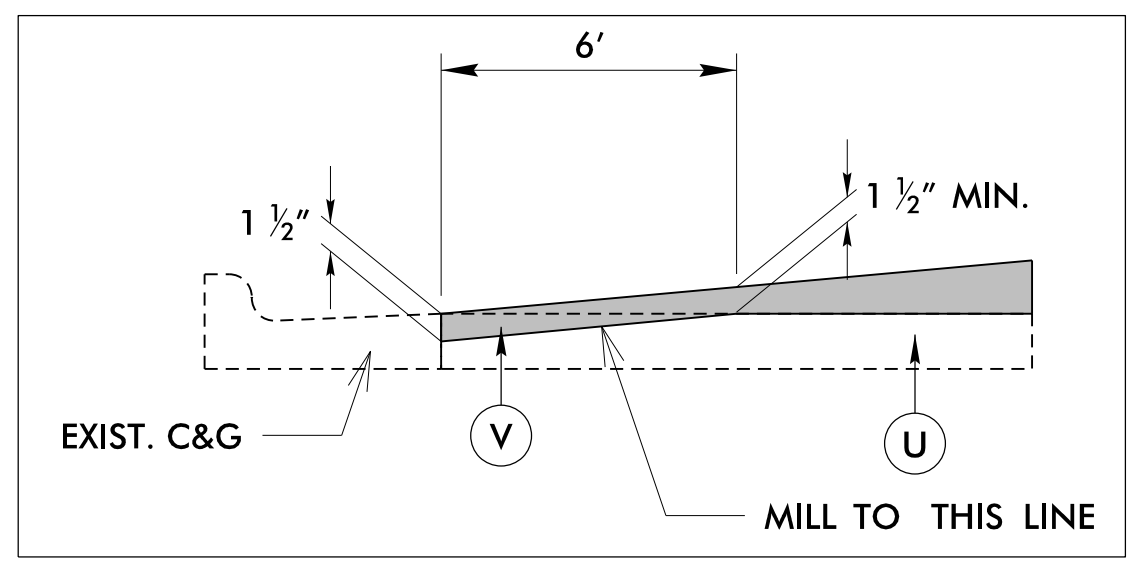


-L- STA. 12+25.00 TO 12+75.80 (LT)

INCIDENTAL MILLING

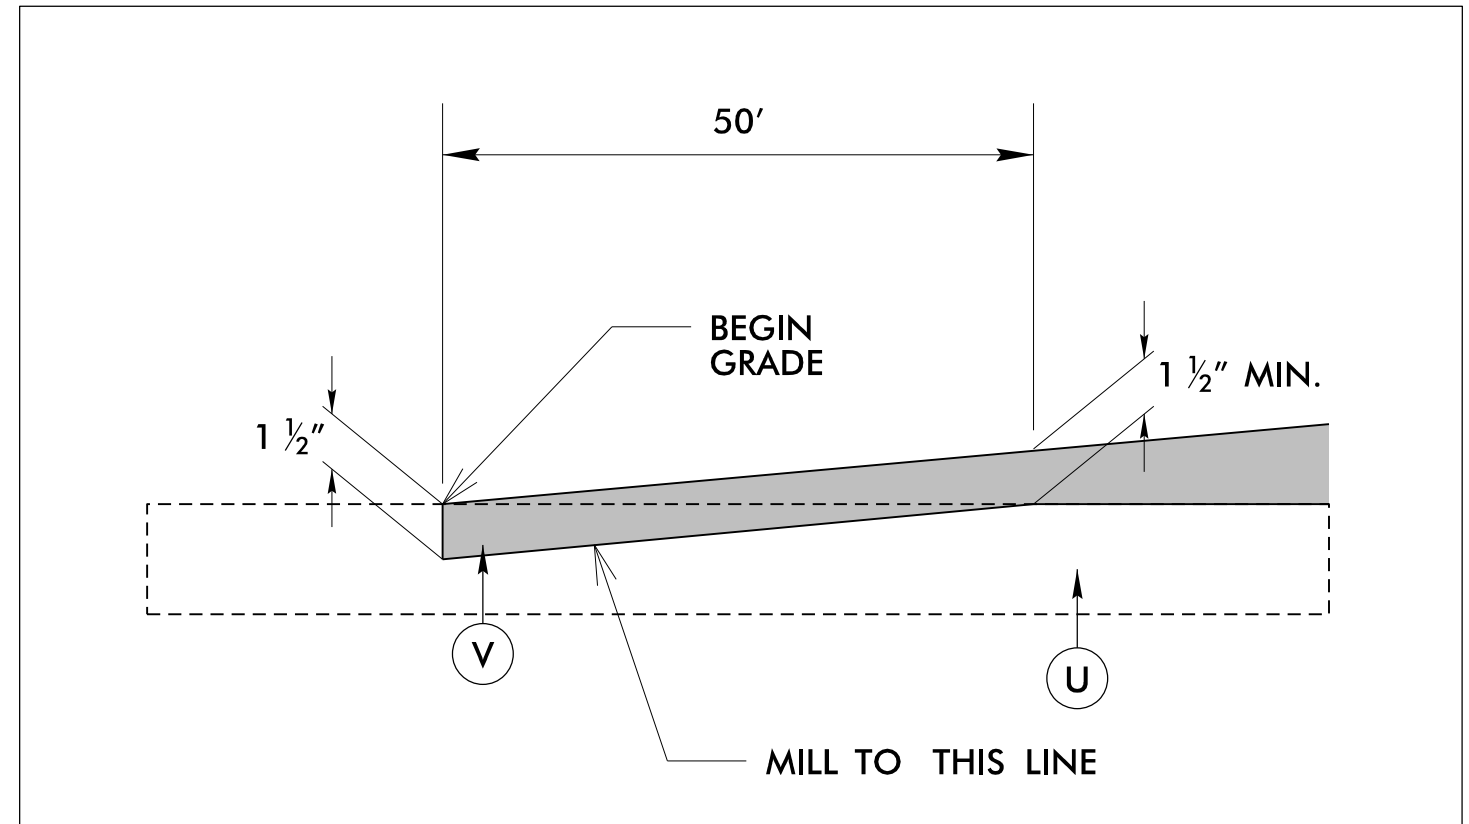


DETAIL SHOWING INCIDENTAL MILLING

-L- STA. 11+00.00 TO 11+50.00 (RT)
 -L- STA. 12+25.00 TO 12+75.00 (LT)
 -L- STA. 27+60.00 TO 28+10.00
 -Y1- STA. 12+50.00 TO 13+00.00

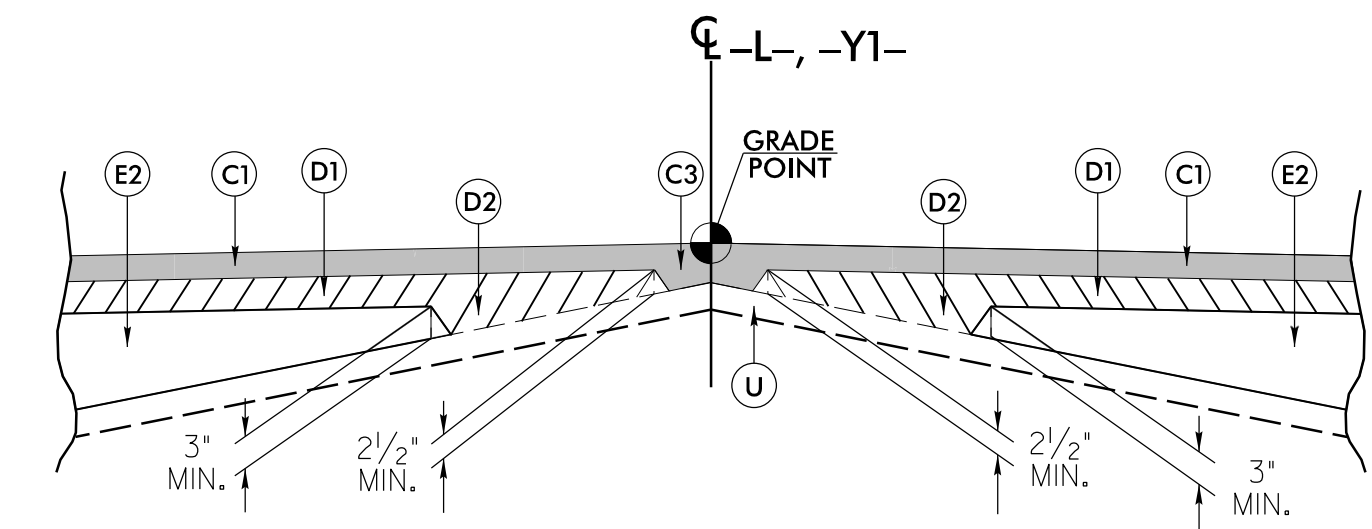

W1: Detail Showing Method of Wedging

USE THIS DETAIL IN CONJUNCTION WITH TYPICAL SECTION NO. 5 & 9

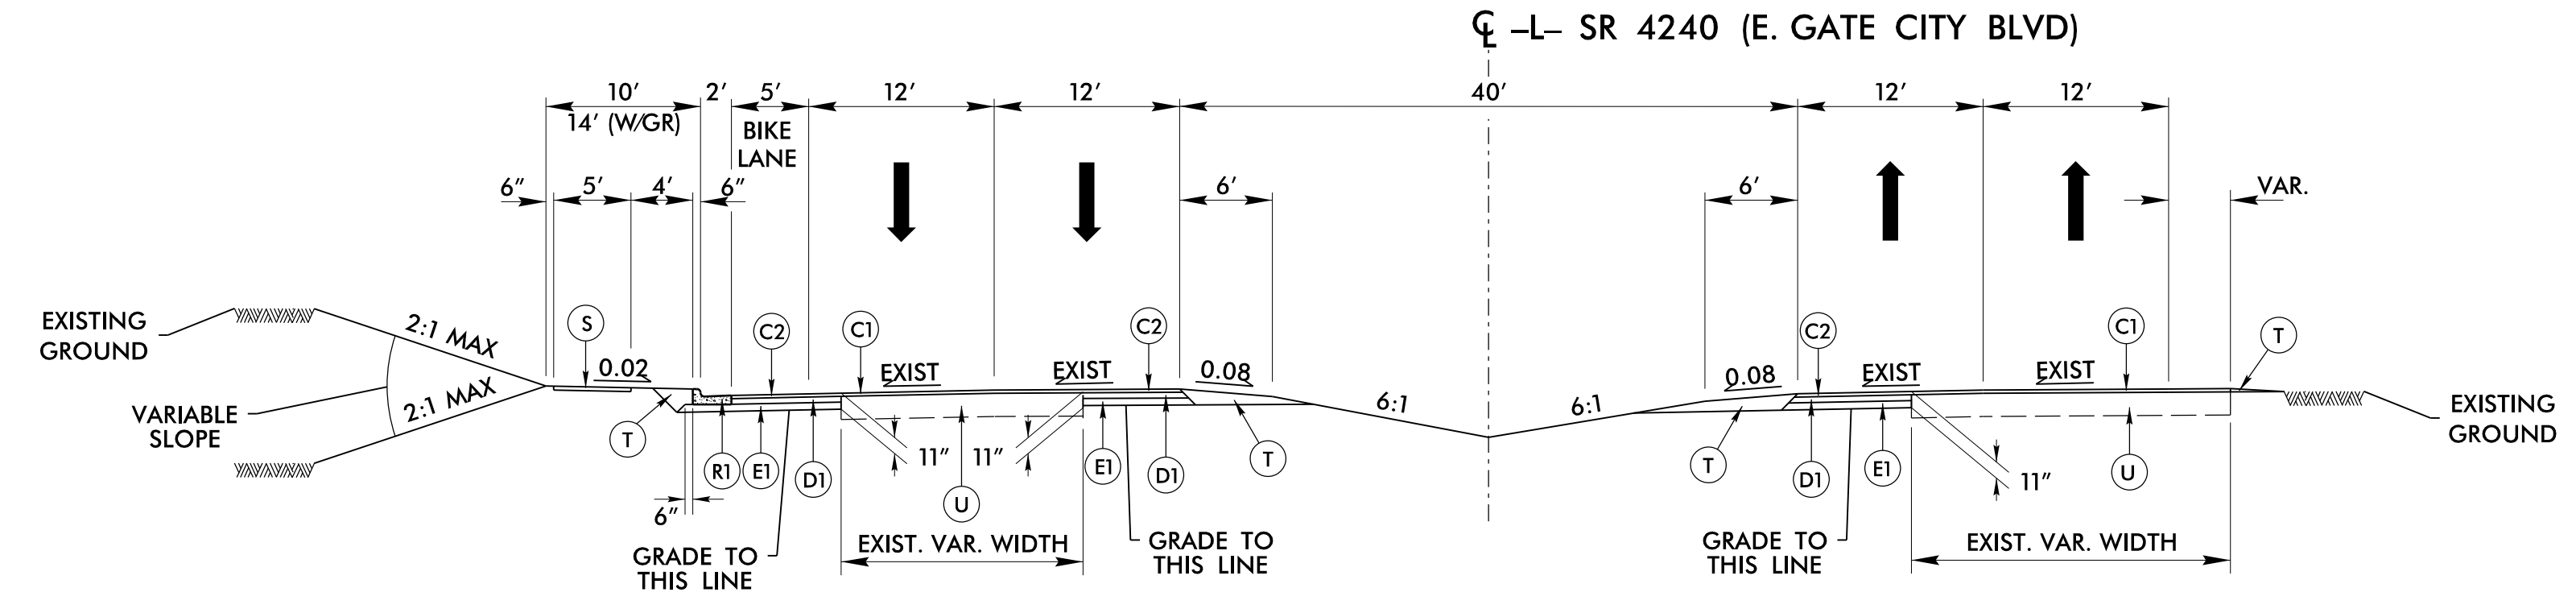

TYPICAL SECTION NO. 1

USE TYPICAL SECTION NO. 1
 -L- STA. 11+00.00 TO 14+98.38

NOTES:
 SEE DETAIL SHOWING EDGE MILLING
 SEE PLANS FOR TURN LANES AND TAPERS
 MILL AS NEEDED

PROJECT REFERENCE NO. B-5717	SHEET NO. 2A-1
ROADWAY DESIGN ENGINEER SEAL 046210 MOTHY A. KOTL	PAVEMENT DESIGN ENGINEER SEAL 022896 S. MORRISON
Prepared in the Office of: AECOM	
NC FIRM LICENSE No: F-0342 5438 Wade Park Road, Raleigh, NC 27607 (919) 461-1000	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	