
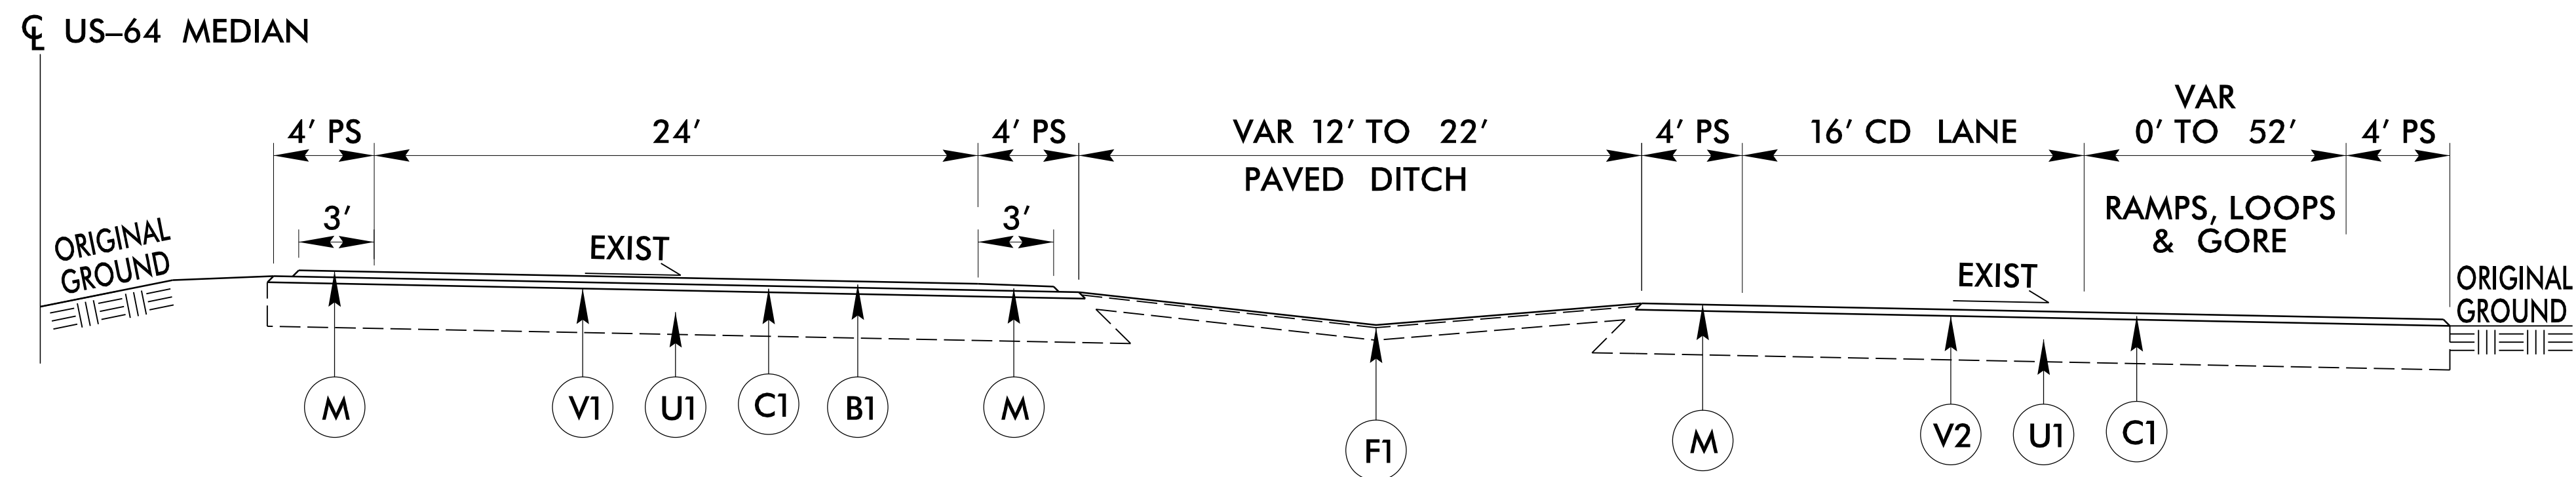
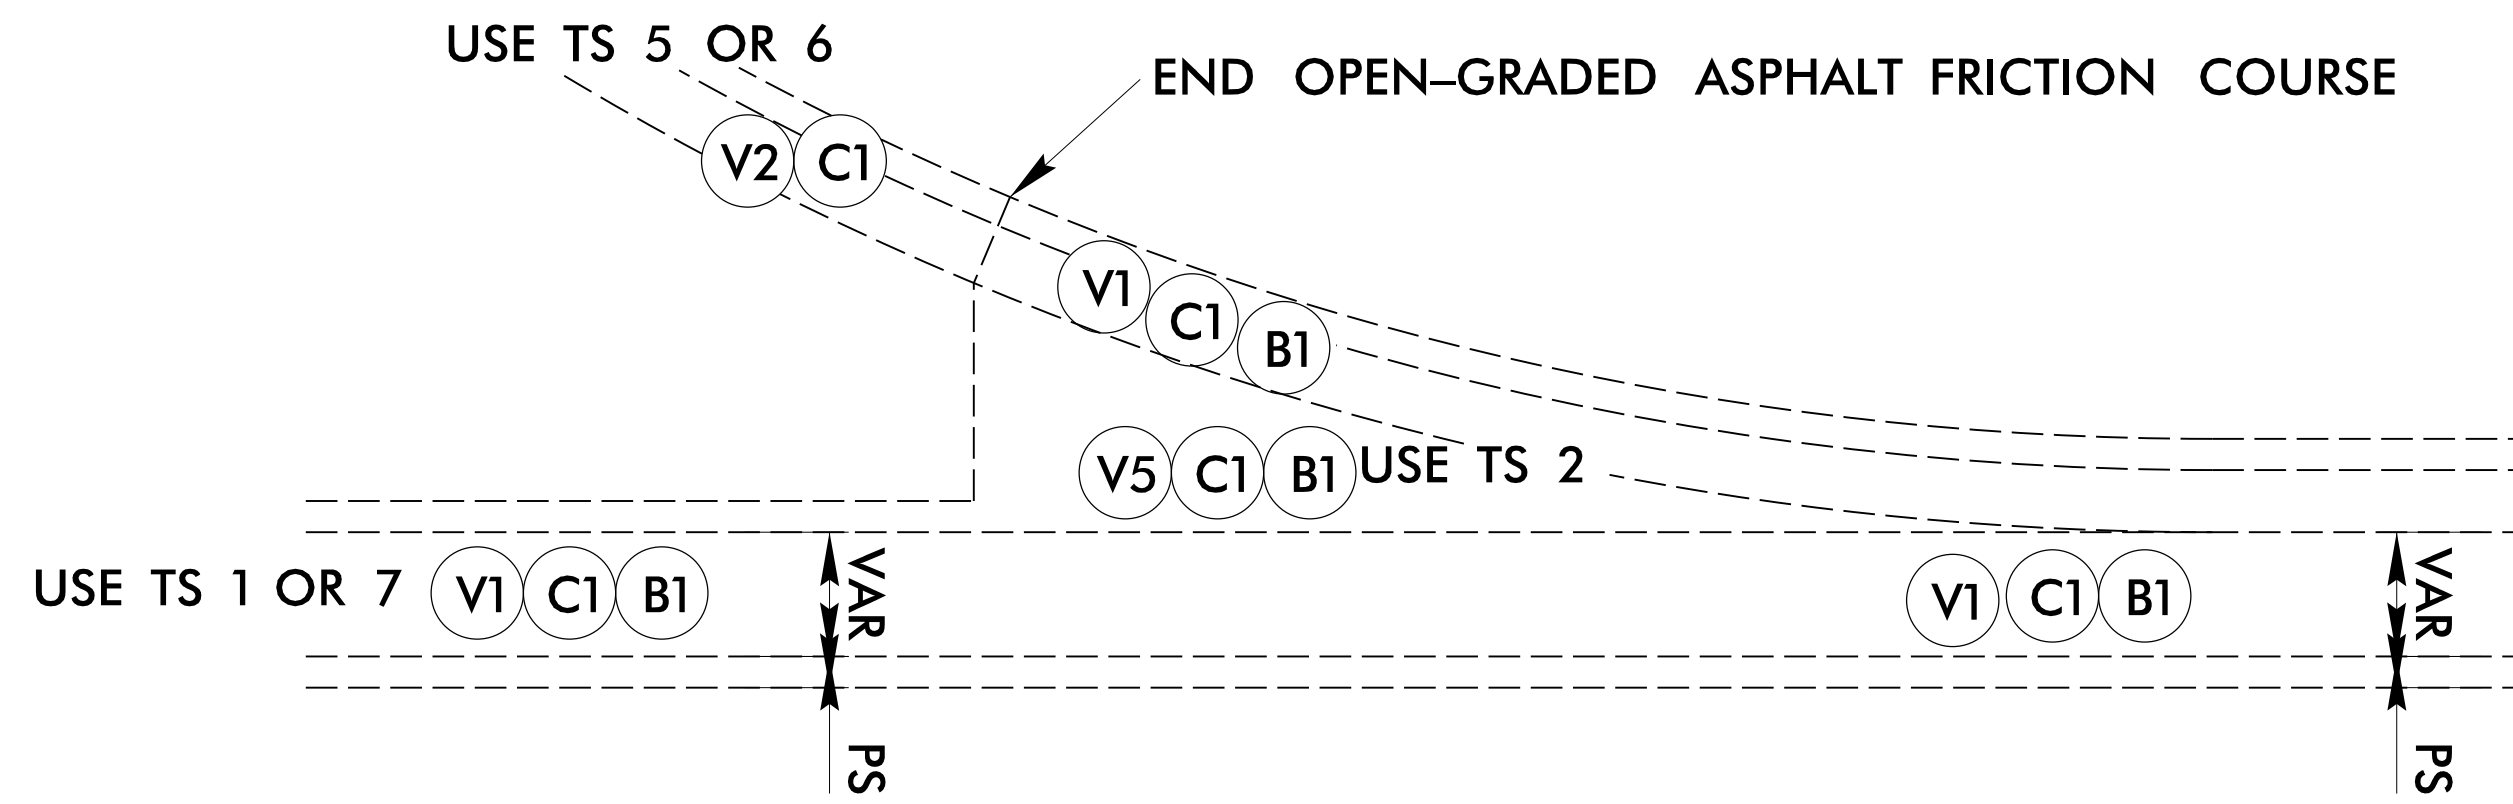
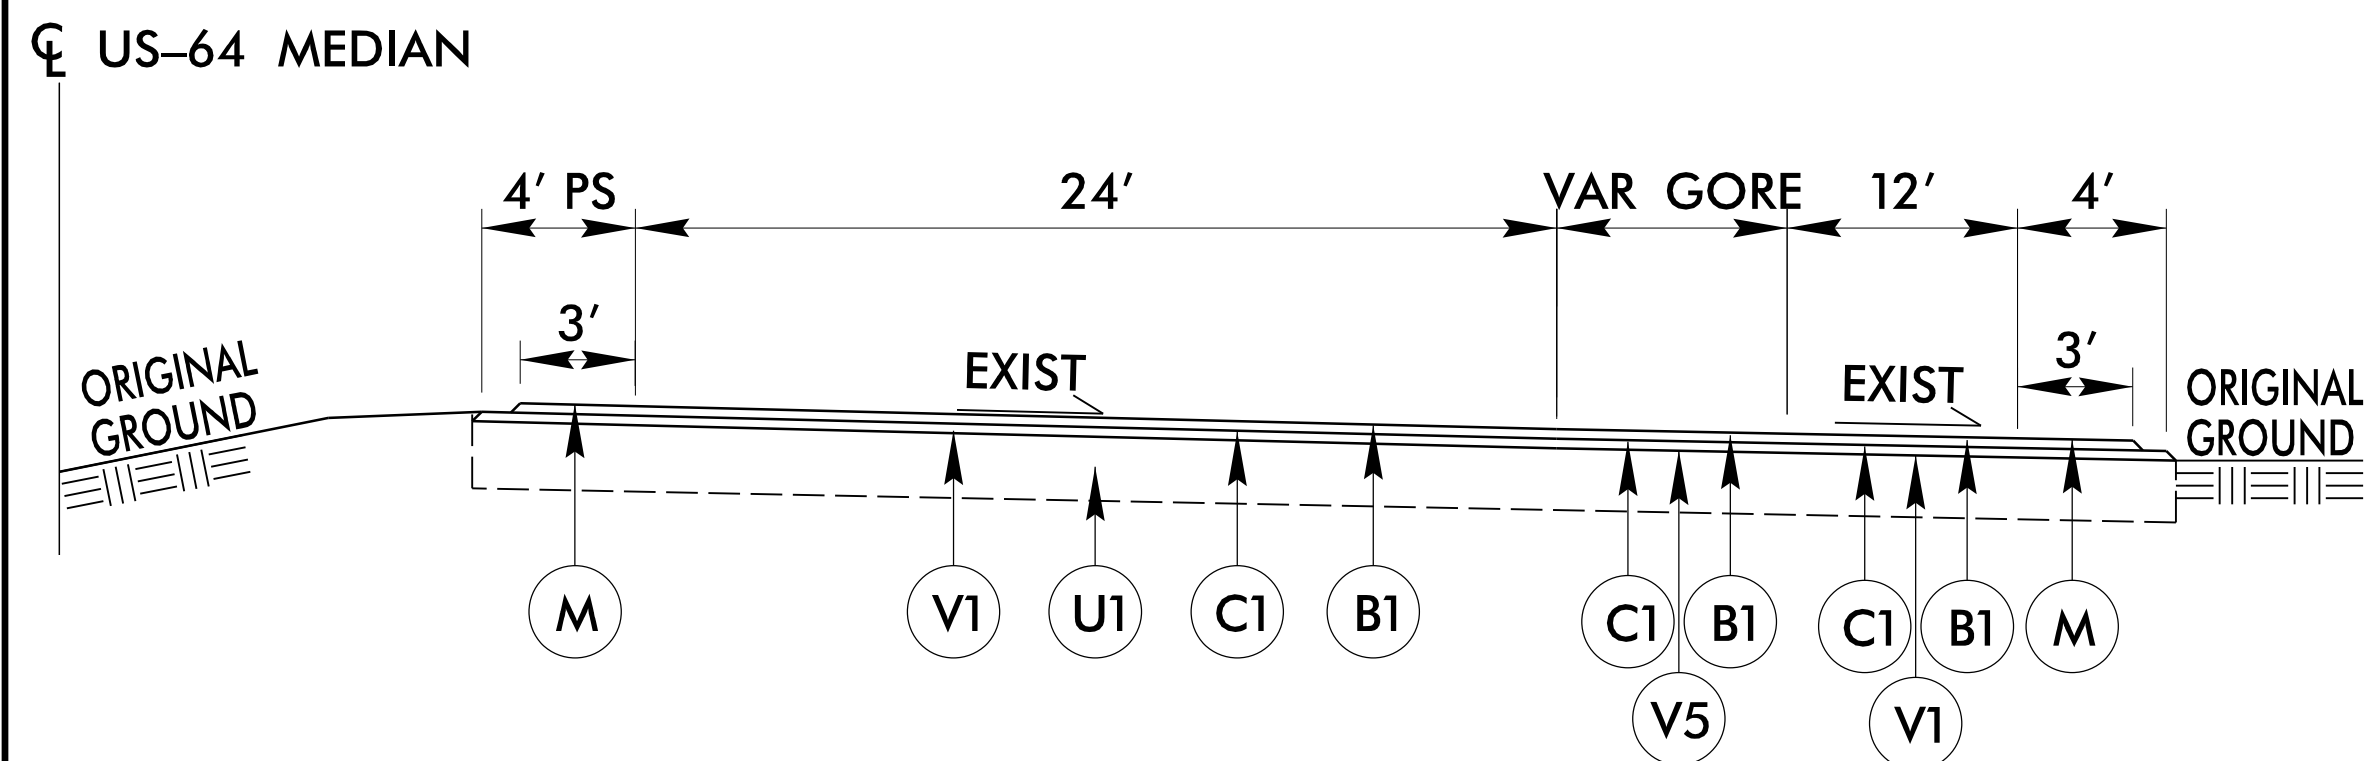


PAVEMENT SCHEDULE

B1	PROP. OPEN-GRADED ASPHALT FRICTION COURSE, TYPE FC-1 MOD, AT AN AVERAGE RATE OF 90 LBS. PER SQ. YARD.	F1	ASPHALT SURFACE TREATMENT, FOG SEAL	V2	MILLING ASPHALT PAVEMENT. 1.5" DEPTH.
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD.	T	EARTH MATERIAL.	V3	VARIABLE DEPTH MILLING ASPHALT PAVEMENT 2.25" - 6.00" DEPTH.
D1	PROP. APPROX. 2.5" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YARD.	U1	EXISTING PAVEMENT.	V4	VARIABLE DEPTH MILLING ASPHALT PAVEMENT 1.50" - 5.25" DEPTH.
E1	PROP. APPROX. 5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 570 LBS. PER SQ. YARD.	V1	MILLING ASPHALT PAVEMENT. 2.25" DEPTH.	V5	INCIDENTAL MILLING
		M	MILLED RUMBLE STRIPS (ASPHALT CONCRETE)		

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

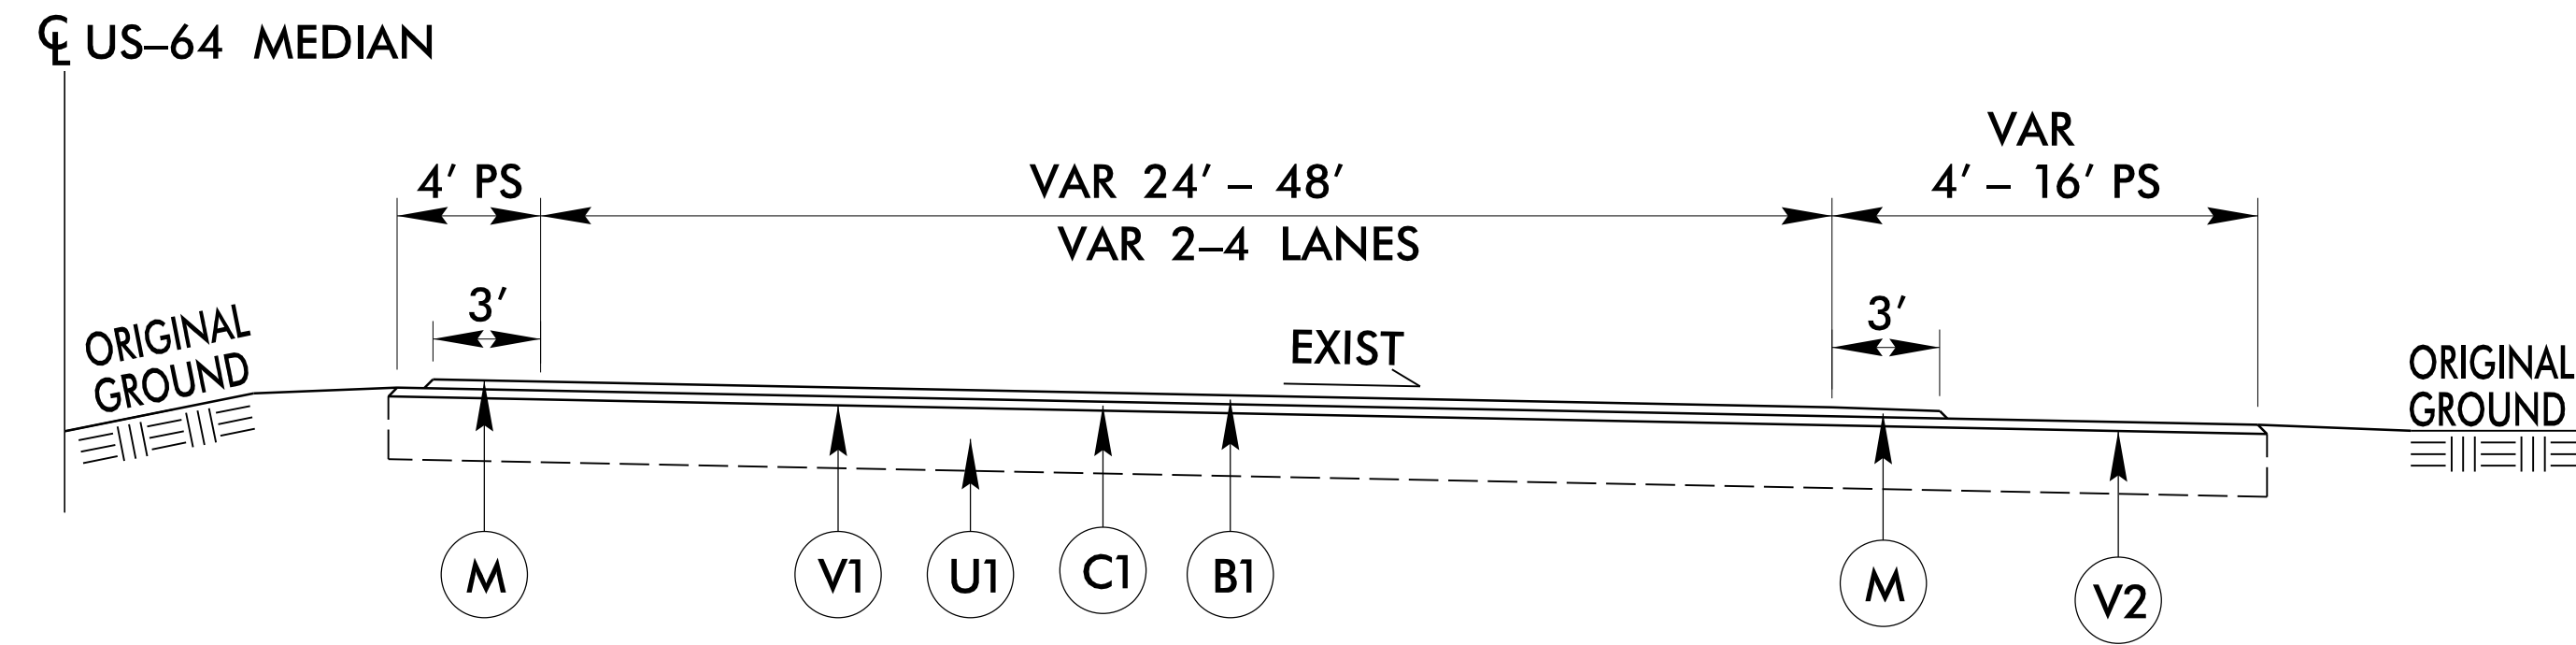

6/2/99
14-JUN-2022 15:41
S:\BDC\1-6046\1-6046-dbc4_TYP.dgn
Division 4 DDC