


PROJECT REFERENCE NO.	SHEET NO.
U-5710A	EC-6/CONST.6A
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

60" RCP CONSTRUCTION SEQUENCE STA. 20+00 -L- LT

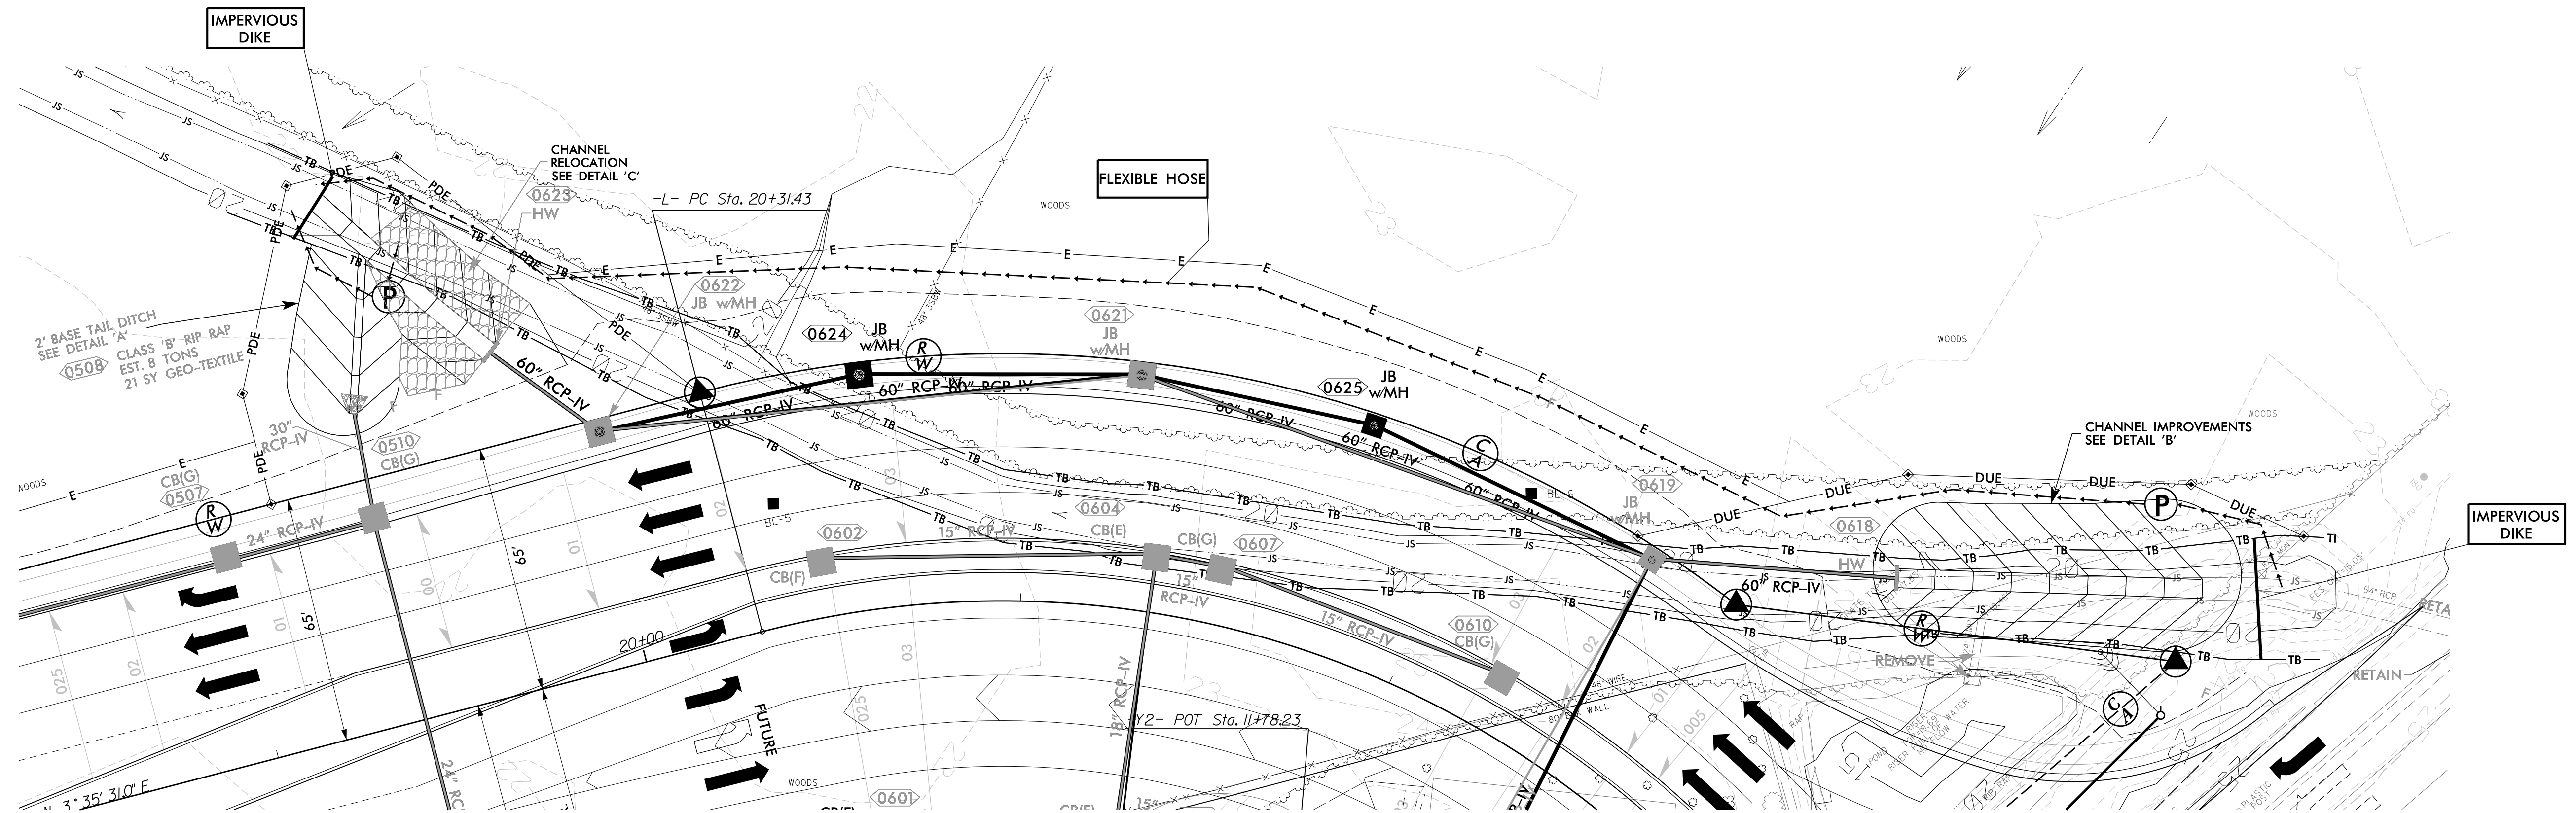

1. INSTALL IMPERVIOUS DIKES AT EXISTING 54" CULVERT OUTLET AND DOWNSTREAM OF WORK ZONE.
2. PROVIDE PUMP AND SPECIAL STILLING BASIN FOR DEWATERING OF THE WORK ZONE. USE FILTER FABRIC OR OTHER APPROPRIATE MEASURES TO PROTECT STREAM BANKS AROUND SPECIAL STILLING BASIN. ENSURE SPECIAL STILLING BASINS ARE LOCATED WITHIN EASEMENTS AND WITHIN PERMITTED IMPACT LOCATIONS.
3. UTILIZING PUMP AROUND OPERATION AND FLEXIBLE HOSE, CONSTRUCT 60" PIPES AND CHANNEL IMPROVEMENTS DOWNSTREAM AND UPSTREAM.
4. REMOVE IMPERVIOUS DIKES AND ALLOW STREAM TO FLOW INTO NEWLY CONSTRUCTED PIPES.
5. COMPLETE THE ROADWAY CONSTRUCTION.