

SUMMARY OF WORK BY CABLE ROUTING PLANS

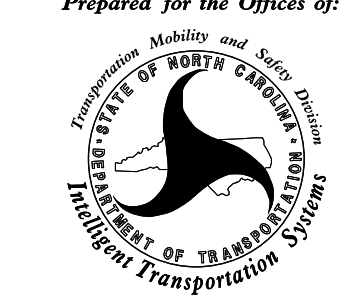
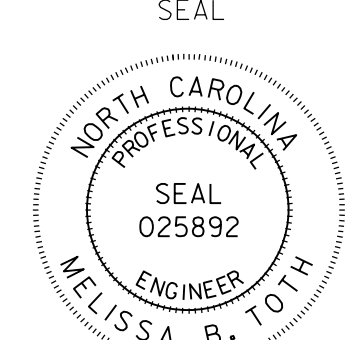
CABLE ROUTING SHEET NUMBER	COMMUNICATIONS CABLE (24-FIBER)	COMMUNICATIONS CABLE (36-FIBER)	DROP CABLE (6-FIBER)	HANDLASH & AERIAL CABLE PROTECTOR	SPLICE ENCLOSURE	MODIFY EXISTING SPLICE	INTERCONNECT CENTER	ETHERNET EDGE SWITCH	REMOVE EXISTING COMMUNICATIONS CABLE	REMOVE SPLICE CABINET	REMOVE CCTV CABINET	INSTALL CCTV CAMERA ASSEMBLY	REMOVE EX CCTV ASSEMBLY	INSTALL CCTV CABINET (336A, POLE)	INSTALL CCTV CABINET (NEMA 4, POLE)	INSTALL CCTV CABINET (336A, BUILDING)	INSTALL CCTV CABINET (336A, BASE) WITH FOUNDATION	CCTV WOOD POLE (55')	CCTV WOOD POLE (70')	ETHERNET CABLE (CAT 5E)	LOW VOLTAGE POWER CABLE (24VAC)	MODIFY ELEC SERVICE FOR CCTV	INSTALL DISCONNECT FOR CCTV	NEW ELEC SERVICE FOR CCTV	INSTALL 5/8" x 10' GROUNDING ELECTRODE FOR POWER	DIGITAL VIDEO ENCODER
	LF	LF	LF	LF	EA	EA	EA	EA	LF	EA	EA	EA	EA	EA	EA	EA	EA	EA	EA	LF	LF	EA	EA	EA	EA	EA
CRP-6.036	1,460	-	625	-	1	-	2	2	120	-	1	1	1	1	-	-	-	-	-	-	-	-	-	1	3	-
CRP-6.037	1,355	-	-	-	-	-	-	-	135	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.038	1,965	-	215	-	1	-	1	1	180	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.039	455	-	245	-	1	-	1	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.040	950	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.041	1,125	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.042	1,700	-	300	-	1	-	1	1	285	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.043	505	-	-	-	-	-	-	-	1,090	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.044	1,270	-	235	-	1	-	1	1	45	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.045	1,330	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.046	1,130	-	385	-	1	-	1	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.047	1,020	-	315	-	1	-	1	1	140	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.048	1,570	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.049	1,300	-	190	-	1	-	1	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.050	-	1,545	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.051	510	1,365	1,010	-	2	-	3	3	65	1	-	1	-	1	-	-	-	1	-	-	-	-	-	1	3	-
CRP-6.052	-	1,125	185	-	1	-	1	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.053	880	1,385	910	-	1	-	3	3	440	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.054	-	1,370	135	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.055	-	1,685	365	-	1	-	1	1	180	1	1	1	1	1	-	-	-	-	-	-	-	-	-	1	3	-
CRP-6.056	-	1,360	135	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.057	385	1,615	700	-	1	-	2	2	95	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.058	-	1,015	255	-	1	-	1	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.059	520	1,565	520	-	1	-	2	2	80	1	1	1	1	1	-	-	-	-	-	-	-	-	-	1	3	-
CRP-6.060	-	1,435	305	-	1	-	1	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.061	-	1,440	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.062	-	1,530	255	-	1	-	1	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.063	-	1,205	375	-	1	-	1	1	465	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.064	-	2,230	350	-	1	-	1	1	360	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.065	-	1,290	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.066	-	1,435	-	50	-	-	-	-	-	1	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.067	-	1,395	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.068	-	1,275	-	-	-	-	-	-	235	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRP-6.069	1,570	-	825	-	1	-	2	2	240	-	1	1	1	-	1	-	-	-	-	80	80	-	-	-	-	-
CRP-6.070	-	1,525	565	-	2	-	2	2	25	-	-	-	-	-	-	-	-	-	-	55	55	-	-	-	-	-

05-JUN-2015 11:12 D:\atkins\corporate\tr\off\c\cur\100037777 - High Point_Sig_Sys\Special Detail\ssw\Volume I\CRP-1.003.dgn WILE2054 AT DUS290140

- Work shown on this sheet is a summary of work for the installation of the fiber-optic cable and CCTV installations that are shown on the cable routing plans (i.e. CRP sheets). Work to be done for traffic signals is shown separately on the signal designs and the "Summary of Work by Intersection" sheets in Volume III of III.

- The items listed above are for informational purposes only and represent work that is necessary to complete the project and are not necessarily pay items. See Summary of Quantities and the Project Special Provisions for defined Pay Items for this contract.

ATKINS 1616 EAST MILLBROOK ROAD, SUITE 310
RALEIGH, NORTH CAROLINA 27609
(919) 876-6888 NCBES #F-0326

 <p>Prepared for the Offices of: Department of Transportation State of North Carolina</p>	<p>High Point Signal System Summary of Work by Cable Routing Plans (sheet 1 of 2)</p>		
	<p>Division 7 Guilford County High Point</p>	<p>PLAN DATE: June 2015 REVIEWED BY: MB Toth</p>	
<p>750 Greenfield Parkway, Garner, NC 27529</p>	<p>PREPARED BY: LMM REVIEWED BY: LM MOON</p>	<p>SCALE: NTS</p>	<p>DATE: 6/5/2015</p>