

+

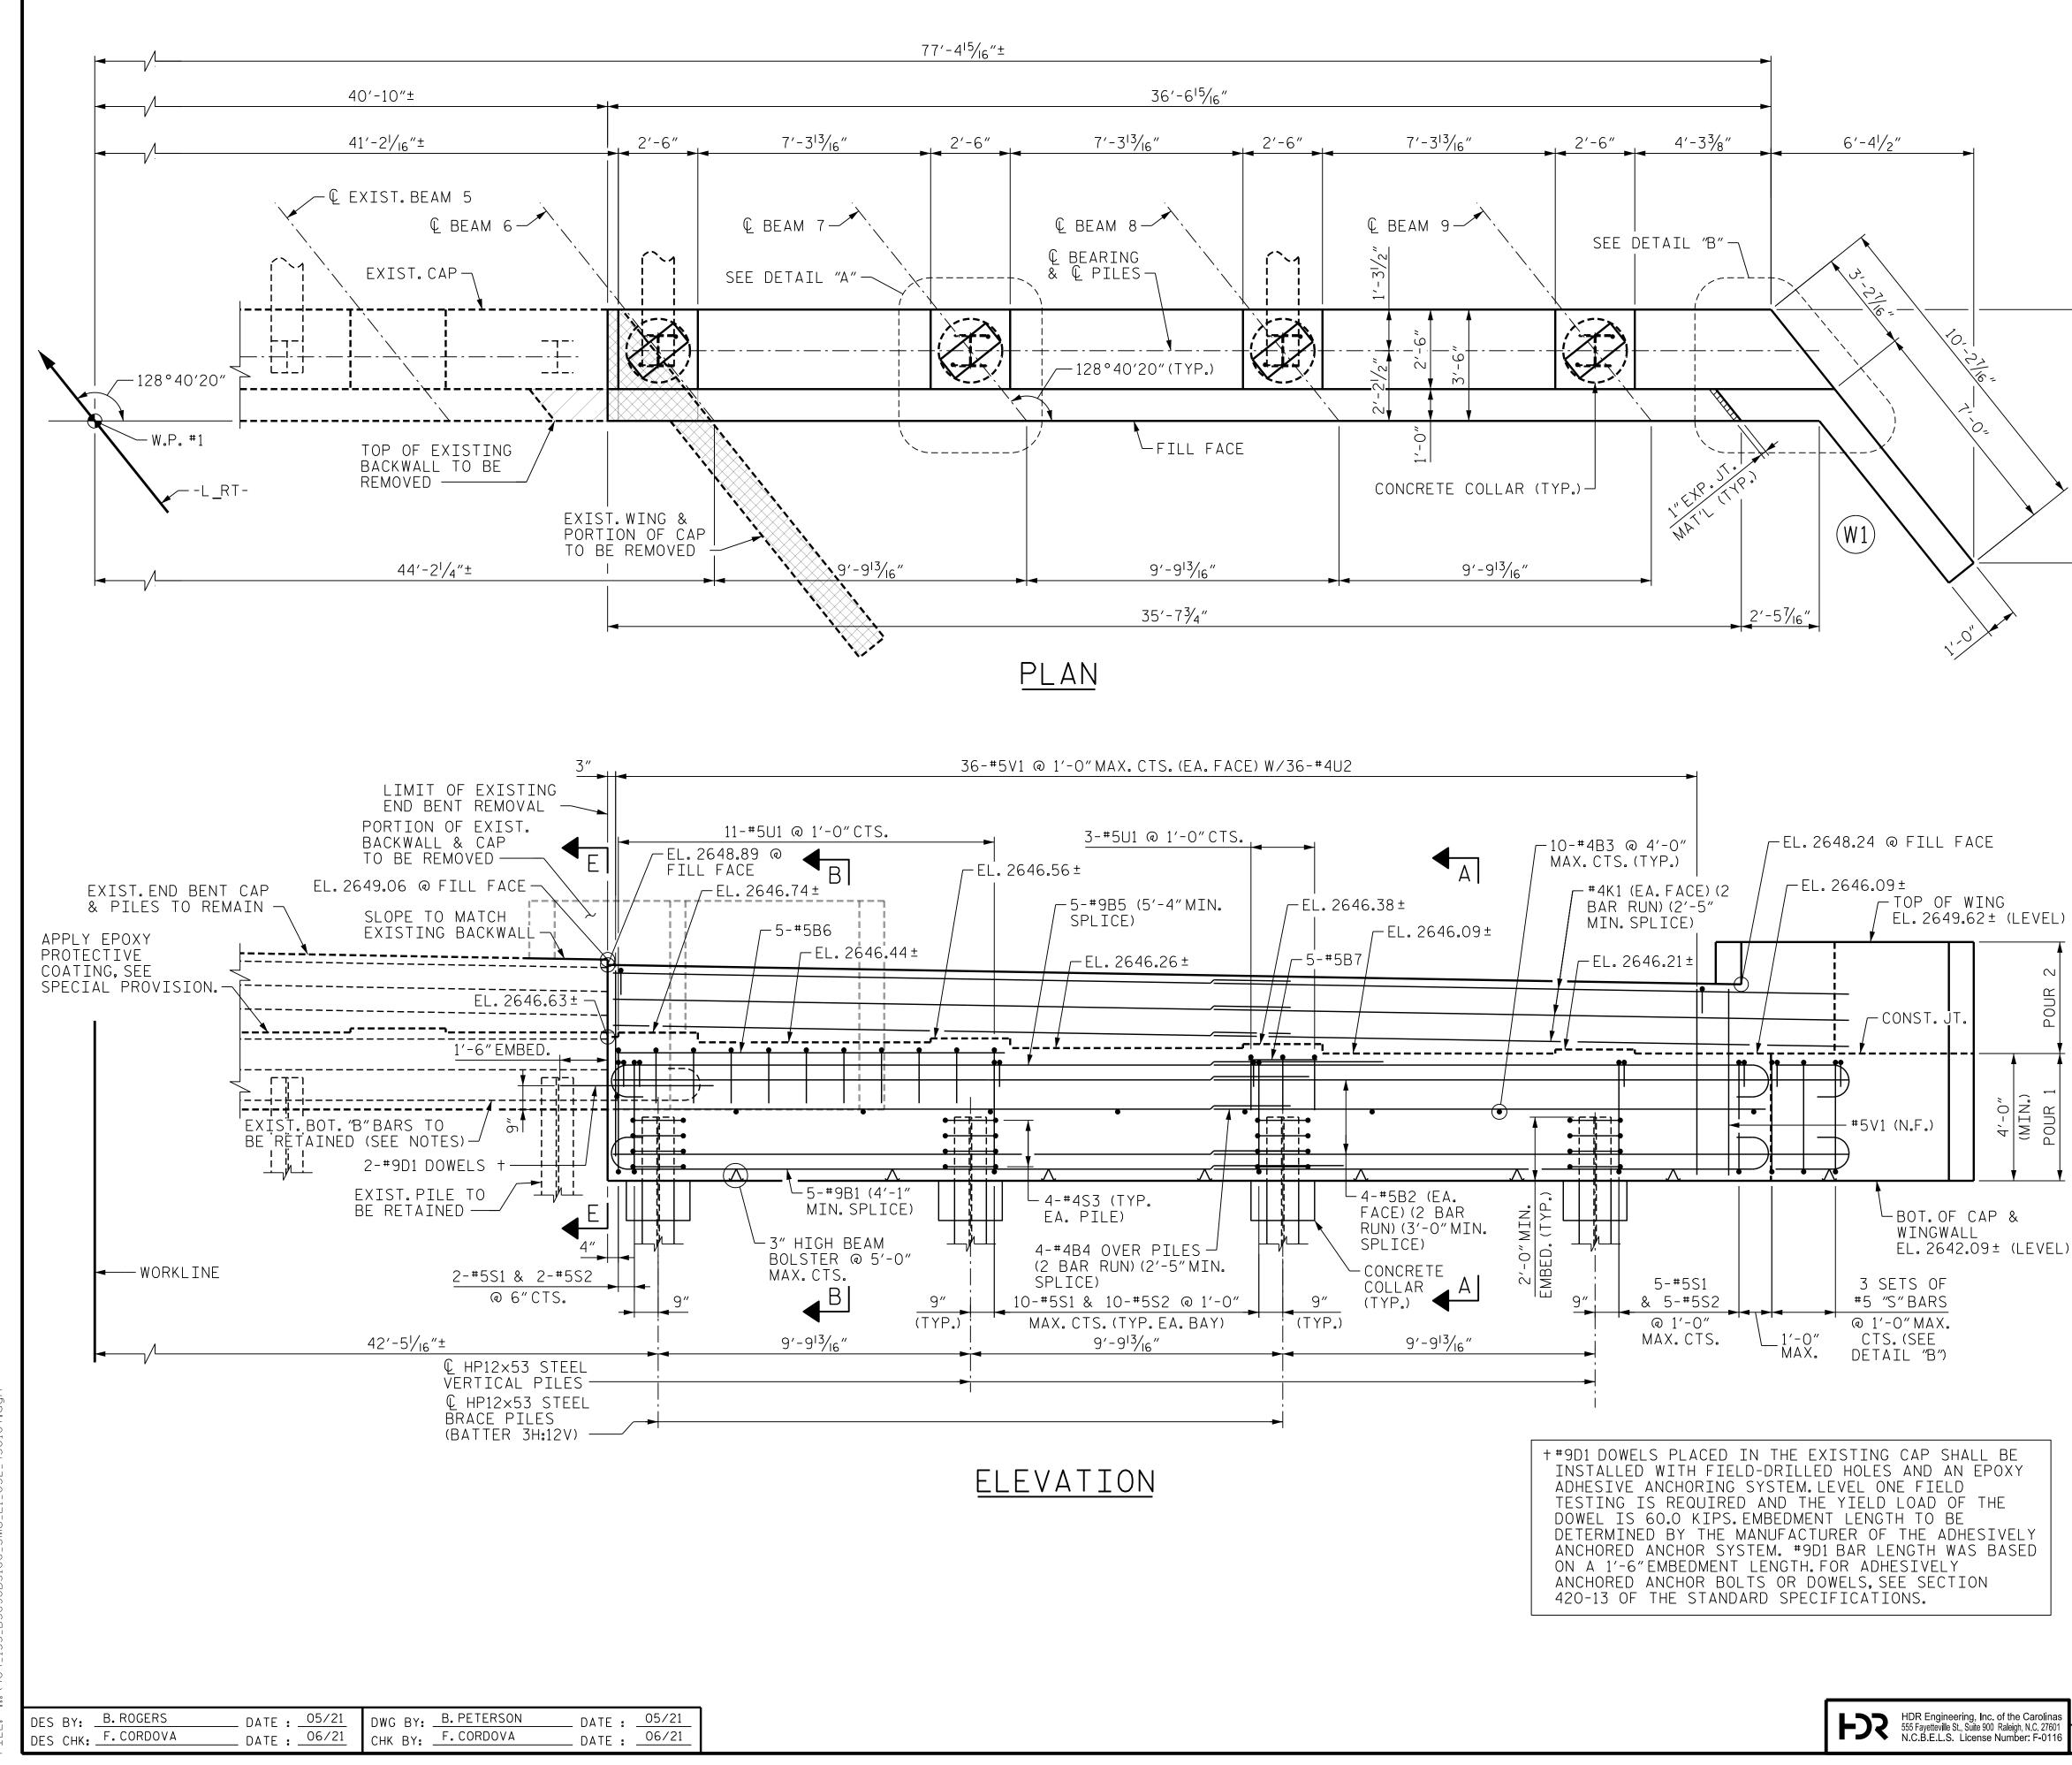

PENT / TIME:

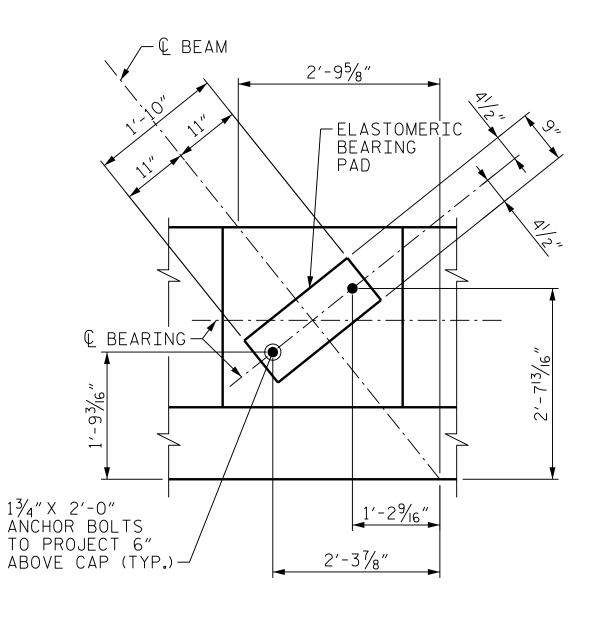

DETAIL "A"

NOTES

STIRRUPS IN CAP MAY BE SHIFTED AS NECESSARY TO CLEAR ANCHOR BOLTS.

BACKWALL SHALL BE PLACED BEFORE APPLYING THE EPOXY PROTECTIVE COATING.

THE TOP SURFACE AREAS OF THE END BENT CAP SHALL BE CURED IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS EXCEPT THE MEMBRANE CURING COMPOUND METHOD SHALL NOT BE USED.

THE TOP SURFACE OF THE CAP EXCEPT THE BRIDGE SEAT BUILDUPS SHALL BE SLOPED TRANSVERSELY FROM THE FILL FACE TO THE BACK FACE AT THE RATE OF 2%.

THE CONTRACTOR'S ATTENTION IS CALLED TO THE FACT THAT THE EXISTING BOTTOM #9 BARS SHALL BE RETAINED PAST THE SAW CUT LINE AND WILL BECOME PART OF THE WIDENED END BENT. THE EXISTING REINFORCING STEEL MAY BE BENT AS REQUIRED FOR FITTING INTO THE PROPOSED END BENT CAP.

FOR SECTIONS A-A AND B-B, VIEW E-E, AND DETAIL "B", SEE "SUBTRUCTURE END BENT 1 SECTIONS AND DETAILS" SHEET.

COAT EXPOSED ENDS OF EXISTING REBAR WITH EPOXY AFTER EXISTING BACKWALL AND CAP ARE REMOVED.

GRADE DATA. ELEVATIONS. DIMENSIONS. AND STATIONS WERE DETERMINED USING THE BEST INFORMATION AVAILABLE AND ARE PROVIDED FOR INFORMATION ONLY. THE CONTRACTOR SHALL SURVEY THE EXISTING STRUCTURE AND NOTIFY THE ENGINEER IN WRITING OF ANY DISCREPANCIES PRIOR TO ORDERING MATERIALS.

IN REMOVING EXISTING END BENT, MAKE A 11/2" MIN. DEPTH SAWCUT AROUND PERIMETER OF THE CAP AND BACKWALL. REMOVE REMAINING CONCRETE USING MEANS THAT AVOID DAMAGE TO THE EXISTING BOTTOM "B" BARS.

PROJECT NO. <u>B-3186/B-5898</u>

## HAYWOOD COUNTY

STATION: <u>68+65.7</u>5 ± -L\_RT-

SHEET 1 OF 3

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION RALEIGH

## SUBSTRUCTURE END BENT 1 PLAN AND ELEVATION

1/25/2022	REVISIONS						SHEET NO <b>.</b>
	NO.	BY:	DATE:	NO.	BY:	DATE:	SO3R-32
	1			3			TOTAL SHEETS
ONSIDERED FINAL TURES COMPLETED	2			4			61

11%

4'-0"

TH CARO

OR FESSION !!

SEAL

043854

SNGINEE W. NON

DOCUMENT NOT CONSIDERED FINA UNLESS ALL SIGNATURES COMPLET

Eric Nolting