

REFERENCE: B-3186/B-5898

PROJECT: 38332/48030

CONTENTS

<u>SHEET NO.</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2	LEGEND (SOIL & ROCK)
3	SITE PLAN
4	PROFILE
5-15	BORE LOGS

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

COUNTY HAYWOOD
 PROJECT DESCRIPTION US 23/US 74/US 19 (GREAT SMOKY MOUNTAIN HWY) FROM WEST OF NC 209 (CRABTREE RD.) TO EAST OF RUSS AVE.
 SITE DESCRIPTION RETAINING WALL #3 FROM -YIRT- STA. 29+34.68 TO 40+54.00

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	B-3186/B-5898	1	15

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

- NOTES:
- THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
 - BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

PERSONNEL

R. DUGGER
N. YACOBI
GEOTECHNOLOGY, INC.

INVESTIGATED BY C. SWAFFORD
 DRAWN BY T. LYNN
 CHECKED BY K. BUSSEY
 SUBMITTED BY HDR
 DATE NOVEMBER 2021































HDR HDR Engineering, Inc. of the Carolinas
 555 Fayetteville St, Suite 900 Raleigh, N.C. 27601
 N.C.B.E.L.S. License Number: F-0116




SIGNATURE _____ DATE _____


**DOCUMENT NOT CONSIDERED FINAL
 UNLESS ALL SIGNATURES COMPLETED**

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT
SUBSURFACE INVESTIGATION
SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

SOIL DESCRIPTION										GRADATION										ROCK DESCRIPTION										TERMS AND DEFINITIONS																																																																									
SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (AASHTO T 206, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, <i>VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6</i>										WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORMLY GRADED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.										HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED, AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:										ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOADED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (IN OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.																																																																									
SOIL LEGEND AND AASHTO CLASSIFICATION										ANGULARITY OF GRAINS THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.										WEATHERED ROCK (WR) 										CRSTALLINE ROCK (CR) 										NON-CRYSTALLINE ROCK (NCR) 										COASTAL PLAIN SEDIMENTARY ROCK (CP) 																																																					
MINERALOGICAL COMPOSITION MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.										COMPRESSIONIBILITY SLIGHTLY COMPRESSIBLE LL < 31 MODERATELY COMPRESSIBLE LL = 31 - 50 HIGHLY COMPRESSIBLE LL > 50										WEATHERING FRESH - ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE. VERY SLIGHT (V SL.) - ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN. CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE. SLIGHT (SL.) - ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS. MODERATE (MOD.) - SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK. MODERATELY SEVERE (MOD. SEV.) - ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. <i>IF TESTED, WOULD YIELD SPT REFUSAL</i> SEVERE (SEV.) - ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. <i>IF TESTED, WOULD YIELD SPT N VALUES > 100 BPF</i> VERY SEVERE (V SEV.) - ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE THAT ONLY MINOR VESTIGES OF ORIGINAL ROCK FABRIC REMAIN. <i>IF TESTED, WOULD YIELD SPT N VALUES < 100 BPF</i> COMPLETE - ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.																																																																																			
PERCENTAGE OF MATERIAL <table border="1"> <tr> <th>ORGANIC MATERIAL</th> <th>GRANULAR SOILS</th> <th>SILT - CLAY SOILS</th> <th>OTHER MATERIAL</th> </tr> <tr> <td>TRACE OF ORGANIC MATTER</td> <td>2 - 3%</td> <td>3 - 5%</td> <td>TRACE 1 - 10%</td> </tr> <tr> <td>LITTLE ORGANIC MATTER</td> <td>3 - 5%</td> <td>5 - 12%</td> <td>LITTLE 10 - 20%</td> </tr> <tr> <td>MODERATELY ORGANIC</td> <td>5 - 10%</td> <td>12 - 20%</td> <td>SOME 20 - 35%</td> </tr> <tr> <td>HIGHLY ORGANIC</td> <td>> 10%</td> <td>> 20%</td> <td>HIGHLY 35% AND ABOVE</td> </tr> </table>										ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL	TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%	LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%	MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%	HIGHLY ORGANIC	> 10%	> 20%	HIGHLY 35% AND ABOVE	GROUND WATER  WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING  STATIC WATER LEVEL AFTER 24 HOURS  PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA  SPRING OR SEEP										MISCELLANEOUS SYMBOLS  ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION  SOIL SYMBOL  ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT  INFERRED SOIL BOUNDARY  INFERRED ROCK LINE  ALLUVIAL SOIL BOUNDARY  DIP & DIP DIRECTION OF ROCK STRUCTURES  TEST BORING  AUGER BORING  CORE BORING  MONITORING WELL  PIEZOMETER INSTALLATION  SLOPE INDICATOR INSTALLATION  CONE PENETROMETER TEST  SOUNDING ROD  TEST BORING WITH CORE  SPT N-VALUE																																																															
ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL																																																																																																				
TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%																																																																																																				
LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%																																																																																																				
MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%																																																																																																				
HIGHLY ORGANIC	> 10%	> 20%	HIGHLY 35% AND ABOVE																																																																																																				
CONSISTENCY OR DENSENESS <table border="1"> <tr> <th>PRIMARY SOIL TYPE</th> <th>COMPACTNESS OR CONSISTENCY</th> <th>RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)</th> <th>RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT²)</th> </tr> <tr> <td>GENERALLY GRANULAR MATERIAL (NON-COHESSIVE)</td> <td>VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE</td> <td>< 4 4 TO 10 10 TO 30 30 TO 50 > 50</td> <td>N/A</td> </tr> <tr> <td>GENERALLY SILT-CLAY MATERIAL (COHESIVE)</td> <td>VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD</td> <td>< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30</td> <td>< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4</td> </tr> </table>										PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)	GENERALLY GRANULAR MATERIAL (NON-COHESSIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A	GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4	RECOMMENDATION SYMBOLS  UNDERCUT  SHALLOW UNDERCUT  UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE  UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK  UNCLASSIFIED EXCAVATION - ACCEPTABLE, BUT NOT TO BE USED IN THE TOP 3 FEET OF EMBANKMENT OR BACKFILL										ABBREVIATIONS AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - CONE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST e - VOID RATIO F - FINE FOSS. - FOSSILIFEROUS FRAC. - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HI. - HIGHLY MED. - MEDIUM MICA - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITIC SD. - SAND, SANDY SL. - SILT, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY VST - VANE SHEAR TEST WEA. - WEATHERED W - UNIT WEIGHT W _g - DRY UNIT WEIGHT SAMPLE ABBREVIATIONS S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACTED TRIAXIAL CBR - CALIFORNIA BEARING RATIO																																																																							
PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)																																																																																																				
GENERALLY GRANULAR MATERIAL (NON-COHESSIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A																																																																																																				
GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4																																																																																																				
TEXTURE OR GRAIN SIZE <table border="1"> <tr> <th>U.S. STD. SIEVE SIZE OPENING (MM)</th> <th>4</th> <th>10</th> <th>40</th> <th>60</th> <th>200</th> <th>270</th> </tr> <tr> <td></td> <td>4.75</td> <td>2.00</td> <td>0.42</td> <td>0.25</td> <td>0.075</td> <td>0.053</td> </tr> <tr> <th>BOULDER (BLDR.)</th> <th>COBBLE (COB.)</th> <th>GRAVEL (GR.)</th> <th>COARSE SAND (CSE. SD.)</th> <th>FINE SAND (F SD.)</th> <th>SILT (SL.)</th> <th>CLAY (CL.)</th> </tr> <tr> <td>GRAIN SIZE</td> <td>MM 305 IN. 12</td> <td>75</td> <td>2.0</td> <td>0.25</td> <td>0.05</td> <td>0.005</td> </tr> </table>										U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270		4.75	2.00	0.42	0.25	0.075	0.053	BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)	GRAIN SIZE	MM 305 IN. 12	75	2.0	0.25	0.05	0.005	SOIL MOISTURE - CORRELATION OF TERMS <table border="1"> <tr> <th>SOIL MOISTURE SCALE (ATTERBERG LIMITS)</th> <th>FIELD MOISTURE DESCRIPTION</th> <th>GUIDE FOR FIELD MOISTURE DESCRIPTION</th> </tr> <tr> <td rowspan="2">LL - LIQUID LIMIT PL - PLASTIC LIMIT</td> <td>- SATURATED - (SAT.)</td> <td>USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE</td> </tr> <tr> <td>- WET - (W)</td> <td>SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE</td> </tr> <tr> <td rowspan="2">OM - OPTIMUM MOISTURE SL - SHRINKAGE LIMIT</td> <td>- MOIST - (M)</td> <td>SOLID; AT OR NEAR OPTIMUM MOISTURE</td> </tr> <tr> <td>- DRY - (D)</td> <td>REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td> </tr> </table>										SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION	LL - LIQUID LIMIT PL - PLASTIC LIMIT	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE	OM - OPTIMUM MOISTURE SL - SHRINKAGE LIMIT	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE	EQUIPMENT USED ON SUBJECT PROJECT <table border="1"> <tr> <th>DRILL UNITS:</th> <th>ADVANCING TOOLS:</th> <th>HAMMER TYPE:</th> </tr> <tr> <td><input type="checkbox"/> CME-45C</td> <td><input type="checkbox"/> CLAY BITS</td> <td><input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL</td> </tr> <tr> <td><input checked="" type="checkbox"/> CME-55</td> <td><input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER</td> <td>CORE SIZE:</td> </tr> <tr> <td><input checked="" type="checkbox"/> CME-550X</td> <td><input checked="" type="checkbox"/> 8" HOLLOW AUGERS</td> <td><input type="checkbox"/> -B <input type="checkbox"/> -H</td> </tr> <tr> <td><input type="checkbox"/> VANE SHEAR TEST</td> <td><input type="checkbox"/> HARD FACED FINGER BITS</td> <td><input type="checkbox"/> -N</td> </tr> <tr> <td><input type="checkbox"/> PORTABLE HOIST</td> <td><input type="checkbox"/> TUNG-CARBIDE INSERTS</td> <td>HAND TOOLS:</td> </tr> <tr> <td><input checked="" type="checkbox"/> CME-17</td> <td><input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER</td> <td><input type="checkbox"/> POST HOLE DIGGER</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input type="checkbox"/> TRICONE *STEEL TEETH</td> <td><input type="checkbox"/> HAND AUGER</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input type="checkbox"/> TRICONE *TUNG-CARB.</td> <td><input type="checkbox"/> SOUNDING ROD</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input type="checkbox"/> CORE BIT</td> <td><input type="checkbox"/> VANE SHEAR TEST</td> </tr> <tr> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> <td><input type="checkbox"/></td> </tr> </table>										DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:	<input type="checkbox"/> CME-45C	<input type="checkbox"/> CLAY BITS	<input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL	<input checked="" type="checkbox"/> CME-55	<input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER	CORE SIZE:	<input checked="" type="checkbox"/> CME-550X	<input checked="" type="checkbox"/> 8" HOLLOW AUGERS	<input type="checkbox"/> -B <input type="checkbox"/> -H	<input type="checkbox"/> VANE SHEAR TEST	<input type="checkbox"/> HARD FACED FINGER BITS	<input type="checkbox"/> -N	<input type="checkbox"/> PORTABLE HOIST	<input type="checkbox"/> TUNG-CARBIDE INSERTS	HAND TOOLS:	<input checked="" type="checkbox"/> CME-17	<input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER	<input type="checkbox"/> POST HOLE DIGGER	<input type="checkbox"/>	<input type="checkbox"/> TRICONE *STEEL TEETH	<input type="checkbox"/> HAND AUGER	<input type="checkbox"/>	<input type="checkbox"/> TRICONE *TUNG-CARB.	<input type="checkbox"/> SOUNDING ROD	<input type="checkbox"/>	<input type="checkbox"/> CORE BIT	<input type="checkbox"/> VANE SHEAR TEST	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270																																																																																																	
	4.75	2.00	0.42	0.25	0.075	0.053																																																																																																	
BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)																																																																																																	
GRAIN SIZE	MM 305 IN. 12	75	2.0	0.25	0.05	0.005																																																																																																	
SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION																																																																																																					
LL - LIQUID LIMIT PL - PLASTIC LIMIT	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE																																																																																																					
	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE																																																																																																					
OM - OPTIMUM MOISTURE SL - SHRINKAGE LIMIT	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE																																																																																																					
	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																																																					
DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:																																																																																																					
<input type="checkbox"/> CME-45C	<input type="checkbox"/> CLAY BITS	<input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL																																																																																																					
<input checked="" type="checkbox"/> CME-55	<input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER	CORE SIZE:																																																																																																					
<input checked="" type="checkbox"/> CME-550X	<input checked="" type="checkbox"/> 8" HOLLOW AUGERS	<input type="checkbox"/> -B <input type="checkbox"/> -H																																																																																																					
<input type="checkbox"/> VANE SHEAR TEST	<input type="checkbox"/> HARD FACED FINGER BITS	<input type="checkbox"/> -N																																																																																																					
<input type="checkbox"/> PORTABLE HOIST	<input type="checkbox"/> TUNG-CARBIDE INSERTS	HAND TOOLS:																																																																																																					
<input checked="" type="checkbox"/> CME-17	<input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER	<input type="checkbox"/> POST HOLE DIGGER																																																																																																					
<input type="checkbox"/>	<input type="checkbox"/> TRICONE *STEEL TEETH	<input type="checkbox"/> HAND AUGER																																																																																																					
<input type="checkbox"/>	<input type="checkbox"/> TRICONE *TUNG-CARB.	<input type="checkbox"/> SOUNDING ROD																																																																																																					
<input type="checkbox"/>	<input type="checkbox"/> CORE BIT	<input type="checkbox"/> VANE SHEAR TEST																																																																																																					
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>																																																																																																					
PLASTICITY <table border="1"> <tr> <th>NON PLASTIC</th> <th>PLASTICITY INDEX (PI)</th> <th>DRY STRENGTH</th> </tr> <tr> <td>SLIGHTLY PLASTIC</td> <td>0-5</td> <td>VERY LOW</td> </tr> <tr> <td>MODERATELY PLASTIC</td> <td>6-15</td> <td>SLIGHT</td> </tr> <tr> <td>HIGHLY PLASTIC</td> <td>16-25</td> <td>MEDIUM</td> </tr> <tr> <td></td> <td>26 OR MORE</td> <td>HIGH</td> </tr> </table>										NON PLASTIC	PLASTICITY INDEX (PI)	DRY STRENGTH	SLIGHTLY PLASTIC	0-5	VERY LOW	MODERATELY PLASTIC	6-15	SLIGHT	HIGHLY PLASTIC	16-25	MEDIUM		26 OR MORE	HIGH	FRACTURE SPACING <table border="1"> <tr> <th>TERM</th> <th>SPACING</th> </tr> <tr> <td>VERY WIDE</td> <td>MORE THAN 10 FEET</td> </tr> <tr> <td>WIDE</td> <td>3 TO 10 FEET</td> </tr> <tr> <td>MODERATELY CLOSE</td> <td>1 TO 3 FEET</td> </tr> <tr> <td>CLOSE</td> <td>0.16 TO 1 FOOT</td> </tr> <tr> <td>VERY CLOSE</td> <td>LESS THAN 0.16 FEET</td> </tr> </table>										TERM	SPACING	VERY WIDE	MORE THAN 10 FEET	WIDE	3 TO 10 FEET	MODERATELY CLOSE	1 TO 3 FEET	CLOSE	0.16 TO 1 FOOT	VERY CLOSE	LESS THAN 0.16 FEET	BEDDING <table border="1"> <tr> <th>TERM</th> <th>THICKNESS</th> </tr> <tr> <td>VERY THICKLY BEDDED</td> <td>4 FEET</td> </tr> <tr> <td>THICKLY BEDDED</td> <td>1.5 - 4 FEET</td> </tr> <tr> <td>THINLY BEDDED</td> <td>0.16 - 1.5 FEET</td> </tr> <tr> <td>VERY THINLY BEDDED</td> <td>0.03 - 0.16 FEET</td> </tr> <tr> <td>THICKLY LAMINATED</td> <td>0.008 - 0.03 FEET</td> </tr> <tr> <td>THINLY LAMINATED</td> <td>< 0.008 FEET</td> </tr> </table>										TERM	THICKNESS	VERY THICKLY BEDDED	4 FEET	THICKLY BEDDED	1.5 - 4 FEET	THINLY BEDDED	0.16 - 1.5 FEET	VERY THINLY BEDDED	0.03 - 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET	THINLY LAMINATED	< 0.008 FEET																																	
NON PLASTIC	PLASTICITY INDEX (PI)	DRY STRENGTH																																																																																																					
SLIGHTLY PLASTIC	0-5	VERY LOW																																																																																																					
MODERATELY PLASTIC	6-15	SLIGHT																																																																																																					
HIGHLY PLASTIC	16-25	MEDIUM																																																																																																					
	26 OR MORE	HIGH																																																																																																					
TERM	SPACING																																																																																																						
VERY WIDE	MORE THAN 10 FEET																																																																																																						
WIDE	3 TO 10 FEET																																																																																																						
MODERATELY CLOSE	1 TO 3 FEET																																																																																																						
CLOSE	0.16 TO 1 FOOT																																																																																																						
VERY CLOSE	LESS THAN 0.16 FEET																																																																																																						
TERM	THICKNESS																																																																																																						
VERY THICKLY BEDDED	4 FEET																																																																																																						
THICKLY BEDDED	1.5 - 4 FEET																																																																																																						
THINLY BEDDED	0.16 - 1.5 FEET																																																																																																						
VERY THINLY BEDDED	0.03 - 0.16 FEET																																																																																																						
THICKLY LAMINATED	0.008 - 0.03 FEET																																																																																																						
THINLY LAMINATED	< 0.008 FEET																																																																																																						
COLOR DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.										INDURATION FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.										NOTES: BORING ELEVATIONS OBTAINED USING b3186_br0022_r4047_Mer ged.1-12-21.tin FIAD - FILLED IMMEDIATELY AFTER DRILLING																																																																																			
BENCH MARK: N/A										ELEVATION: FEET										DATE: 8-15-14																																																																																			

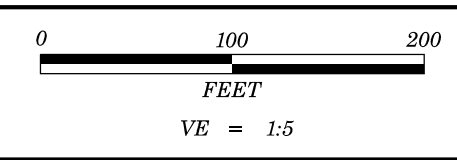

SOIL TEST RESULTS															
SAMPLE NO.	OFFSET	STATION	DEPTH INTERVAL	AASHTO CLASS.	L.L.	P.I.	% BY WEIGHT				% PASSING (SIEVES)			% MOISTURE	% ORGANIC
							C.SAND	F.SAND	SILT	CLAY	10	40	200		
SS-24	7' LT	29+84	15.0' - 16.1'	A-7-6 (11)	47	23	20.8	20.5	23.6	35.1	92.0	79.1	58.5	26	-
SS-58	3' LT	30+33	7.5' - 9.0'	A-5 (2)	44	10	26.6	29.4	23.9	20.1	88.8	73.7	44.4	28	-
SS-62	3' LT	30+33	25.0' - 26.5'	A-7-5 (31)	82	33	16.9	8.5	58.4	16.2	100	87.0	77.1	71	-
SS-35	1' RT	30+80	10.0' - 11.5'	A-4 (2)	38	9	27.5	26.8	24.5	21.2	94.3	76.9	48.8	25	-
SS-46	1' RT	30+80	55.0' - 56.5'	A-2-4	32	NP	47.6	32.0	9.7	10.7	98.9	67.6	26.2	18	-

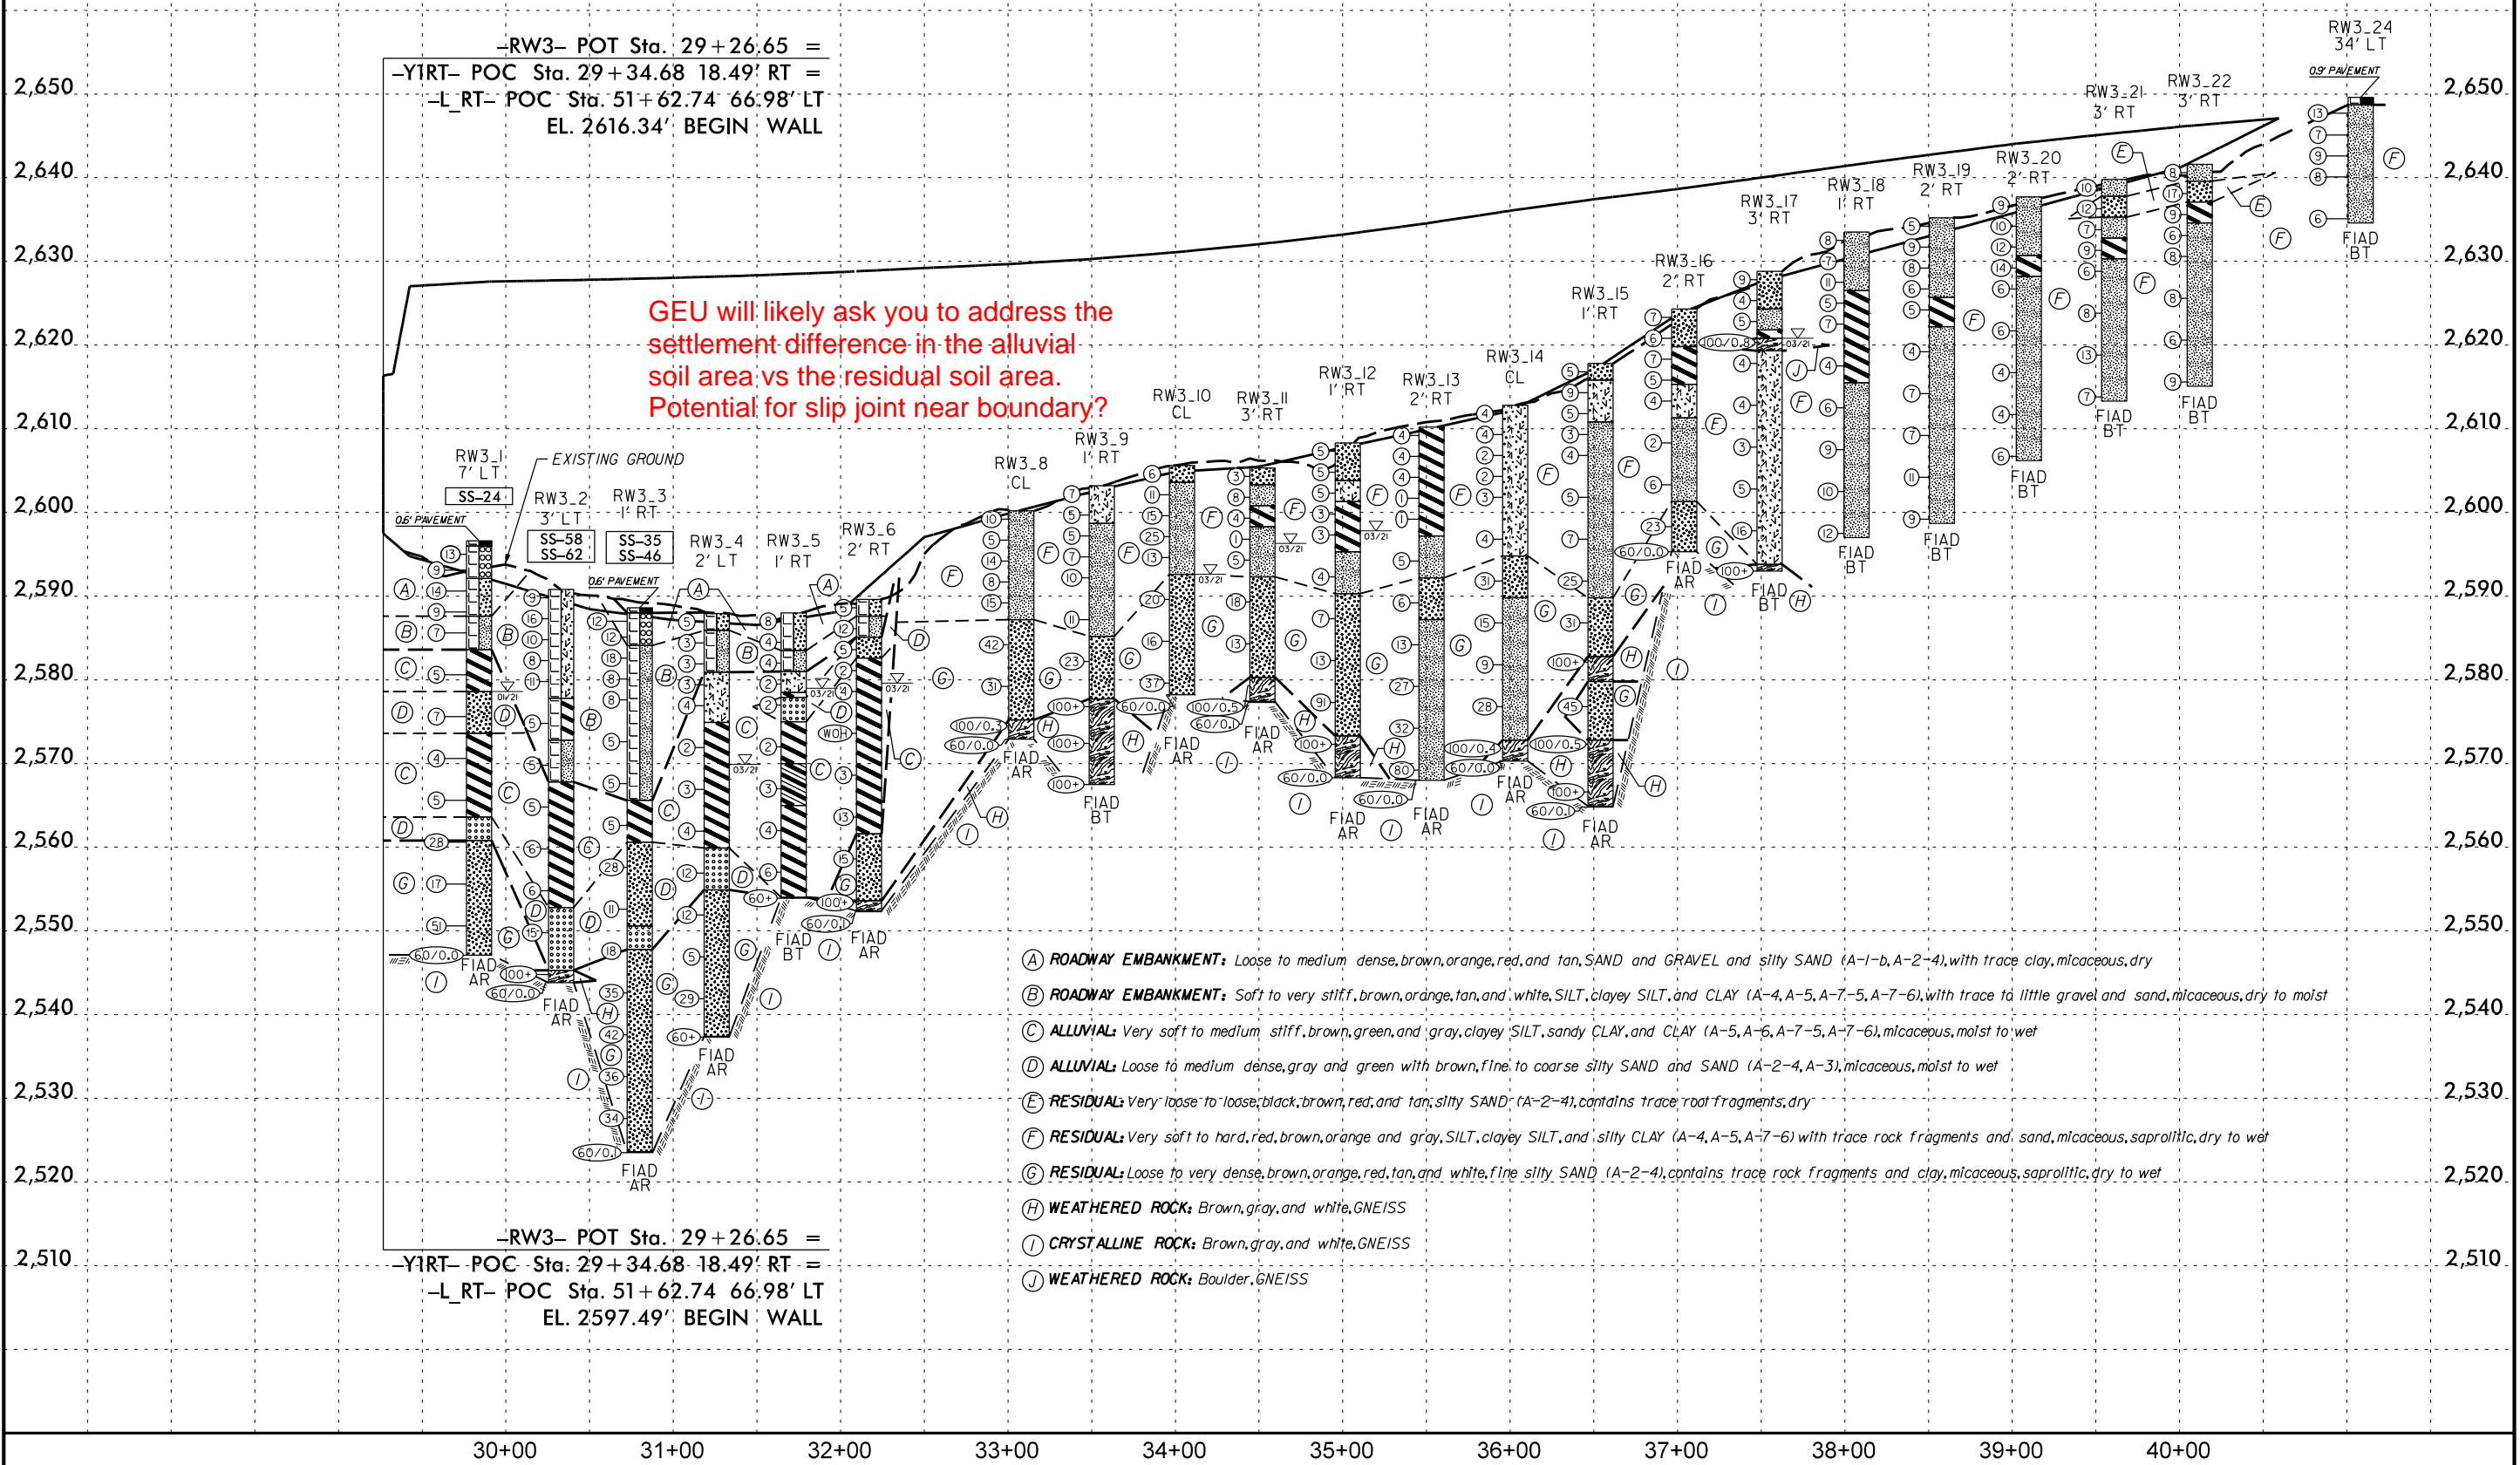

- (A) **ROADWAY EMBANKMENT:** Loose to medium dense, brown, orange, red, and tan, SAND and GRAVEL and silty SAND (A-1-b, A-2-4), with trace clay, micaceous, dry
- (B) **ROADWAY EMBANKMENT:** Soft to very stiff, brown, orange, tan, and white, SILT, clayey SILT, and CLAY (A-4, A-5, A-7-5, A-7-6), with trace to little gravel and sand, micaceous, dry to moist
- (C) **ALLUVIAL:** Very soft to medium stiff, brown, green, and gray, clayey SILT, sandy CLAY, and CLAY (A-5, A-6, A-7-5, A-7-6), micaceous, moist to wet
- (D) **ALLUVIAL:** Loose to medium dense, gray and green with brown, fine to coarse silty SAND and SAND (A-2-4, A-3), micaceous, moist to wet
- (E) **RESIDUAL:** Very loose to loose, black, brown, red, and tan, silty SAND (A-2-4), contains trace root fragments, dry
- (F) **RESIDUAL:** Very soft to hard, red, brown, orange and gray, SILT, clayey SILT, and silty CLAY (A-4, A-5, A-7-6) with trace rock fragments and sand, micaceous, saprolitic, dry to wet
- (G) **RESIDUAL:** Loose to very dense, brown, orange, red, tan, and white, fine silty SAND (A-2-4), contains trace rock fragments and clay, micaceous, saprolitic, dry to wet
- (H) **WEATHERED ROCK:** Brown, gray, and white, GNEISS
- (I) **CRYSTALLINE ROCK:** Brown, gray, and white, GNEISS
- (J) **WEATHERED ROCK:** Boulder, GNEISS

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 38332.1.FS1		TIP B-3186 / B-5898		COUNTY HAYWOOD		GEOLOGIST R. Dugger									
SITE DESCRIPTION Retaining Wall No. 3 from -Y1RT- STA 29+35 to 40+54							GROUND WTR (ft)								
BORING NO. RW3_1		STATION 29+84		OFFSET 7 ft LT		ALIGNMENT -RW3-									
COLLAR ELEV. 2,596.6 ft		TOTAL DEPTH 49.5 ft		NORTHING 666,986		EASTING 819,622									
DRILL RIGHAMMER EFF./DATE GTC9083 CME-550X 80%(11/24/2020)			DRILL METHOD H.S. Augers			HAMMER TYPE Automatic									
DRILLER L. Wanstrath		START DATE 01/28/21		COMP. DATE 01/28/21		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
2600															
2595	2,596.0	0.6	8	7	6										
	2,594.1	2.5	3	4	5										
	2,591.6	5.0	7	7	7										
2590	2,589.1	7.5	6	5	4										
	2,586.6	10.0	3	3	4										
2585															
	2,581.6	15.0	3	2	3										
2580															
	2,576.6	20.0	3	3	4										
2575															
	2,571.6	25.0	1	2	2										
2570															
	2,566.6	30.0	WOH	2	3										
2565															
	2,561.6	35.0	4	15	13										
2560															
	2,556.6	40.0	5	7	10										
2555															
	2,551.6	45.0	18	19	32										
2550															
	2,547.1	49.5													
		60/0.0													

WBS 38332.1.FS1		TIP B-3186 / B-5898		COUNTY HAYWOOD		GEOLOGIST R. Dugger									
SITE DESCRIPTION Retaining Wall No. 3 from -Y1RT- STA 29+35 to 40+54							GROUND WTR (ft)								
BORING NO. RW3_2		STATION 30+33		OFFSET 3 ft LT		ALIGNMENT -RW3-									
COLLAR ELEV. 2,590.8 ft		TOTAL DEPTH 47.0 ft		NORTHING 666,998		EASTING 819,670									
DRILL RIGHAMMER EFF./DATE GTC9083 CME-550X 80%(11/24/2020)			DRILL METHOD H.S. Augers			HAMMER TYPE Automatic									
DRILLER L. Wanstrath		START DATE 01/29/21		COMP. DATE 01/29/21		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
2595															
	2,590.8	0.0													
2590			4	4	5										
	2,588.3	2.5	5	8	8										
	2,585.8	5.0	5	5	5										
2585			3	3	5										
	2,583.3	7.5													
2580			3	5	6										
	2,580.8	10.0													
2575			1	2	3										
	2,575.8	15.0													
2570			2	2	3										
	2,570.8	20.0													
2565			2	2	3										
	2,565.8	25.0													
2560			1	2	4										
	2,560.8	30.0													
2555			2	2	4										
	2,555.8	35.0													
2550			7	7	11										
	2,550.8	40.0													
2545			6	100/0.3											
	2,545.8	45.0													
	2,543.8	47.0													
		60/0.0													

NCDOT BORE DOUBLE B3186_GEO_SPT.GPJ_NC_DOT.GDT 8/11/21

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 38332.1.FS1		TIP B-3186 / B-5898		COUNTY HAYWOOD		GEOLOGIST N. Yacobi										
SITE DESCRIPTION Retaining Wall No. 3 from -Y1RT- STA 29+35 to 40+54							GROUND WTR (ft)									
BORING NO. RW3_5		STATION 31+72		OFFSET 1 ft RT		ALIGNMENT -RW3-										
COLLAR ELEV. 2,588.0 ft		TOTAL DEPTH 34.1 ft		NORTHING 667,041		EASTING 819,802										
DRILL RIGHAMMER EFF./DATE GTC8255 CME-55 93%(11/24/2020)			DRILL METHOD H.S. Augers			HAMMER TYPE Automatic										
DRILLER L. Wanstrath		START DATE 03/02/21		COMP. DATE 03/12/21		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2590																
	2,588.0	0.0	2	4	4										2,588.0	GROUND SURFACE
2585	2,585.5	2.5	4	2	2										2,583.5	ROADWAY EMBANKMENT Loose, brown and tan, silty SAND (A-2-4), with trace clay, micaceous
	2,583.0	5.0	2	2	2										2,581.0	Soft to medium stiff, brown, SILT (A-4)
2580	2,580.5	7.5	1	1	1										2,578.0	ALLUVIAL Soft, gray and green, clayey SILT (A-5), micaceous
	2,578.0	10.0	1	1	1										2,575.0	ALLUVIAL Very loose, gray and green, SAND (A-3), with a layer of clay 10.0 to 10.1'
2575																
	2,573.0	15.0	1	1	1											
2570																
	2,568.0	20.0	0	1	2											
2565																
	2,563.0	25.0	1	2	2											
2560																
	2,558.0	30.0	5	1	5											
2555																
	2,554.0	34.0	100/0.1												60+	

WBS 38332.1.FS1		TIP B-3186 / B-5898		COUNTY HAYWOOD		GEOLOGIST N. Yacobi										
SITE DESCRIPTION Retaining Wall No. 3 from -Y1RT- STA 29+35 to 40+54							GROUND WTR (ft)									
BORING NO. RW3_6		STATION 32+17		OFFSET 2 ft RT		ALIGNMENT -RW3-										
COLLAR ELEV. 2,589.6 ft		TOTAL DEPTH 37.3 ft		NORTHING 667,058		EASTING 819,844										
DRILL RIGHAMMER EFF./DATE GTC8255 CME-55 93%(11/24/2020)			DRILL METHOD H.S. Augers			HAMMER TYPE Automatic										
DRILLER L. Wansrath		START DATE 03/12/21		COMP. DATE 03/12/21		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2590																
	2,589.6	0.0	3	3	2										2,589.6	GROUND SURFACE
	2,587.1	2.5	10	7	5										2,587.6	ROADWAY EMBANKMENT Loose, red and brown, silty SAND (A-2-4)
2585	2,584.6	5.0	3	2	3										2,585.1	Stiff, brown and white, SILT (A-4), with trace sand
	2,582.1	7.5	1	1	1										2,582.6	ALLUVIAL Loose, gray with brown, silty SAND (A-2-4)
2580	2,579.6	10.0	1	2	2											Very soft to stiff, gray, silty CLAY (A-7-6), with trace sand, micaceous
2575	2,574.6	15.0	1	WOH	WOH											
2570	2,569.6	20.0	1	1	2											
2565	2,564.6	25.0	9	9	4											
2560	2,559.6	30.0	7	6	9											
2555	2,554.6	35.0	13	17	100/0.3											
	2,552.4	37.2	60/0.1												60/0.1	

NCDOT BORE DOUBLE B3186_GEO_SPT.GPJ_NC_DOT.GDT 8/11/21

CRYSTALLINE ROCK
Gray, GNEISS

Boring Terminated with Standard Penetration Test Refusal at Elevation 2,553.9 ft in Crystalline Rock (GNEISS). A.R. at a depth of 34.0'.

NOTES
Split spoons at 15.0' and 34.0' resulted in no recovery

WEATHERED ROCK
Brown, GNEISS

CRYSTALLINE ROCK
Brown, GNEISS

Boring Terminated with Standard Penetration Test Refusal at Elevation 2,552.3 ft in Crystalline Rock (GNEISS). A.R. at a depth of 37.2'.

NOTES
Split spoons at 25.0' and 37.2' resulted in no recovery

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 38332.1.FS1		TIP B-3186 / B-5898		COUNTY HAYWOOD		GEOLOGIST N. Yacobi									
SITE DESCRIPTION Retaining Wall No. 3 from -Y1RT- STA 29+35 to 40+54							GROUND WTR (ft)								
BORING NO. RW3_8		STATION 33+08		OFFSET CL		ALIGNMENT -RW3-									
COLLAR ELEV. 2,600.2 ft		TOTAL DEPTH 27.3 ft		NORTHING 667,094		EASTING 819,928									
DRILL RIGHAMMER EFF./DATE GTC8255 CME-55 93%(11/24/2020)				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic									
DRILLER L. Wansrath		START DATE 03/12/21		COMP. DATE 03/12/21		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
2605															
2600	2,600.2	0.0	12	6	4								D	2,600.2 GROUND SURFACE 0.0	
	2,597.7	2.5	2	2	3								D	RESIDUAL Medium stiff, red and orange, clayey SILT (A-5), with trace sand, saprolitic	
2595	2,595.2	5.0	4	7	7								D	2,598.7 Medium stiff to stiff, brown/orange, fine sandy SILT (A-4) 4.5	
	2,592.7	7.5	2	3	5								D		
2590	2,590.2	10.0	7	7	8								D		
	2,587.2	13.0											D	2,587.2 Dense, brown, red, and white, fine silty SAND (A-2-4), with trace clay, contains trace rock fragments, saprolitic 13.0	
2585	2,585.2	15.0	10	18	24								D		
	2,583.2	18.0											D	2,585.2 Medium dense, brown and white, silty SAND (A-2-4), saprolitic 18.0	
2580	2,580.2	20.0	10	11	20								D		
	2,578.2	22.5											D	2,577.7 WEATHERED ROCK 25.5	
2575	2,575.2	25.0	50	100/0.3										2,575.2 WEATHERED ROCK White and gray, migmatic GNEISS 25.0	
	2,572.9	27.3												2,572.9 WEATHERED ROCK Gray, GNEISS 27.3	
		60/0.0												Boring Terminated with Standard Penetration Test Refusal at Elevation 2,572.9 ft on Crystalline Rock (GNEISS). A.R. at a depth of 27.3'.	

WBS 38332.1.FS1		TIP B-3186 / B-5898		COUNTY HAYWOOD		GEOLOGIST N. Yacobi									
SITE DESCRIPTION Retaining Wall No. 3 from -Y1RT- STA 29+35 to 40+54							GROUND WTR (ft)								
BORING NO. RW3_9		STATION 33+56		OFFSET 1 ft RT		ALIGNMENT -RW3-									
COLLAR ELEV. 2,603.2 ft		TOTAL DEPTH 35.7 ft		NORTHING 667,113		EASTING 819,971									
DRILL RIGHAMMER EFF./DATE GTC8255 CME-55 93%(11/24/2020)				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic									
DRILLER L. Wansrath		START DATE 03/12/21		COMP. DATE 03/12/21		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
2605															
	2,603.2	0.0	5	3	4								D	2,603.2 GROUND SURFACE 0.0	
2600	2,600.7	2.5	2	3	2								D	RESIDUAL Medium stiff, red and orange, clayey SILT (A-5), with trace sand, saprolitic	
	2,598.2	5.0	3	2	3								M	2,598.7 Medium stiff to stiff, brown/orange, fine sandy SILT (A-4) 4.5	
2595	2,595.7	7.5	2	4	3								M		
	2,593.2	10.0	3	5	5								M		
2590	2,590.2	13.0	3	5	6								M		
	2,588.2	15.0	3	5	6								M		
2585	2,585.2	18.0	5	8	15								M	2,585.2 Medium dense, brown and white, silty SAND (A-2-4), saprolitic 18.0	
	2,583.2	20.0	5	8	15								M		
2580	2,580.2	25.0	32	56	65/0.5									2,577.7 WEATHERED ROCK 25.5	
	2,578.2	27.5													
2575	2,575.2	30.0	42	80	100/0.4									2,575.2 WEATHERED ROCK White and gray, migmatic GNEISS 25.0	
	2,573.2	32.5													
2570	2,570.2	35.0	50	100/0.4										2,572.9 WEATHERED ROCK Gray, GNEISS 27.3	
		60/0.0												Boring Terminated at Elevation 2,567.5 ft in Weathered Rock (GNEISS)	

NCDOT BORE DOUBLE B3186_GEO_SPT.GPJ NC_DOT.GDT 8/11/21

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 38332.1.FS1		TIP B-3186 / B-5898		COUNTY HAYWOOD		GEOLOGIST N. Yacobi									
SITE DESCRIPTION Retaining Wall No. 3 from -Y1RT- STA 29+35 to 40+54							GROUND WTR (ft)								
BORING NO. RW3_10		STATION 34+04		OFFSET CL		ALIGNMENT -RW3-									
COLLAR ELEV. 2,605.6 ft		TOTAL DEPTH 27.4 ft		NORTHING 667,135		EASTING 820,014									
DRILL RIGHAMMER EFF./DATE GTC8255 CME-55 93%(11/24/2020)				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic									
DRILLER L. Wanstrath		START DATE 03/13/21		COMP. DATE 03/13/21		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
2610															
2605	2,605.6	0.0	2	3	3								D	2,605.6 GROUND SURFACE 0.0	
	2,603.1	2.5	3	5	6								D	2,603.6 RESIDUAL Loose, red and brown, silty SAND (A-2-4) Stiff to very stiff, gray, brown, and orange, SILT (A-4), with trace sand, micaceous, saprolitic 2.9	
2600	2,600.6	5.0	6	6	9								D		
	2,598.1	7.5	3	9	16								D		
2595	2,595.6	10.0	10	5	8								D		
	2,592.6												▽	2,592.6 Medium dense to dense, brown, tan, and white, fine silty SAND (A-2-4), micaceous, saprolitic 13.0	
2590	2,590.6	15.0	5	8	12								M		
	2,585.6	20.0	4	6	10								M		
2580	2,580.6	25.0	15	17	20								M		
	2,578.2	27.4	60/0.0										M	2,578.2 Boring Terminated with Standard Penetration Test Refusal at Elevation 2,578.2 ft on Crystalline Rock (GNEISS). A.R. at a depth of 27.4'. 27.4	

WBS 38332.1.FS1		TIP B-3186 / B-5898		COUNTY HAYWOOD		GEOLOGIST N. Yacobi									
SITE DESCRIPTION Retaining Wall No. 3 from -Y1RT- STA 29+35 to 40+54							GROUND WTR (ft)								
BORING NO. RW3_11		STATION 34+52		OFFSET 3 ft RT		ALIGNMENT -RW3-									
COLLAR ELEV. 2,605.3 ft		TOTAL DEPTH 28.0 ft		NORTHING 667,153		EASTING 820,060									
DRILL RIGHAMMER EFF./DATE GTC8255 CME-55 93%(11/24/2020)				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic									
DRILLER L. Wanstrath		START DATE 03/13/21		COMP. DATE 03/13/21		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
2610															
2605	2,605.3	0.0	2	2	1								D	2,605.3 GROUND SURFACE 0.0	
	2,602.8	2.5	3	3	5								D	2,603.3 RESIDUAL Loose, red, silty SAND (A-2-4), contains trace roots 2.0	
2600	2,600.3	5.0	2	2	2								D	2,600.8 Medium stiff to stiff, red, orange, and brown, SILT (A-4) 4.5	
	2,597.8	7.5	1	0	1								M	2,598.3 Soft to medium stiff, orange and brown, silty CLAY (A-7-6) 7.0	
2595	2,595.3	10.0	2	2	3								▽	2,592.3 Very soft to medium stiff, orange and white, SILT (A-4) 13.0	
	2,592.3												W	2,592.3 Medium dense, orange, brown, and white, fine silty SAND (A-2-4), saprolitic 13.0	
2590	2,590.3	15.0	5	11	7								W		
	2,585.3	20.0	3	4	9								W		
2580	2,580.3	25.0	100/0.5											2,580.3 WEATHERED ROCK Black, gray, and orange, GNEISS 25.0	
	2,577.4	27.9	60/0.1											2,577.4 CRYSTALLINE ROCK GNEISS 27.9	
	2,577.3													Boring Terminated with Standard Penetration Test Refusal at Elevation 2,577.3 ft in Crystalline Rock (GNEISS). A.R. at a depth of 27.9'. 28.0	

NCDOT BORE DOUBLE B3186_GEO_SPT.GPJ NC_DOT.GDT 8/11/21

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 38332.1.FS1		TIP B-3186 / B-5898		COUNTY HAYWOOD		GEOLOGIST N. Yacobi											
SITE DESCRIPTION Retaining Wall No. 3 from -Y1RT- STA 29+35 to 40+54							GROUND WTR (ft)										
BORING NO. RW3_14		STATION 36+03		OFFSET CL		ALIGNMENT -RW3-											
COLLAR ELEV. 2,612.8 ft		TOTAL DEPTH 42.5 ft		NORTHING 667,228		EASTING 820,191											
DRILL RIGHAMMER EFF./DATE GTC8255 CME-55 93%(11/24/2020)			DRILL METHOD H.S. Augers			HAMMER TYPE Automatic											
DRILLER L. Wanstrath		START DATE 03/13/21		COMP. DATE 03/13/21		SURFACE WATER DEPTH N/A											
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)			
			0.5ft	0.5ft	0.5ft	0	25	50	75	100							
2615	2,612.8	0.0												2,612.8	GROUND SURFACE	0.0	
2610	2,610.3	2.5	2	2	2	4		M	RESIDUAL Very soft to medium stiff, brown and red, clayey SILT (A-5), micaceous	2,610.3			
	2,607.8	5.0	2	1	1	2		M			2,607.8		
2605	2,605.3	7.5	1	1	1	1		M			2,605.3		
	2,602.8	10.0	2	1	2	2		M			2,602.8		
2600	2,597.8	15.0	1	2	2	1		M			2,597.8		
2595	2,592.8	20.0	3	11	20	3		D		Dense, red, brown, and white, silty SAND (A-2-4), micaceous, saprolitic	2,594.8	18.0	
2590	2,587.8	25.0	4	5	10	4		M				2,589.8	23.0
2585	2,582.8	30.0	2	3	6	2		M		Stiff to very stiff, red, brown, and orange, SILT (A-4), with trace sand	2,582.8		
2580	2,577.8	35.0	6	11	17	6		M				2,577.8	
2575	2,572.8	40.0	100/0.4			100/0.4		M		WEATHERED ROCK Black and white, migmatitic GNEISS	2,572.8	40.0	
	2,570.3	42.5	60/0.0			60/0.0		M			2,570.3	42.5	
													Boring Terminated with Standard Penetration Test Refusal at Elevation 2,570.3 ft on Crystalline Rock (GNEISS). A.R. at a depth of 42.5'.				

WBS 38332.1.FS1		TIP B-3186 / B-5898		COUNTY HAYWOOD		GEOLOGIST N. Yacobi										
SITE DESCRIPTION Retaining Wall No. 3 from -Y1RT- STA 29+35 to 40+54							GROUND WTR (ft)									
BORING NO. RW3_15		STATION 36+54		OFFSET 1 ft RT		ALIGNMENT -RW3-										
COLLAR ELEV. 2,617.8 ft		TOTAL DEPTH 53.0 ft		NORTHING 667,253		EASTING 820,235										
DRILL RIGHAMMER EFF./DATE GTC8255 CME-55 93%(11/24/2020)			DRILL METHOD H.S. Augers			HAMMER TYPE Automatic										
DRILLER L. Wanstrath		START DATE 03/14/21		COMP. DATE 03/14/21		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2620	2,617.8	0.0												2,617.8	GROUND SURFACE	0.0
2615	2,615.3	2.5	2	2	3	5		D	RESIDUAL Loose, brown, silty SAND (A-2-4)	2,615.3	2.0	
	2,612.8	5.0	2	2	3	2		D			2,612.8	7.0
2610	2,610.3	7.5	2	1	2	2		M	Stiff to medium stiff, brown and red, clayey SILT (A-5)	2,610.3		
	2,607.8	10.0	2	2	2	2		M			2,607.8	
2605	2,602.8	15.0	2	2	3	2		M	Soft to very stiff, brown, red, and black, SILT (A-4), with trace sand, micaceous, saprolitic	2,602.8		
2600	2,597.8	20.0	2	3	4	2		M			2,597.8	
2595	2,592.8	25.0	7	9	16	7		M	Dense, gray and white, silty SAND (A-2-4), saprolitic	2,592.8		
2590	2,587.8	30.0	22	10	21	22		M			2,587.8	
2585	2,582.8	35.0	82	100/0.4		82		M	WEATHERED ROCK Gray, black and red, GNEISS with SILT (A-4)	2,582.8	35.0	
2580	2,577.8	40.0	20	20	25	20		M			2,577.8	38.0
2575	2,572.8	45.0	100/0.5			100/0.5		M	RESIDUAL Dense, gray and white, silty SAND (A-2-4), saprolitic	2,572.8	45.0	
2570	2,567.8	50.0	23	47	100/0.4	23		M			2,567.8	45.0
2565	2,564.9	52.9	60/0.1			60/0.1			WEATHERED ROCK Gray, black and red, GNEISS, with silt (A-4)	2,564.9	52.9	
															2,564.8	53.0
													CRYSTALLINE ROCK White and black, GNEISS Boring Terminated with Standard Penetration Test Refusal at Elevation 2,564.8 ft in Crystalline Rock (GNEISS). A.R. at a depth of 52.9'.			

NCDOT BORE DOUBLE B3186_GEO_SPT.GPJ_NC_DOT.GDT 8/11/21

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 38332.1.FS1		TIP B-3186 / B-5898		COUNTY HAYWOOD		GEOLOGIST N. Yacobi										
SITE DESCRIPTION Retaining Wall No. 3 from -Y1RT- STA 29+35 to 40+54							GROUND WTR (ft)									
BORING NO. RW3_16		STATION 37+04		OFFSET 2 ft RT		ALIGNMENT -RW3-										
COLLAR ELEV. 2,624.3 ft		TOTAL DEPTH 29.0 ft		NORTHING 667,278		EASTING 820,278										
DRILL RIGHAMMER EFF./DATE GTC8255 CME-55 93%(11/24/2020)			DRILL METHOD H.S. Augers			HAMMER TYPE Automatic										
DRILLER L. Wanstrath		START DATE 03/14/21		COMP. DATE 03/14/21		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2625	2,624.3	0.0												2,624.3	0.0	GROUND SURFACE
	2,621.8	2.5	3	3	4								D	2,621.8		RESIDUAL Loose, brown and tan, silty SAND (A-2-4)
2620	2,619.3	5.0	3	3	3								D	2,619.8	4.5	Medium stiff, brown and orange, silty CLAY (A-7-6)
	2,616.8	7.5	4	3	4								M	2,615.3	9.0	Medium stiff, light gray, clayey SILT (A-4)
2615	2,614.3	10.0	2	2	3								M	2,611.3	13.0	Soft to medium stiff, red, brown, and black, SILT (A-4), with trace sand, micaceous
2610	2,609.3	15.0	1	2	2								M	2,601.3	23.0	Medium dense, red, brown, and tan, silty SAND (A-2-4), micaceous, saprolitic
2605	2,604.3	20.0	2	2	4								M			
2600	2,599.3	25.0	6	9	14								M			
	2,595.3	29.0													29.0	Boring Terminated with Standard Penetration Test Refusal at Elevation 2,595.3 ft on Crystalline Rock (GNEISS). A.R. at a depth of 29.0'.

WBS 38332.1.FS1		TIP B-3186 / B-5898		COUNTY HAYWOOD		GEOLOGIST N. Yacobi										
SITE DESCRIPTION Retaining Wall No. 3 from -Y1RT- STA 29+35 to 40+54							GROUND WTR (ft)									
BORING NO. RW3_17		STATION 37+55		OFFSET 3 ft RT		ALIGNMENT -RW3-										
COLLAR ELEV. 2,628.8 ft		TOTAL DEPTH 36.3 ft		NORTHING 667,305		EASTING 820,322										
DRILL RIGHAMMER EFF./DATE GTC8255 CME-55 93%(11/24/2020)			DRILL METHOD H.S. Augers			HAMMER TYPE Automatic										
DRILLER L. Wanstrath		START DATE 03/14/21		COMP. DATE 03/14/21		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2630	2,628.8	0.0												2,628.8	0.0	GROUND SURFACE
	2,626.3	2.5	2	5	4								D	2,624.3		RESIDUAL Loose, brown and black, silty SAND (A-2-4)
2625	2,623.8	5.0	3	2	2								D	2,621.8	4.5	Medium stiff, brown and tan, SILT (A-4), micaceous
	2,621.3	7.5	2	3	2								M	2,620.8	7.0	Brown and gray, silty CLAY (A-7-6), contains few rock fragments, micaceous
2620	2,618.8	10.0	2	3	97/0.3								M	2,619.3	9.5	WEATHERED ROCK Gray, BOULDER
	2,618.8	10.0	2	2	2								W			RESIDUAL Soft to very stiff, gray, orange, and black, clayey SILT (A-5), with trace sand, micaceous, saprolitic
2615	2,613.8	15.0	1	2	2								W			
2610	2,608.8	20.0	2	1	2								W			
2605	2,603.8	25.0	1	2	3								W			
2600	2,598.8	30.0	3	5	11								W			
2595	2,593.8	35.0	58	100/0.3									W			
	2,593.8	35.0													35.0	WEATHERED ROCK Brown and orange, GNEISS Boring Terminated at Elevation 2,592.5 ft in Weathered Rock (GNEISS)

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 38332.1.FS1		TIP B-3186 / B-5898		COUNTY HAYWOOD		GEOLOGIST R. Dugger										
SITE DESCRIPTION Retaining Wall No. 3 from -Y1RT- STA 29+35 to 40+54							GROUND WTR (ft)									
BORING NO. RW3_22		STATION 40+12		OFFSET 3 ft RT		ALIGNMENT -RW3-										
COLLAR ELEV. 2,641.6 ft		TOTAL DEPTH 26.5 ft		NORTHING 667,437		EASTING 820,542										
DRILL RIGHAMMER EFF./DATE GTC8255 CME-55 93%(11/24/2020)				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic										
DRILLER L. Wansrath		START DATE 03/24/21		COMP. DATE 03/24/21		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2645																
2640	2,641.6	0.0	4	4	4											
	2,639.1	2.5	7	8	9											
	2,636.6	5.0	3	4	5											
2635	2,634.1	7.5	2	3	3											
	2,631.6	10.0	3	4	4											
2630	2,626.6	15.0	3	3	5											
2625	2,621.6	20.0	2	2	4											
2620	2,616.6	25.0	2	3	6											

WBS 38332.1.FS1		TIP B-3186 / B-5898		COUNTY HAYWOOD		GEOLOGIST N. Yacobi										
SITE DESCRIPTION Retaining Wall No. 12 from -Y1RT- STA 40+54 to 44+26							GROUND WTR (ft)									
BORING NO. RW3_24		STATION 47+43		OFFSET 4 ft LT		ALIGNMENT -RW12-										
COLLAR ELEV. 2,649.6 ft		TOTAL DEPTH 15.0 ft		NORTHING 667,487		EASTING 820,630										
DRILL RIGHAMMER EFF./DATE GTC3277 CME-75 83%(09/15/2020)				DRILL METHOD H.S. Augers		HAMMER TYPE Automatic										
DRILLER K. Boone		START DATE 02/17/21		COMP. DATE 02/17/21		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
2650																
	2,648.7	0.9	4	6	7											
	2,646.1	3.5	4	3	4											
2645	2,643.6	6.0	3	4	5											
	2,641.1	8.5	2	4	4											
2640	2,636.1	13.5	2	2	4											
2635																

NCDOT BORE DOUBLE B3186_GEO_SPT.GPJ NC_DOT.GDT 8/11/21