
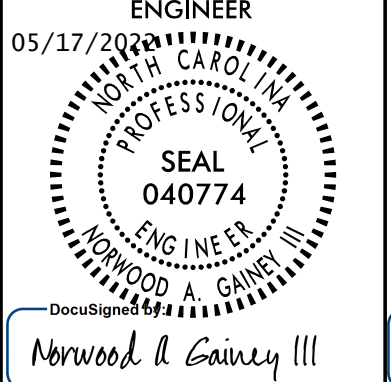
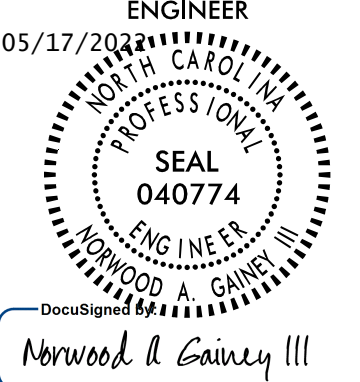


PAVEMENT SCHEDULE

PROJECT REFERENCE NO. U-6223	SHEET NO. 2A-1
ROADWAY DESIGN ENGINEER 05/17/2022 	PAVEMENT DESIGN ENGINEER 05/17/2022 
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD.	E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YARD.	S1	PROPOSED 5' x 4" CONCRETE SIDEWALK
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD. IN EACH OF TWO LAYERS.	E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YARD PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3" OR GREATER THAN 5.5" IN DEPTH.	T	EARTH MATERIAL.
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YARD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT TO EXCEED 2" DEPTH.	R1	PROPOSED 1'-6" CONCRETE CURB AND GUTTER	U	EXISTING PAVEMENT.
D1	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YARD.	R2	PROPOSED 2'-6" CONCRETE CURB AND GUTTER	W1	VARIABLE DEPTH ASPHALT PAVEMENT (SEE STANDARD WEDGING DETAIL)
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YARD PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 2.5" OR GREATER THAN 4" IN DEPTH.	R3	PROPOSED PRECAST REINFORCED CONCRETE BARRIER 41" SINGLE FACED (STD. 857.01)	NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.	


USE TYPICAL SECTION NO. 1A IN CONJUNCTION WITH TYPICAL SECTIONS NO. 1
-L- STA 17+60.03 TO -L- STA 21+46.50 LEFT

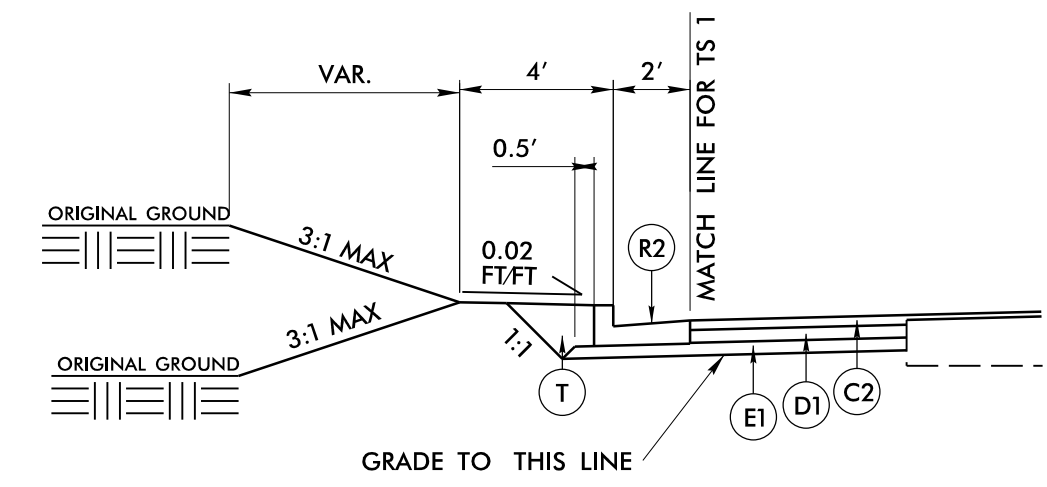

TYPICAL SECTION NO. 1A

VAR. TOTAL SHOULDER (LT & RT)
8' TO 4'
-L- 24+00 TO 25+00
-Y1- 15+50 TO 16+50

VAR. PAVED SHOULDER (LT & RT)
4' TO 0'
-L- 24+00 TO 25+00
-Y1- 15+50 TO 16+50

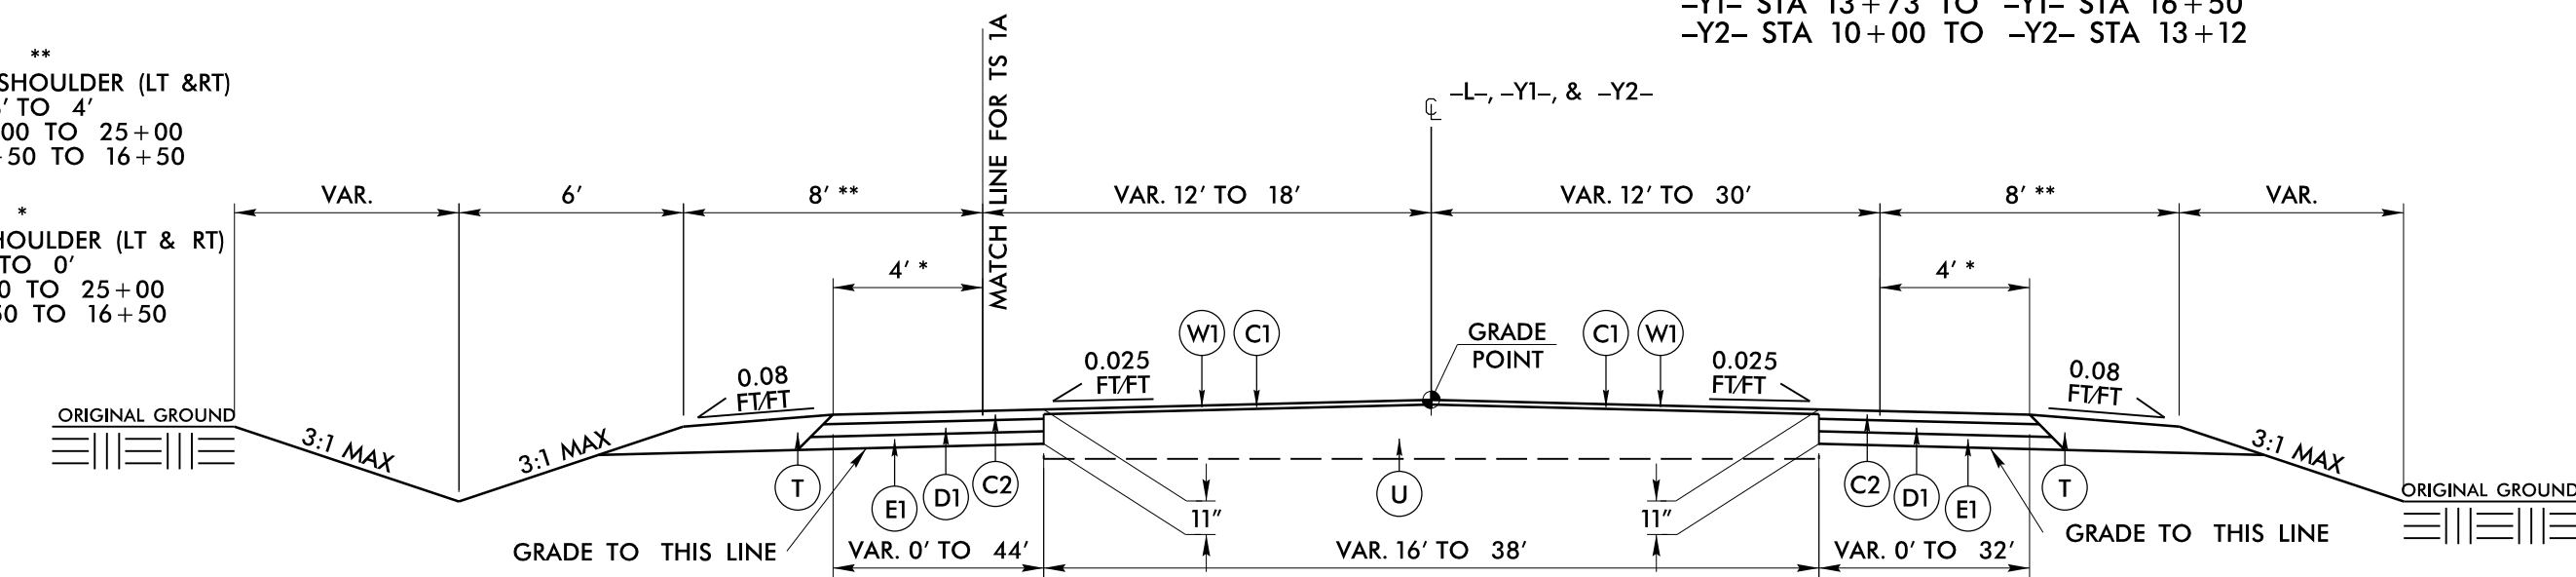


TYPICAL SECTION NO. 1


USE TYPICAL SECTION NO. 2
-L- STA 40+10 TO -L- STA 44+74

VAR. TOTAL SHOULDER (LT & RT)
8' TO 3'
-L- 40+10 TO 41+10

VAR. PAVED SHOULDER (LT & RT)
5' TO 0'
-L- 40+10 TO 41+10

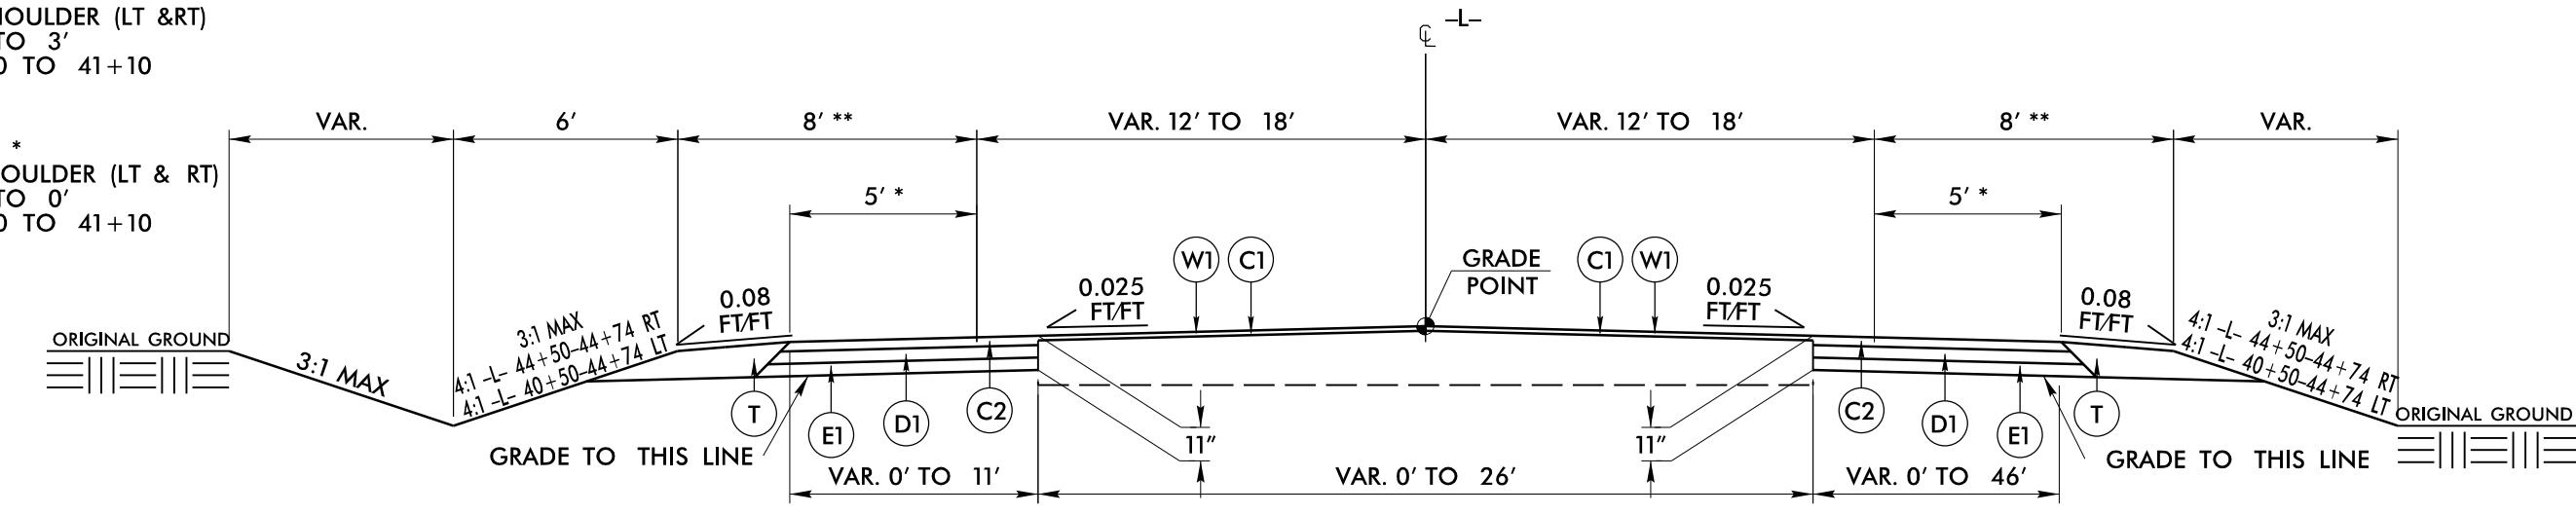


TYPICAL SECTION NO. 2

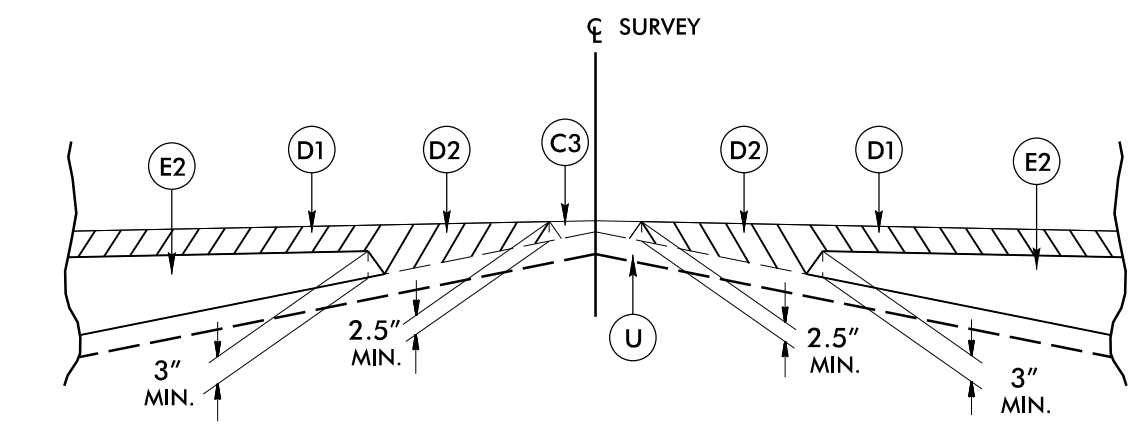

Detail Showing Method of Wedging 1

USE TYPICAL SECTION NO. 3
-L- STA 44+74 TO -L- STA 54+68.5
-Y1- STA 10+30 TO -Y1- STA 13+73
-Y2- STA 13+12 TO -Y2- STA 15+72

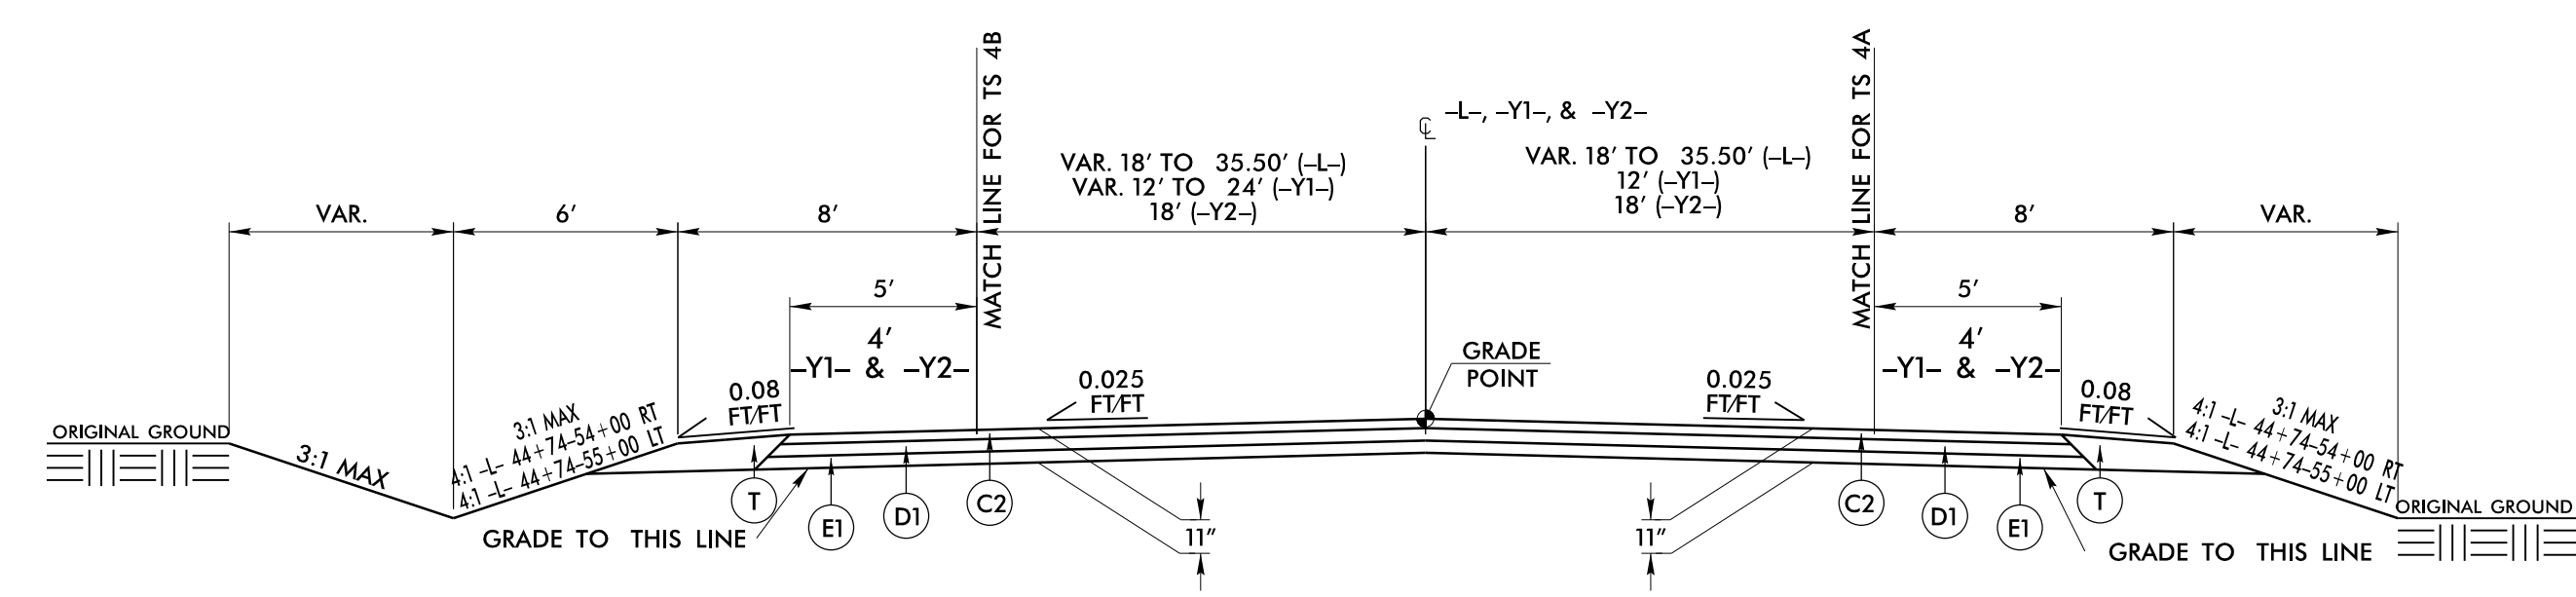

TYPICAL SECTION NO. 3

REVISIONS

6/2/99

26-APR-2022 13:51
R:\Roadway\Projects\U-6223\cde4_TYP.dgn
Revision 4 DDC