





PLAN VIEW
N.T.S.

 GEOTEXTILE FOR EMBANKMENT STABILIZATION (GES)
 GEOTEXTILE FOR SOIL STABILIZATION (GSS)




TYPICAL A-A SECTION
NOT TO SCALE

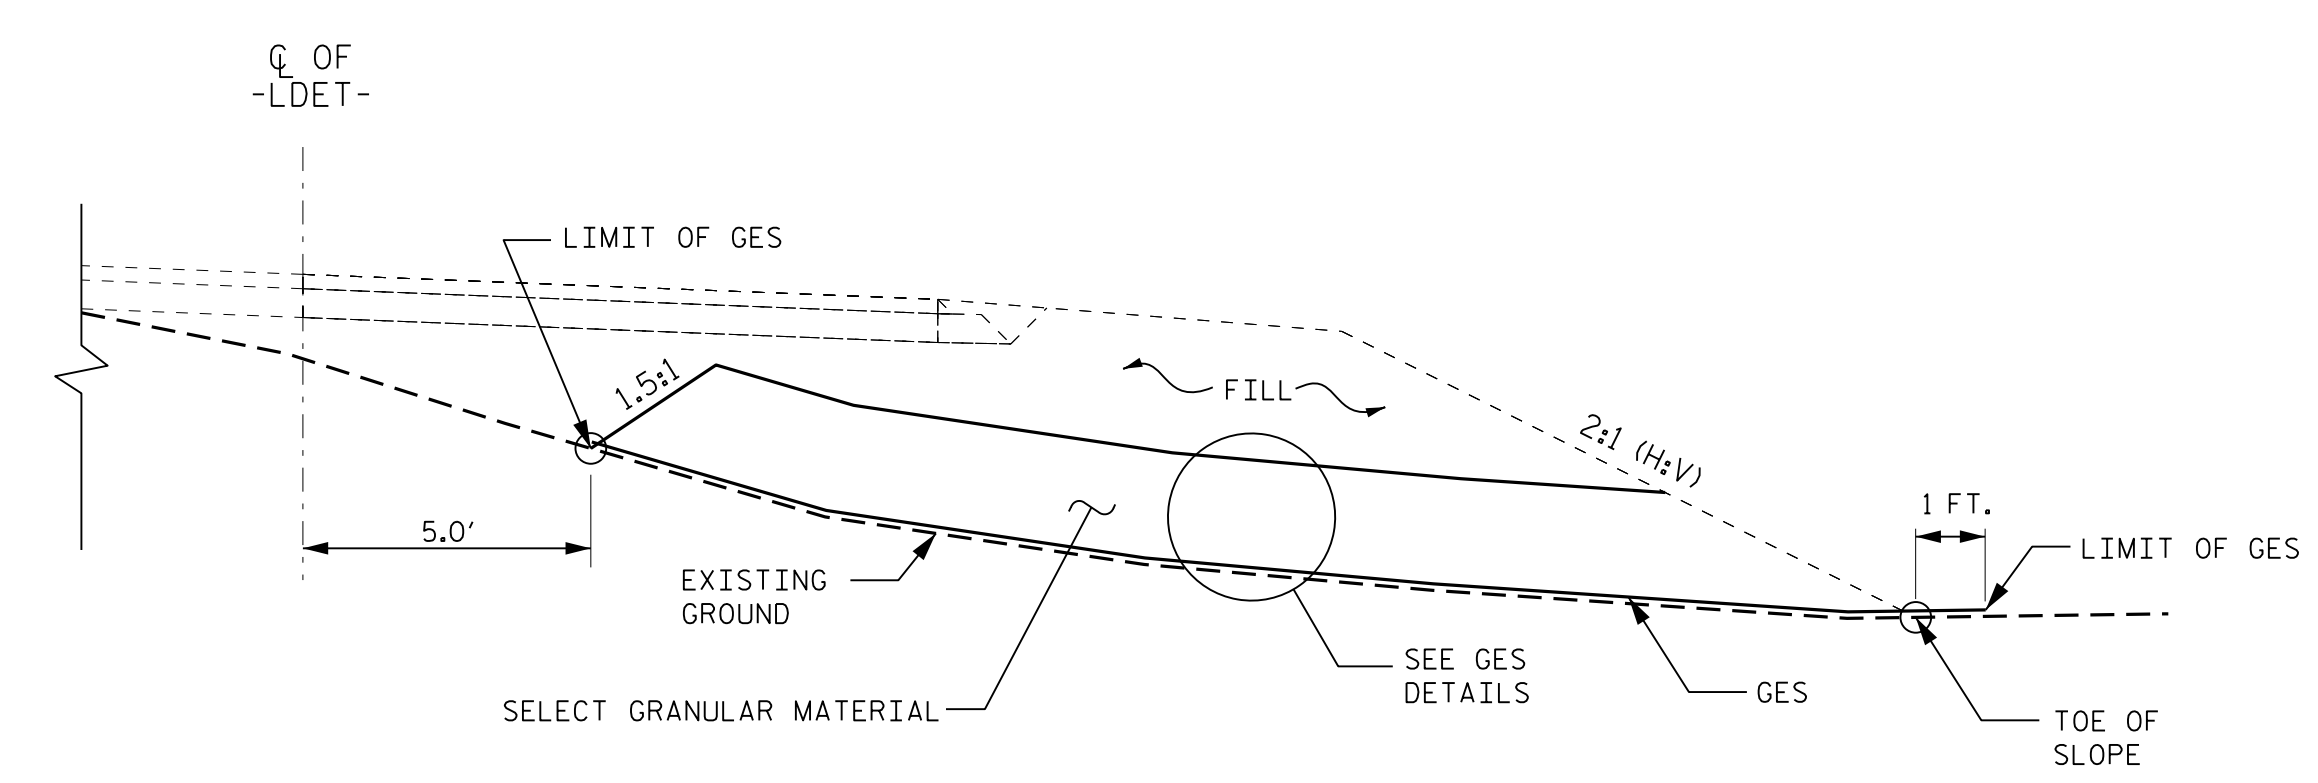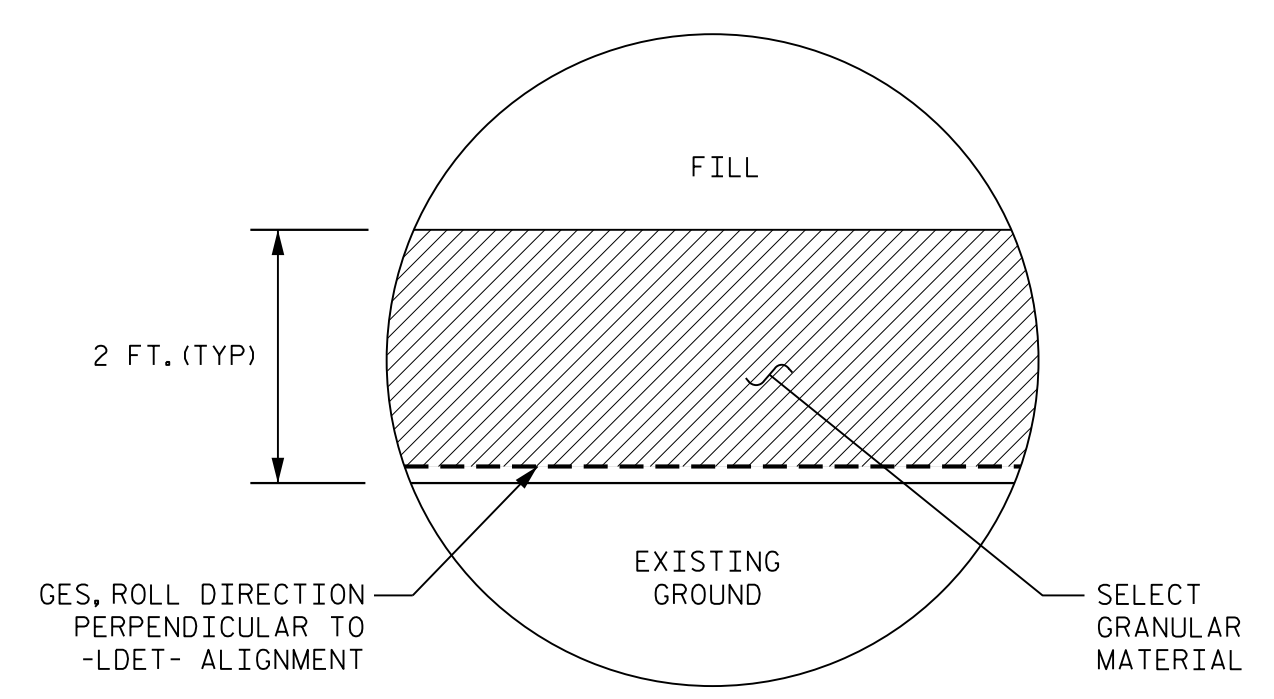


GES DETAILS
N.T.S.

NOTES

- GRUBBING MAY NOT BE REQUIRED IN AREAS WHERE GEOTEXTILE FOR EMBANKMENT STABILIZATION (GES) OR GEOTEXTILES FOR SOIL STABILIZATION (GSS) IS USED.
- CLEAR THE AREA WITHIN THE LIMITS OF GES AND GSS.
- PLACE GES AND GSS PERPENDICULAR TO -LDET- ALIGNMENT ON THE EXISTING GROUND AS SHOWN IN THE PLAN OR AS DIRECTED BY THE ENGINEER.
- PLACE THE GEOTEXTILE WITHOUT ANY WRINKLES OR CREASES.
- PLACE 2 FT. OF SELECT GRANULAR MATERIAL ON THE GES.
- THE TERMS ROLL AND MACHINE DIRECTION ARE USED INTERCHANGEABLY.
- NO SEAMS OR JOINTS ARE ALLOWED IN THE MACHINE DIRECTION OF GEOTEXTILE.
- ALL JOINTS IN THE CROSS MACHINE DIRECTION MUST BE OVERLAPPED A MINIMUM OF 18 INCHES.
- FOR GES, SEE GEOTEXTILE FOR EMBANKMENT STABILIZATION (SPECIAL) PROVISION.

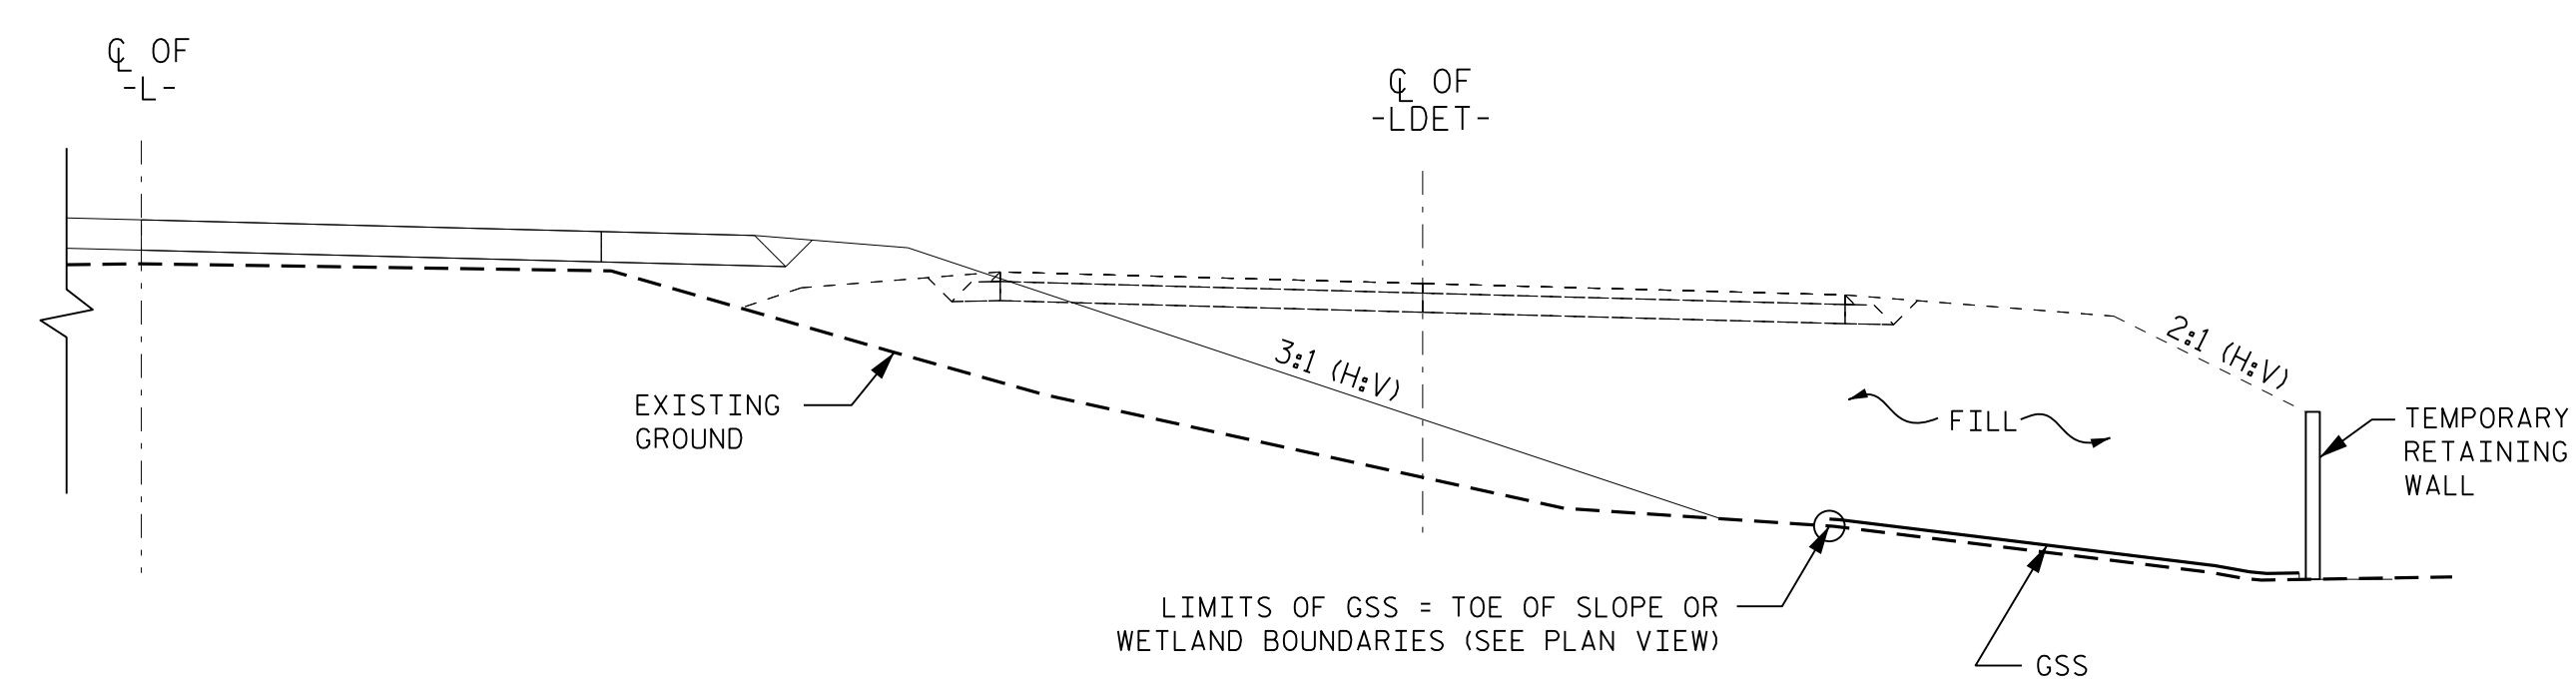


TYPICAL B-B SECTION
NOT TO SCALE

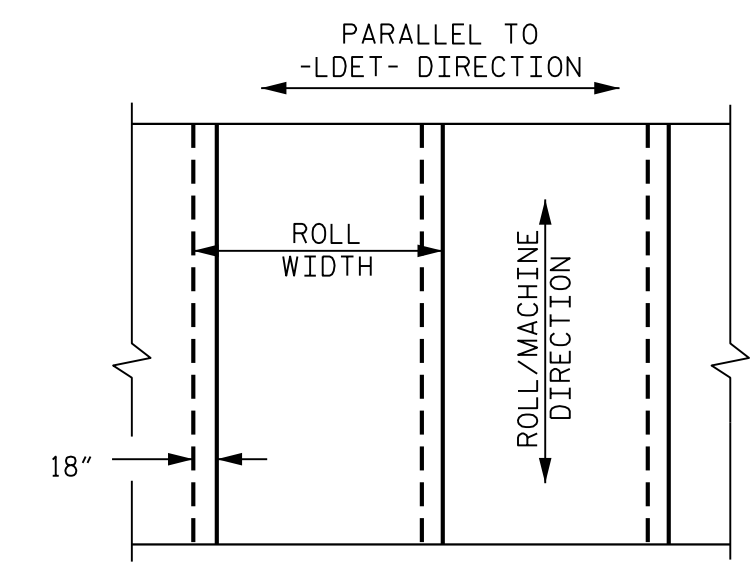

GES AND GSS OVERLAP DETAILS
(PLAN VIEW, NOT TO SCALE)

ESTIMATED QUANTITIES	
GEOTEXTILE FOR EMBANKMENT STABILIZATION	550 SY
GEOTEXTILE FOR SOIL STABILIZATION	650 SY
SELECT GRANULAR MATERIAL	350 CY

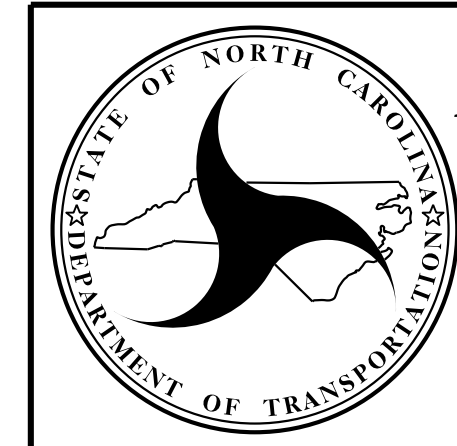

REVISIONS					
NO.	BY	DATE	NO.	BY	DATE
1	J. PARK	06/2019	3		
2			4		