

REFERENCE: B-4593

PROJECT: 38422

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

COUNTY PAMLICO
PROJECT DESCRIPTION BRIDGE NO. 38 ON -L- (NC 55)
OVER TRENT CREEK

CONTENTS

<u>SHEET NO.</u>	<u>DESCRIPTION</u>
1	TITLE SHEET
2	LEGEND (SOIL & ROCK)
3	SITE PLAN
4-5	PROFILES
6-9	BORE LOGS

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	B-4593	1	9

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

- NOTES:
- THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
 - BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

PERSONNEL

C.J. CORNETTE
S.N. ZIMARINO
R.E. SMITH
J.M. EDMONDSON

INVESTIGATED BY T.C. BOTTOMS
DRAWN BY T.C. BOTTOMS
CHECKED BY D.N. ARGENBRIGHT
SUBMITTED BY D.N. ARGENBRIGHT
DATE JUNE 2018




DocuSigned by:
Tyler C. Bottoms 10/10/2018
48A2D3BD08684848 SIGNATURE DATE

**DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED**

**NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT
SUBSURFACE INVESTIGATION
SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS**

SOIL DESCRIPTION										GRADATION										ROCK DESCRIPTION										TERMS AND DEFINITIONS																			
SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (AASHTO T 206, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6										WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORMLY GRADED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.										HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED, AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:										ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLODGED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SRQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.																			
SOIL LEGEND AND AASHTO CLASSIFICATION										MINERALOGICAL COMPOSITION										WEATHERING																													
GENERAL CLASS. GRANULAR MATERIALS (<= 35% PASSING #200) SILT-CLAY MATERIALS (> 35% PASSING #200) ORGANIC MATERIALS										MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.										FRESH ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE.																													
GROUP CLASS. A-1, A-2, A-3, A-4, A-5, A-6, A-7, A-1-A-2, A-4-A-5, A-6-A-7										COMPRESSION										VERY SLIGHT (V SL.) ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN, CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE.																													
SYMBOL										SLIGHTLY COMPRESSIBLE LL < 31 MODERATELY COMPRESSIBLE LL = 31 - 50 HIGHLY COMPRESSIBLE LL > 50										SLIGHT (SLI.) ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS.																													
% PASSING #10 #40 #200										PERCENTAGE OF MATERIAL										MODERATE (MOD.) SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK.																													
MATERIAL PASSING #40 LL PI										ORGANIC MATERIAL GRANULAR SOILS SILT - CLAY SOILS OTHER MATERIAL										SEVERE (MOD. SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. IF TESTED, WOULD YIELD SPT REFUSAL																													
GROUP INDEX										GROUND WATER										SEVERE (SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. IF TESTED, WOULD YIELD SPT N VALUES > 100 BPF																													
USUAL TYPES OF MAJOR MATERIALS										WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING										VERY SEVERE (V SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE THAT ONLY MINOR VESTIGES OF ORIGINAL ROCK FABRIC REMAIN. IF TESTED, WOULD YIELD SPT N VALUES < 100 BPF																													
GEN. RATING AS SUBGRADE										STATIC WATER LEVEL AFTER 24 HOURS										COMPLETE ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.																													
PI OF A-7-5 SUBGROUP IS <= LL - 30 + PI OF A-7-6 SUBGROUP IS > LL - 30										PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA										ROCK HARDNESS																													
CONSISTENCY OR DENSENESS										MISCELLANEOUS SYMBOLS										VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.																													
PRIMARY SOIL TYPE COMPACTNESS OR CONSISTENCY RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE) RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)										ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRED SOIL BOUNDARY INFERRED ROCK LINE ALLUVIAL SOIL BOUNDARY										HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.																													
GENERALY GRANULAR MATERIAL (NON-COHESIVE) GENERALY SILT-CLAY MATERIAL (COHESIVE)										DIP & DIP DIRECTION OF ROCK STRUCTURES SPT DMT VST PMT TEST BORING AUGER BORING CORE BORING MONITORING WELL PIEZOMETER INSTALLATION										MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.																													
U.S. STD. SIEVE SIZE OPENING (MM)										RECOMMENDATION SYMBOLS										MEDIUM HARD CAN BE GROVED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.																													
BOULDER (BLDR.) COBBLE (COB.) GRAVEL (GR.) COARSE SAND (CSE. SD.) FINE SAND (F SD.) SILT (SL.) CLAY (CL.)										UNDERCUT SHALLOW UNDERCUT UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK										SOFT CAN BE GROVED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.																													
GRAIN SIZE MM IN.										ABBREVIATIONS										VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.																													
SOIL MOISTURE - CORRELATION OF TERMS										AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - CONE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST e - VOID RATIO F - FINE FOSS. - FOSSILIFEROUS FRAC. - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HI. - HIGHLY										MED. - MEDIUM MICA - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITE SD. - SAND, SANDY SL. - SILT, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT v - VERY										FRACTURE SPACING										BEDDING									
SOIL MOISTURE SCALE (ATTERBERG LIMITS) FIELD MOISTURE DESCRIPTION GUIDE FOR FIELD MOISTURE DESCRIPTION										VST - VANE SHEAR TEST WE. - WEATHERED UNIT WEIGHT UNIT WEIGHT										VERY WIDE MORE THAN 10 FEET										VERY THICKLY BEDDED 4 FEET																			
LL LIQUID LIMIT (SAT.) USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE										SAMPLE ABBREVIATIONS S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACTED TRIAXIAL CBR - CALIFORNIA BEARING RATIO										WIDE 3 TO 10 FEET										THICKLY BEDDED 1.5 - 4 FEET																			
- WET - (W) SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE										DRILL UNITS: ADVANCING TOOLS: HAMMER TYPE: AUTOMATIC MANUAL										MODERATELY CLOSE 1 TO 3 FEET										THINLY BEDDED 0.16 - 1.5 FEET																			
- MOIST - (M) SOLID; AT OR NEAR OPTIMUM MOISTURE										CME-45C CLAY BITS 6" CONTINUOUS FLIGHT AUGER 8" HOLLOW AUGERS HARD FACED FINGER BITS TUNG.-CARBIDE INSERTS CASING w/ ADVANCER TRICONE 2 1/8" STEEL TEETH TRICONE TUNG.-CARB. CORE BIT										CLOSE 0.16 TO 1 FOOT										VERY THINLY BEDDED 0.03 - 0.16 FEET																			
- DRY - (D) REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE										PORTABLE HOIST										VERY CLOSE LESS THAN 0.16 FEET										THICKLY LAMINATED 0.008 - 0.03 FEET																			
PLASTICITY										EQUIPMENT USED ON SUBJECT PROJECT										INDURATION																													
NON PLASTIC SLIGHTLY PLASTIC MODERATELY PLASTIC HIGHLY PLASTIC										HAND TOOLS: POST HOLE DIGGER HAND AUGER SOUNDING ROD VANE SHEAR TEST PUSH PROBE										FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC. RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.																													
PLASTICITY INDEX (PI) DRY STRENGTH																				FRIABLE																													
0-5 VERY LOW 6-15 SLIGHT 16-25 MEDIUM 26 OR MORE HIGH																				MODERATELY INDURATED																													
COLOR																				INDURATED																													
DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.																				EXTREMELY INDURATED																													

SKEW = 90° 19

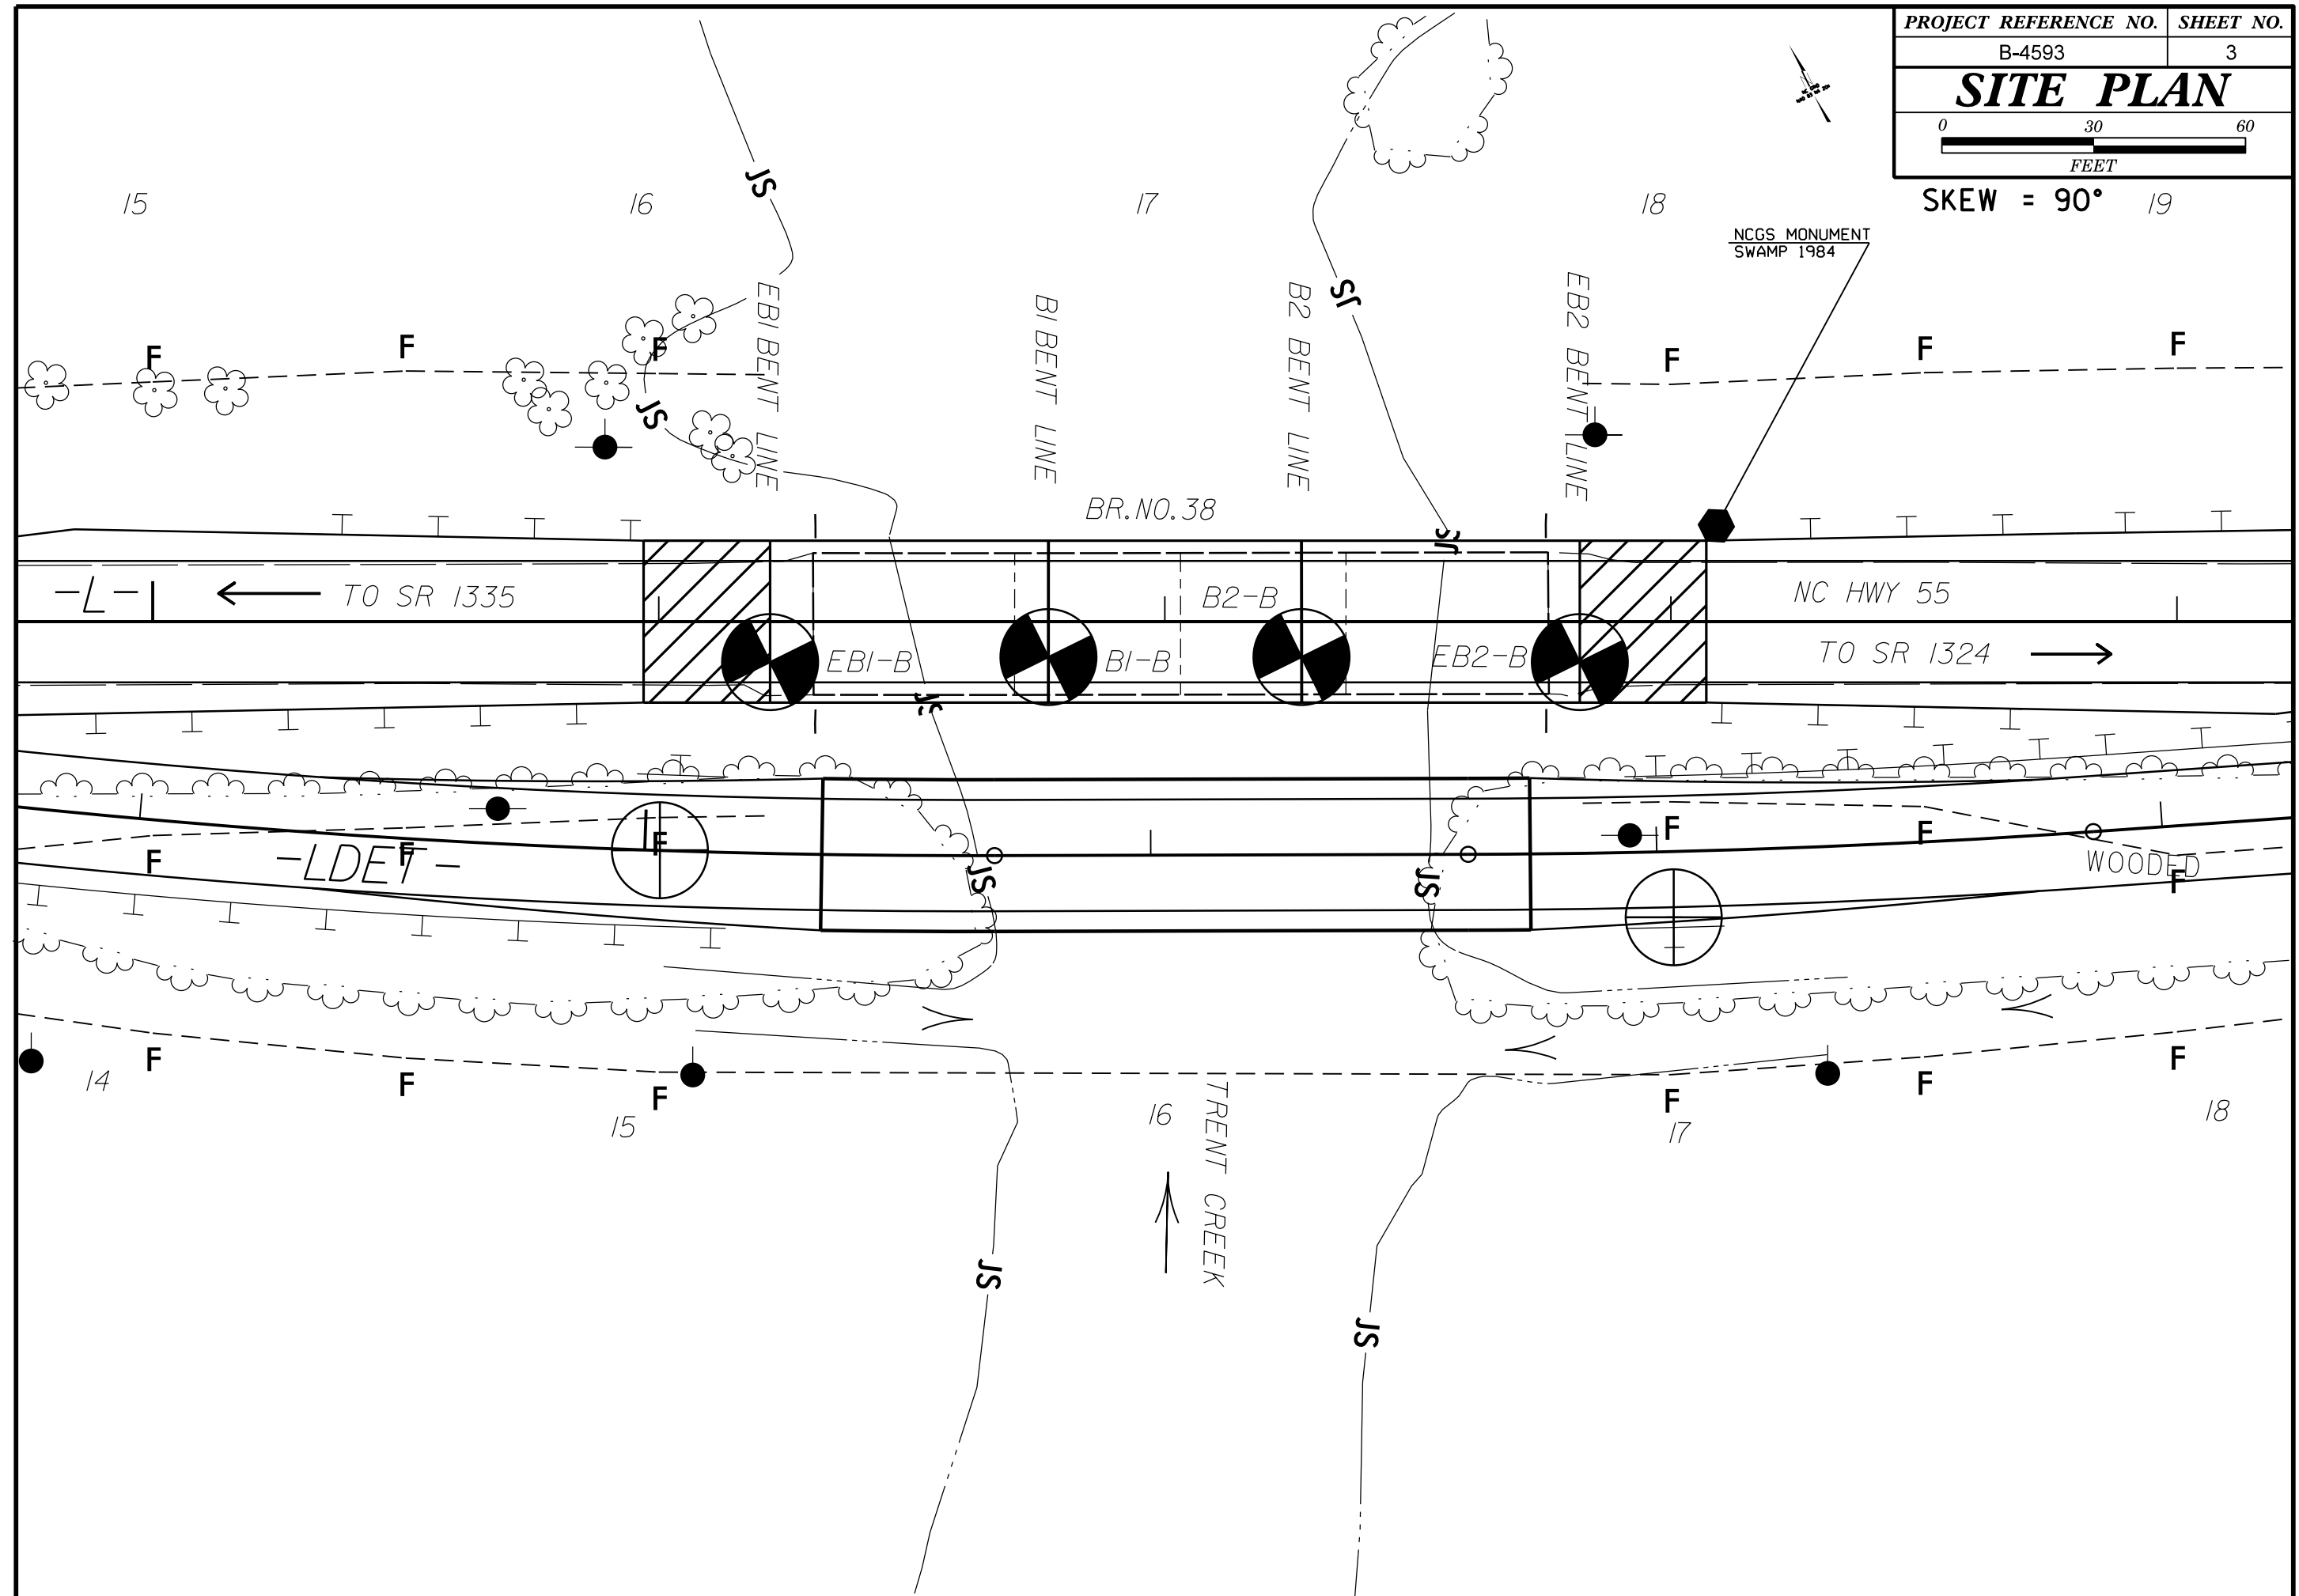


5/14/99
 14-JUN-2018 13:18
 S:\ERDC\Greenville_Investigation\TIP\B4593_GEO\BRDG0038\CADD_GEO\TECH\Plan\Pr of \B4593_GEO_BRDG.pfl.dgn

VE=2

PROJECT REFERENCE NO. B-4593	SHEET NO. 4
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
INCOMPLETE PLANS DO NOT USE FOR R/W ACQUISITION	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

PROFILE THROUGH BORINGS PROJECTED ALONG -L-

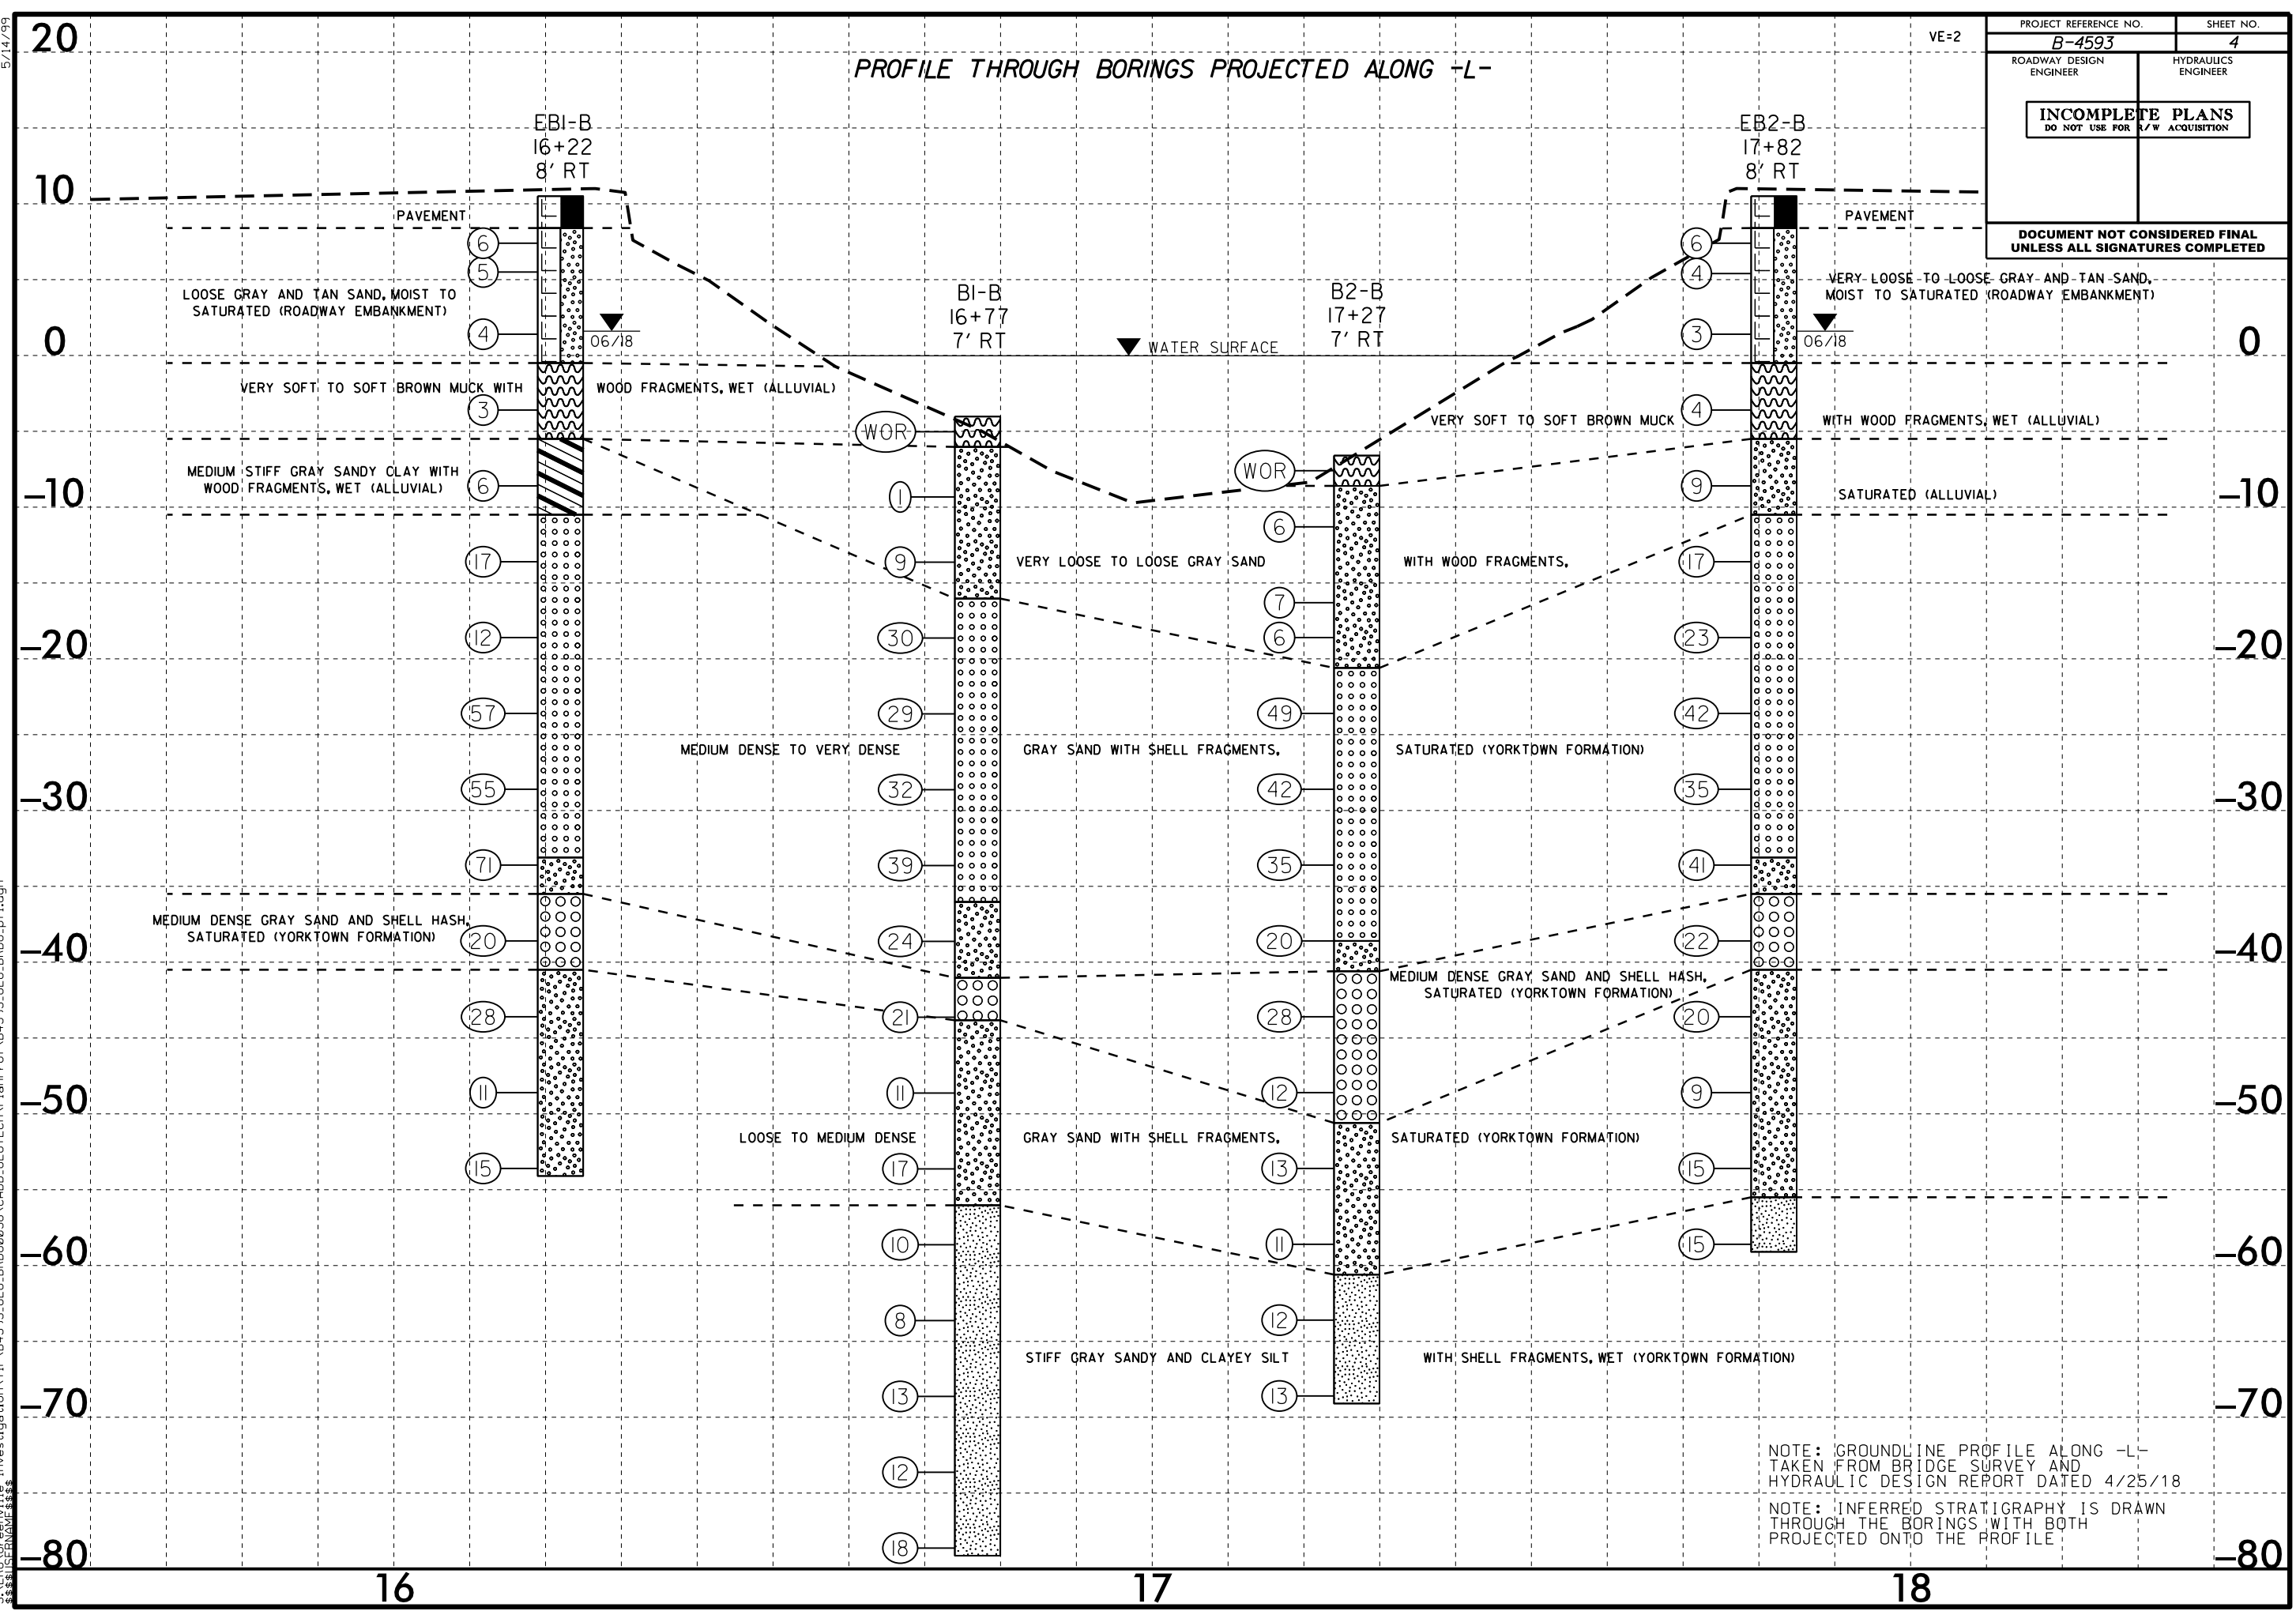


NOTE: GROUNDLINE PROFILE ALONG -L- TAKEN FROM BRIDGE SURVEY AND HYDRAULIC DESIGN REPORT DATED 4/25/18
 NOTE: INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS WITH BOTH PROJECTED ONTO THE PROFILE

5/14/99

VE=2

PROJECT REFERENCE NO. B-4593	SHEET NO. 5
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER
INCOMPLETE PLANS DO NOT USE FOR R/W ACQUISITION	
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

PROFILE THROUGH BORINGS PROJECTED ALONG -LDET-

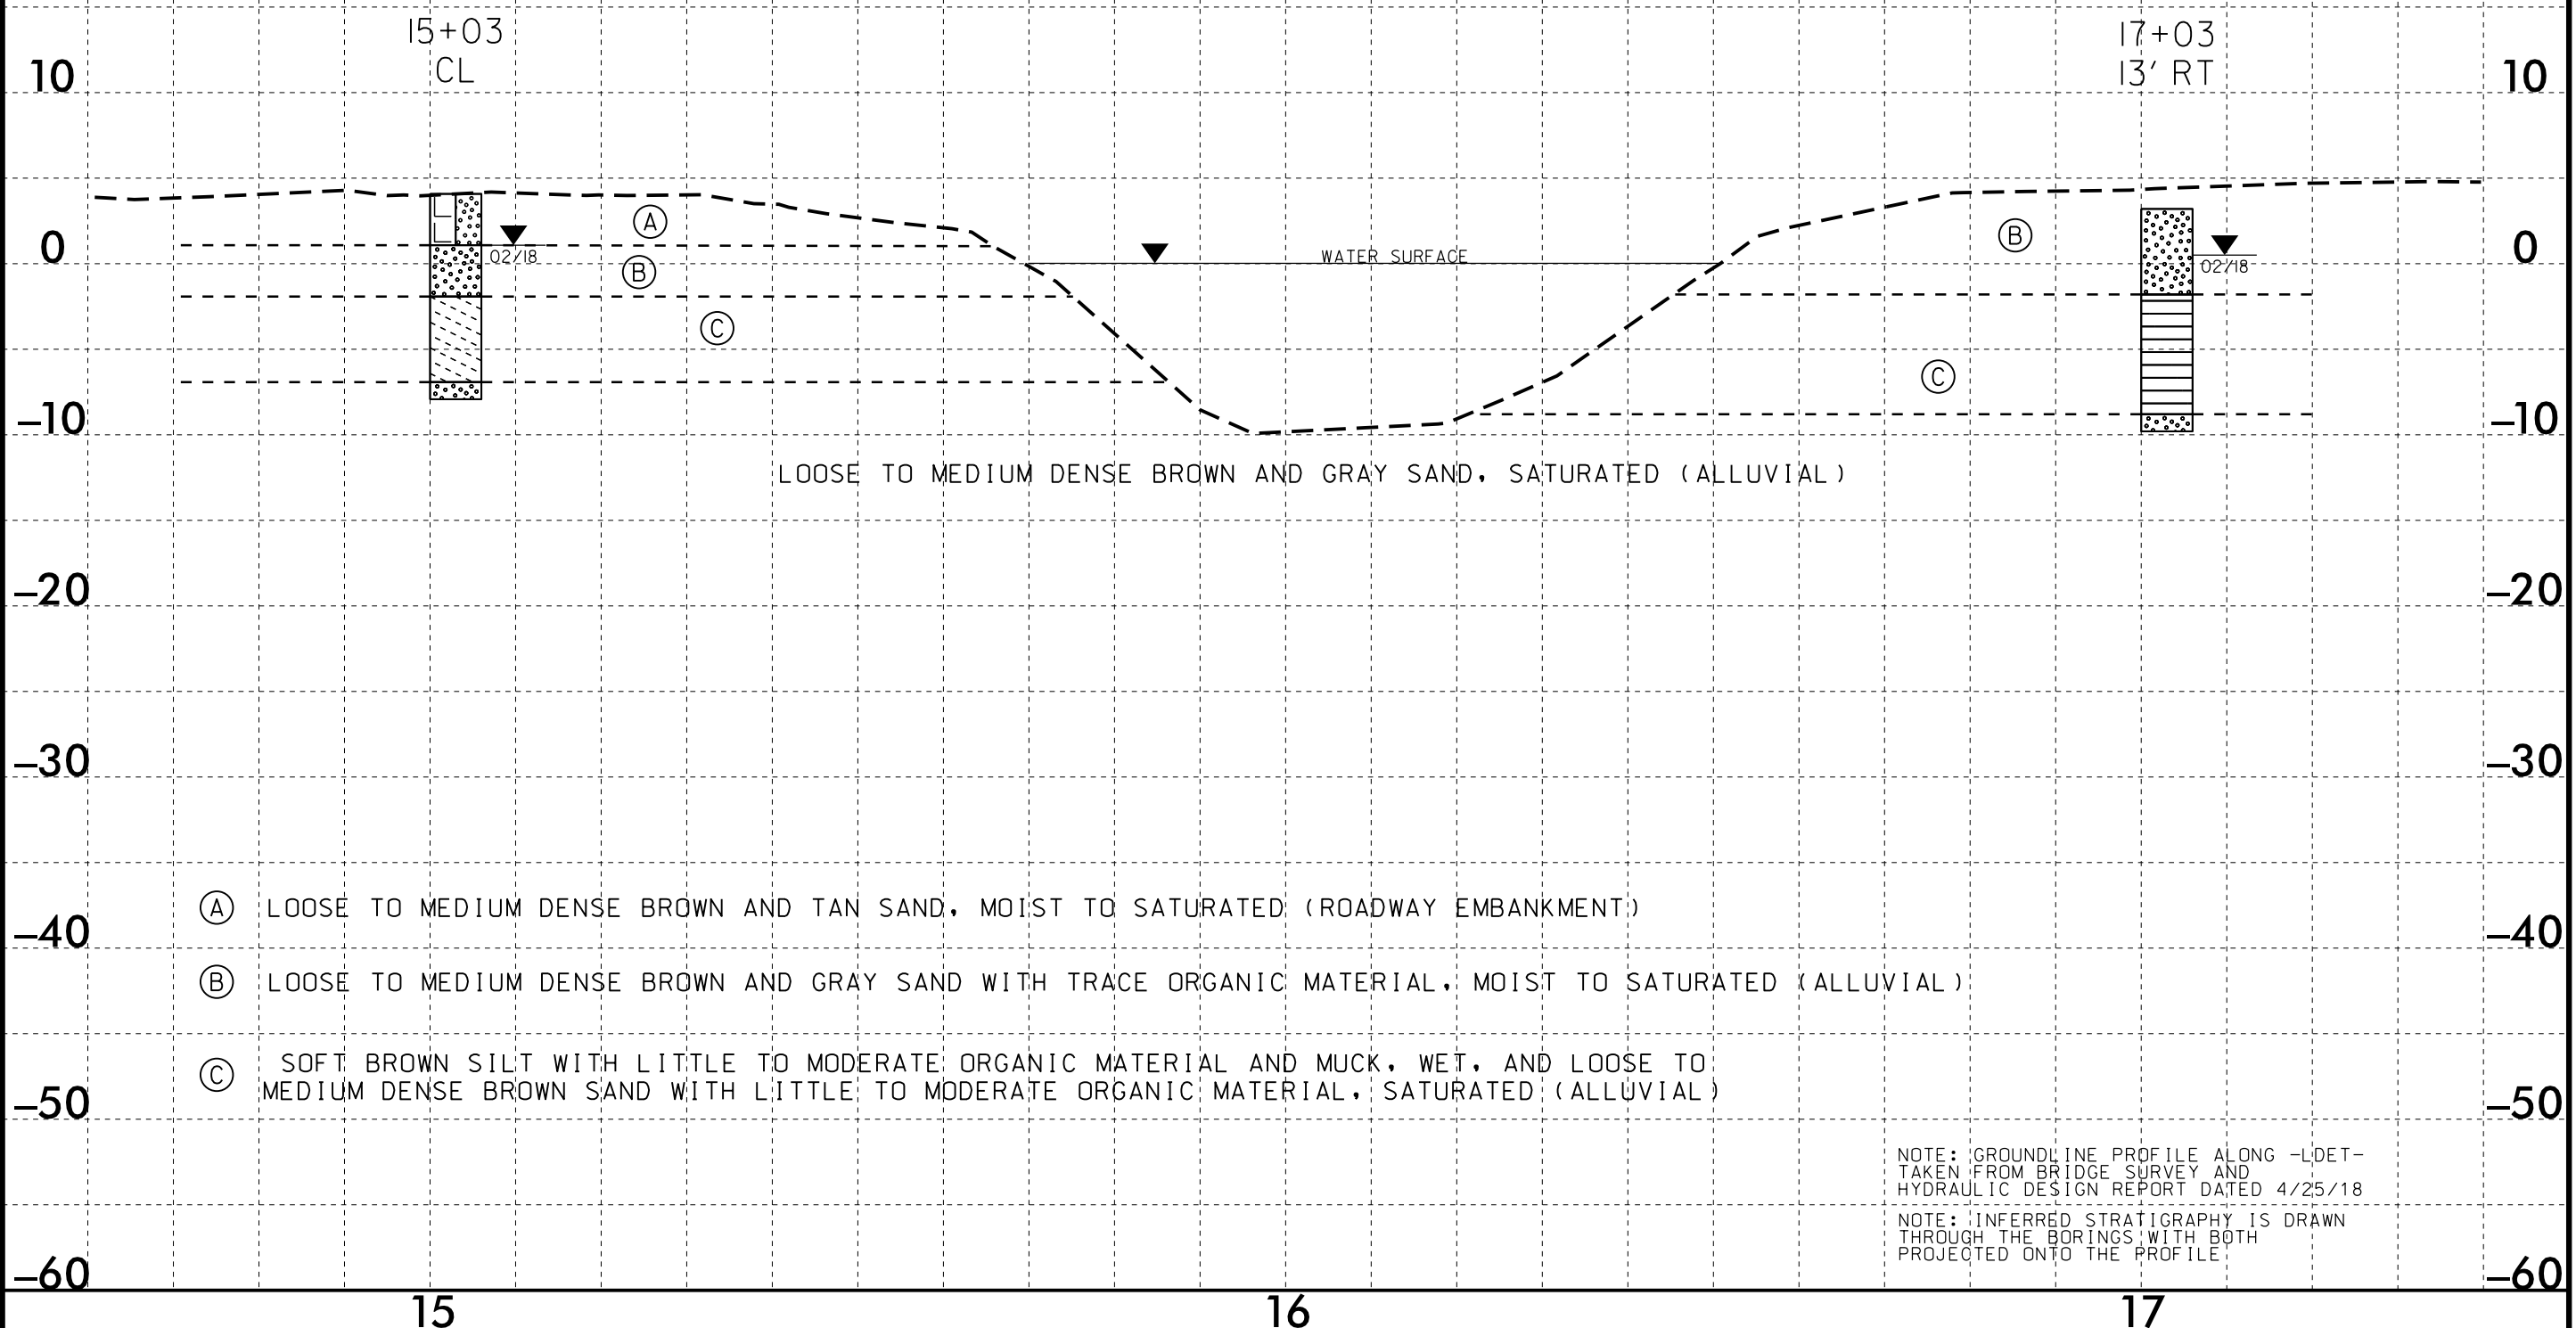

15+03
CL

17+03
13' RT

10

10

0

0

-10

-10

-20

-20

-30

-30

-40

-40

-50

-50

-60

-60

15

16

17

LOOSE TO MEDIUM DENSE BROWN AND GRAY SAND, SATURATED (ALLUVIAL)

- (A) LOOSE TO MEDIUM DENSE BROWN AND TAN SAND, MOIST TO SATURATED (ROADWAY EMBANKMENT)
- (B) LOOSE TO MEDIUM DENSE BROWN AND GRAY SAND WITH TRACE ORGANIC MATERIAL, MOIST TO SATURATED (ALLUVIAL)
- (C) SOFT BROWN SILT WITH LITTLE TO MODERATE ORGANIC MATERIAL AND MUCK, WET, AND LOOSE TO MEDIUM DENSE BROWN SAND WITH LITTLE TO MODERATE ORGANIC MATERIAL, SATURATED (ALLUVIAL)

NOTE: GROUNDLINE PROFILE ALONG -LDET- TAKEN FROM BRIDGE SURVEY AND HYDRAULIC DESIGN REPORT DATED 4/25/18

NOTE: INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS WITH BOTH PROJECTED ONTO THE PROFILE

I4-JUN-2018 10:37 S:\ERDC\resville\Investigation\TIP\B4593_GEO.BROG0038\CADD\GEO\TECH\Plan\Prof\B4593_GEO.BROG.pfl_DET.lydgn

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 38422.1.2	TIP B-4593	COUNTY PAMLICO	GEOLOGIST Cornette, C. J.
SITE DESCRIPTION BRIDGE NUMBER 38 ON -L- (NC 55) OVER TRENT CREEK			GROUND WTR (ft)
BORING NO. EB1-B	STATION 16+22	OFFSET 8 ft RT	ALIGNMENT -L-
COLLAR ELEV. 10.5 ft	TOTAL DEPTH 64.6 ft	NORTHING 500,790	EASTING 2,682,312
DRILL RIG/HAMMER EFF./DATE GFO0075 CME-45C 84% 08/21/2017		DRILL METHOD Mud Rotary	HAMMER TYPE Automatic
DRILLER Smith, R. E.	START DATE 06/04/18	COMP. DATE 06/04/18	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100			ELEV. (ft)	DEPTH (ft)	
15															
														10.5	GROUND SURFACE
10															PAVEMENT
	8.4	2.1	3	3	3									8.4	ROADWAY EMBANKMENT
	6.5	4.0	2	3	2										GRAY AND TAN SAND, MOIST TO SATURATED
5															
	2.4	8.1	2	1	3										
0															
	-2.6	13.1	1	1	2									-0.5	ALLUVIAL
-5															BROWN MUCK WITH WOOD FRAGMENTS, WET
	-7.6	18.1	WOH	2	4									-5.5	ALLUVIAL
-10															GRAY SANDY CLAY WITH WOOD FRAGMENTS, WET
	-12.6	23.1	8	9	8									-10.5	COASTAL PLAIN
-15															GRAY SAND WITH SHELL FRAGMENTS, SATURATED (YORKTOWN FORMATION)
	-17.6	28.1	4	5	7										
-20															
	-22.6	33.1	14	28	29										
-25															
	-27.6	38.1	19	27	28										
-30															
	-32.6	43.1	12	27	44									-33.1	
-35															
	-37.6	48.1	10	11	9									-35.5	COASTAL PLAIN
-40															GRAY SAND AND SHELL HASH, SATURATED (YORKTOWN FORMATION)
	-42.6	53.1	6	11	17									-40.5	COASTAL PLAIN
-45															GRAY SAND AND SILTY SAND WITH SHELL FRAGMENTS, SATURATED (YORKTOWN FORMATION)
	-47.6	58.1	5	5	6										
-50															
	-52.6	63.1	4	5	10									-54.1	Boring Terminated at Elevation -54.1 ft in Medium Dense Sand

NCDOT BORE DOUBLE B4593_GEO_BRDG0038.GPJ NC_DOT.GDT 6/14/18

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 38422.1.2		TIP B-4593		COUNTY PAMLICO		GEOLOGIST Zimarino, S. N.	
SITE DESCRIPTION BRIDGE NUMBER 38 ON -L- (NC 55) OVER TRENT CREEK							GROUND WTR (ft)
BORING NO. B2-B		STATION 17+27		OFFSET 7 ft RT		ALIGNMENT -L-	
COLLAR ELEV. -6.6 ft		TOTAL DEPTH 62.5 ft		NORTHING 500,744		EASTING 2,682,406	
DRILL RIG/HAMMER EFF./DATE GFO0075 CME-45C 84% 08/21/2017			DRILL METHOD Mud Rotary		HAMMER TYPE Automatic		
DRILLER Edmondson, J. M.		START DATE 06/06/18		COMP. DATE 06/06/18		SURFACE WATER DEPTH 7.2ft	

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
5															
0															
-5															
-6.6	0.0														
-10	-10.3	3.7	2	2	4										
-15	-15.3	8.7	2	2	5										
-17.6	11.0		1	2	4										
-20															
-22.6	16.0		11	21	28										
-25															
-27.6	21.0		9	19	23										
-30															
-32.6	26.0		7	15	20										
-35															
-37.6	31.0		8	8	12										
-40															
-42.6	36.0		5	12	16										
-45															
-47.6	41.0		5	5	7										
-50															
-52.6	46.0		3	5	8										
-55															
-57.6	51.0		4	5	6										
-60															
-62.6	56.0		1	5	7										
-65															
-67.6	61.0		3	5	8										

WBS 38422.1.2		TIP B-4593		COUNTY PAMLICO		GEOLOGIST Zimarino, S. N.	
SITE DESCRIPTION BRIDGE NUMBER 38 ON -L- (NC 55) OVER TRENT CREEK							GROUND WTR (ft)
BORING NO. EB2-B		STATION 17+82		OFFSET 8 ft RT		ALIGNMENT -L-	
COLLAR ELEV. 10.5 ft		TOTAL DEPTH 69.6 ft		NORTHING 500,719		EASTING 2,682,455	
DRILL RIG/HAMMER EFF./DATE GFO0075 CME-45C 84% 08/21/2017			DRILL METHOD Mud Rotary		HAMMER TYPE Automatic		
DRILLER Edmondson, J. M.		START DATE 06/04/18		COMP. DATE 06/05/18		SURFACE WATER DEPTH N/A	

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
15															
10															
10.5															
8.4	2.1		3	2	4										
5															
6.4	4.1		1	2	2										
0															
2.4	8.1		1	2	1										
-5															
-2.6	13.1		2	2	2										
-10															
-7.6	18.1		WOH	2	7										
-15															
-12.6	23.1		6	8	9										
-20															
-17.6	28.1		7	8	15										
-25															
-22.6	33.1		11	18	24										
-30															
-27.6	38.1		9	15	20										
-35															
-32.6	43.1		11	17	24										
-40															
-37.6	48.1		3	7	15										
-45															
-42.6	53.1		11	9	11										
-50															
-47.6	58.1		3	4	5										
-55															
-52.6	63.1		4	6	9										
-60															
-57.6	68.1		5	6	9										

NCDOT BORE DOUBLE B4593_GEO_BRDG0038.GPJ NC_DOT.GDT 6/14/18

GEOTECHNICAL BORING REPORT

BORE LOG

WBS 38422.1.2		TIP B-4593		COUNTY PAMLICO		GEOLOGIST Zimarino, S. N.										
SITE DESCRIPTION BRIDGE NUMBER 38 ON -L- (NC 55) OVER TRENT CREEK							GROUND WTR (ft)									
BORING NO. 15+03		STATION 15+03		OFFSET CL		ALIGNMENT -LDET-										
COLLAR ELEV. 4.0 ft		TOTAL DEPTH 12.0 ft		NORTHING 500,766		EASTING 2,682,276										
DRILL RIG/HAMMER EFF./DATE N/A		DRILL METHOD Hand Auger		HAMMER TYPE N/A												
DRILLER Edmondson, J. M.		START DATE 02/19/18		COMP. DATE 02/19/18		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
5														4.0	GROUND SURFACE	0.0
														1.0	ROADWAY EMBANKMENT LOOSE TO MEDIUM DENSE BROWN AND TAN SAND, MOIST TO SATURATED	3.0
0														2.0	ALLUVIAL LOOSE TO MEDIUM DENSE BROWN AND GRAY SAND WITH TRACE ORGANIC MATERIAL, MOIST TO SATURATED	6.0
														7.0	LOOSE TO MEDIUM DENSE BROWN SAND WITH LITTLE TO MODERATE ORGANIC MATERIAL, SATURATED	11.0
-5														8.0	LOOSE TO MEDIUM DENSE BROWN AND GRAY SAND, SATURATED	12.0
															Boring Terminated at Elevation -8.0 ft in Loose Sand	

WBS 38422.1.2		TIP B-4593		COUNTY PAMLICO		GEOLOGIST Zimarino, S. N.										
SITE DESCRIPTION BRIDGE NUMBER 38 ON -L- (NC 55) OVER TRENT CREEK							GROUND WTR (ft)									
BORING NO. 17+03		STATION 17+03		OFFSET 13 ft RT		ALIGNMENT -LDET-										
COLLAR ELEV. 3.2 ft		TOTAL DEPTH 13.0 ft		NORTHING 500,667		EASTING 2,682,450										
DRILL RIG/HAMMER EFF./DATE N/A		DRILL METHOD Hand Auger		HAMMER TYPE N/A												
DRILLER Edmondson, J. M.		START DATE 02/19/18		COMP. DATE 02/19/18		SURFACE WATER DEPTH N/A										
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG MOI	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
5														3.2	GROUND SURFACE	0.0
														1.8	ALLUVIAL LOOSE TO MEDIUM DENSE BROWN AND GRAY SAND WITH TRACE ORGANIC MATERIAL, MOIST TO SATURATED	5.0
0															SOFT BROWN SILT WITH LITTLE TO MODERATE ORGANIC MATERIAL, WET	
														8.8	LOOSE TO MEDIUM DENSE BROWN AND GRAY SAND, SATURATED	12.0
-5														9.8	LOOSE TO MEDIUM DENSE BROWN AND GRAY SAND, SATURATED	13.0
															Boring Terminated at Elevation -9.8 ft in Loose Sand	

NCDOT BORE DOUBLE B4593_GEO_BRDG0038.GPJ NC_DOT.GDT 6/14/18