


PROJ. REFERENCE NO.	SHEET NO.
I-5987B	TMP-2TS5

PLANS PREPARED FOR THE NCDOT BY:

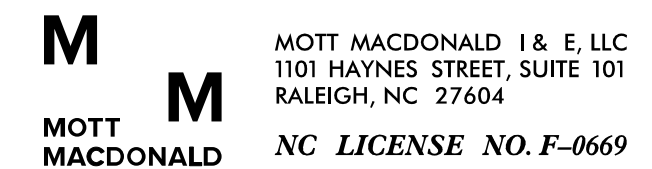

NOTES FOR TEMPORARY SHORING NO. B1-19 SEE TMP-45 AND TMP-46

FOR TEMPORARY SHORING AND POSITIVE PROTECTION FOR TEMPORARY SHORING, SEE PLANS AND TEMPORARY SHORING PROVISION.

BEFORE BEGINNING TEMPORARY SHORING DESIGN OR CONSTRUCTION, SURVEY EXISTING GROUND ELEVATIONS IN THE VICINITY OF SHORING LOCATIONS TO DETERMINE ACTUAL SHORING HEIGHTS.

DESIGN TEMPORARY SHORING FROM STATION -Y5RPB- 10+99±, 1.25 FT RT, TO STATION -Y5RPB- 21+09±, 11 FT RT, FOR THE FOLLOWING ASSUMED SOIL PARAMETERS AND GROUNDWATER ELEVATION:

- UNIT WEIGHT (γ) = 120 PCF
- FRICTION ANGLE (ϕ) = 30 DEGREES
- COHESION (C) = 0 PSF
- GROUNDWATER ELEVATION = 155 FT ±

DO NOT USE CANTILEVER, BRACED AND/OR ANCHORED SHORING FOR TEMPORARY SHORING FROM STATION -Y5RPB- 10+99±, 1.25 FT RT, TO STATION -Y5RPB- 21+09±, 11 FT RT.

AT THE CONTRACTOR'S OPTION, USE STANDARD TEMPORARY WALL FOR TEMPORARY SHORING FROM STATION -Y5RPB- 10+99±, 1.25 FT RT, TO STATION -Y5RPB- 21+09±, 11 FT RT. SEE GEOTECHNICAL STANDARD DETAIL NO. 1801.02 FOR STANDARD TEMPORARY WALLS.

NOTES FOR TEMPORARY SHORING NO. B1-20 SEE TMP-45 AND TMP-46

FOR TEMPORARY SHORING AND POSITIVE PROTECTION FOR TEMPORARY SHORING, SEE PLANS AND TEMPORARY SHORING PROVISION.

BEFORE BEGINNING TEMPORARY SHORING DESIGN OR CONSTRUCTION, SURVEY EXISTING GROUND ELEVATIONS IN THE VICINITY OF SHORING LOCATIONS TO DETERMINE ACTUAL SHORING HEIGHTS.

DESIGN TEMPORARY SHORING FROM STATION -Y5RPC- 16+19±, 11 FT LT, TO STATION -Y5RPC- 23+23±, 0 FT LT, FOR THE FOLLOWING ASSUMED SOIL PARAMETERS AND GROUNDWATER ELEVATION:

- UNIT WEIGHT (γ) = 120 PCF
- FRICTION ANGLE (ϕ) = 30 DEGREES
- COHESION (C) = 0 PSF
- GROUNDWATER ELEVATION = 160 FT ±

DO NOT USE CANTILEVER, BRACED AND/OR ANCHORED SHORING FOR TEMPORARY SHORING FROM STATION -Y5RPC- 16+19±, 11 FT LT, TO STATION -Y5RPC- 23+23±, 0 FT LT.

AT THE CONTRACTOR'S OPTION, USE STANDARD TEMPORARY WALL FOR TEMPORARY SHORING FROM STATION -Y5RPC- 16+19±, 11 FT LT, TO STATION -Y5RPC- 23+23±, 0 FT LT. SEE GEOTECHNICAL STANDARD DETAIL NO. 1801.02 FOR STANDARD TEMPORARY WALLS.

SEE TMP-46 AND TMP-47 NOTES FOR TEMPORARY SHORING NO. B1-21

FOR TEMPORARY SHORING AND POSITIVE PROTECTION FOR TEMPORARY SHORING, SEE PLANS AND TEMPORARY SHORING PROVISION.

BEFORE BEGINNING TEMPORARY SHORING DESIGN OR CONSTRUCTION, SURVEY EXISTING GROUND ELEVATIONS IN THE VICINITY OF SHORING LOCATIONS TO DETERMINE ACTUAL SHORING HEIGHTS.

DESIGN TEMPORARY SHORING FROM STATION -Y5RPD- 10+00±, 15 FT RT, TO STATION -Y5RPD- 24+35±, 11 FT RT, FOR THE FOLLOWING ASSUMED SOIL PARAMETERS AND GROUNDWATER ELEVATION:

- UNIT WEIGHT (γ) = 120 PCF
- FRICTION ANGLE (ϕ) = 30 DEGREES
- COHESION (C) = 0 PSF
- GROUNDWATER ELEVATION = 158 FT ±

DO NOT USE CANTILEVER, BRACED AND/OR ANCHORED SHORING FOR TEMPORARY SHORING FROM STATION -Y5RPD- 10+00±, 15 FT RT, TO STATION -Y5RPD- 24+35±, 11 FT RT.

AT THE CONTRACTOR'S OPTION, USE STANDARD TEMPORARY WALL FOR TEMPORARY SHORING FROM STATION -Y5RPD- 10+00±, 15 FT RT, TO STATION -Y5RPD- 24+35±, 11 FT RT. SEE GEOTECHNICAL STANDARD DETAIL NO. 1801.02 FOR STANDARD TEMPORARY WALLS.

NOTES FOR TEMPORARY SHORING NO. B1-22 SEE TMP-47

FOR TEMPORARY SHORING AND POSITIVE PROTECTION FOR TEMPORARY SHORING, SEE PLANS AND TEMPORARY SHORING PROVISION.

BEFORE BEGINNING TEMPORARY SHORING DESIGN OR CONSTRUCTION, SURVEY EXISTING GROUND ELEVATIONS IN THE VICINITY OF SHORING LOCATIONS TO DETERMINE ACTUAL SHORING HEIGHTS.

DESIGN TEMPORARY SHORING FROM STATION -L- 632+01±, 46 FT RT, TO STATION -L- 633+00±, 46 FT RT, FOR THE FOLLOWING ASSUMED SOIL PARAMETERS AND GROUNDWATER ELEVATION:

- UNIT WEIGHT (γ) = 120 PCF
- FRICTION ANGLE (ϕ) = 30 DEGREES
- COHESION (C) = 0 PSF
- GROUNDWATER ELEVATION = 158 FT ±

DO NOT USE CANTILEVER, BRACED AND/OR ANCHORED SHORING FOR TEMPORARY SHORING FROM STATION -L- 632+01±, 46 FT RT, TO STATION -L- 633+00±, 46 FT RT.

AT THE CONTRACTOR'S OPTION, USE STANDARD TEMPORARY WALL FOR TEMPORARY SHORING FROM STATION -L- 632+01±, 46 FT RT, TO STATION -L- 633+00±, 46 FT RT. SEE GEOTECHNICAL STANDARD DETAIL NO. 1801.02 FOR STANDARD TEMPORARY WALLS.

NOTES FOR TEMPORARY SHORING NO. B1-23 SEE TMP-58

FOR TEMPORARY SHORING AND POSITIVE PROTECTION FOR TEMPORARY SHORING, SEE PLANS AND TEMPORARY SHORING PROVISION.

BEFORE BEGINNING TEMPORARY SHORING DESIGN OR CONSTRUCTION, SURVEY EXISTING GROUND ELEVATIONS IN THE VICINITY OF SHORING LOCATIONS TO DETERMINE ACTUAL SHORING HEIGHTS.

DESIGN TEMPORARY SHORING FROM STATION -L- 601+00±, 33 FT RT, TO STATION -L- 610+32±, 33.5 FT RT, FOR THE FOLLOWING ASSUMED SOIL PARAMETERS AND GROUNDWATER ELEVATION:

- UNIT WEIGHT (γ) = 120 PCF
- FRICTION ANGLE (ϕ) = 30 DEGREES
- COHESION (C) = 0 PSF
- GROUNDWATER ELEVATION = 160 FT ±

DO NOT USE CANTILEVER, BRACED AND/OR ANCHORED SHORING FOR TEMPORARY SHORING FROM STATION -L- 601+00±, 33 FT RT, TO STATION -L- 610+32±, 33.5 FT RT.

AT THE CONTRACTOR'S OPTION, USE STANDARD TEMPORARY WALL FOR TEMPORARY SHORING FROM STATION -L- 601+00±, 33 FT RT, TO STATION -L- 610+32±, 33.5 FT RT. SEE GEOTECHNICAL STANDARD DETAIL NO. 1801.02 FOR STANDARD TEMPORARY WALLS.

NOTES FOR TEMPORARY SHORING NO. B1-24 SEE TMP-56 AND TMP-57

FOR TEMPORARY SHORING AND POSITIVE PROTECTION FOR TEMPORARY SHORING, SEE PLANS AND TEMPORARY SHORING PROVISION.

BEFORE BEGINNING TEMPORARY SHORING DESIGN OR CONSTRUCTION, SURVEY EXISTING GROUND ELEVATIONS IN THE VICINITY OF SHORING LOCATIONS TO DETERMINE ACTUAL SHORING HEIGHTS.

DESIGN TEMPORARY SHORING FROM STATION -L- 619+44±, 34 FT RT, TO STATION -L- 632+80±, 28 FT RT, FOR THE FOLLOWING ASSUMED SOIL PARAMETERS AND GROUNDWATER ELEVATION:

- UNIT WEIGHT (γ) = 120 PCF
- FRICTION ANGLE (ϕ) = 30 DEGREES
- COHESION (C) = 0 PSF
- GROUNDWATER ELEVATION = 158 FT ±


DO NOT USE CANTILEVER, BRACED AND/OR ANCHORED SHORING FOR TEMPORARY SHORING FROM STATION -L- 619+44±, 34 FT RT, TO STATION -L- 632+80±, 28 FT RT.

AT THE CONTRACTOR'S OPTION, USE STANDARD TEMPORARY WALL FOR TEMPORARY SHORING FROM STATION -L- 619+44±, 34 FT RT, TO STATION -L- 632+80±, 28 FT RT. SEE GEOTECHNICAL STANDARD DETAIL NO. 1801.02 FOR STANDARD TEMPORARY WALLS.

THE TEMPORARY SHORING NOTES SHOWN ON THIS SHEET WERE PROVIDED THROUGH A SEALED DOCUMENT FROM THE GEOTECHNICAL ENGINEERING UNIT. THE DOCUMENT WAS SUBMITTED TO THE NCDOT DIVISION ENGINEER ON FEBRUARY 10, 2022 AND SEALED BY A PROFESSIONAL ENGINEER, JINYOUNG PARK, LICENSE # 032171.

APPROVED: *Lori D. Stouchko*
 DATE: 4/29/2022

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED

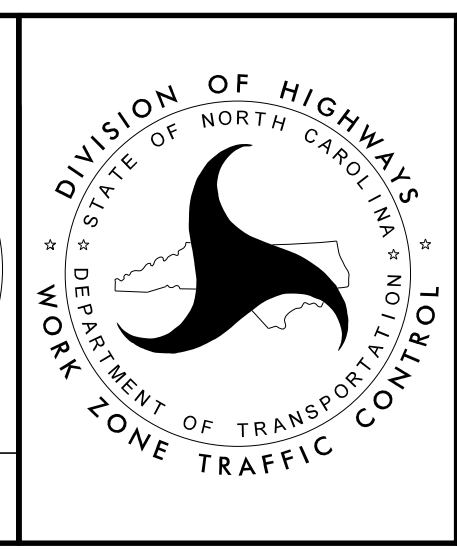

SECTION 1

TEMPORARY SHORING NOTES

SECTION 1

LOCATIONS B1-19

THRU B1-24

3/15/2022 G:\50100191\NV5_1-5987B\1-5987B\TrafficControl\Top\1-5987B_TC_TMP-02TS05_Temporary Shoring B1-19 thru B1-24.dgn User:ST086227