

PROJ. REFERENCE NO.	SHEET NO.
I-5987B	TMP-2TS11

SEE SHEET TMP-185
TEMPORARY SHORING LOCATION NO. (B2-19) ESTIMATED QUANTITY = 358 SF
 -Y6- STA. 23+20±, 19.0' RT TO -Y6- STA. 23+76±, 19.0' RT
 LENGTH = 56' AVERAGE HEIGHT = 6.4 FT MAXIMUM HEIGHT = 10.0 FT
 FOR TEMPORARY SHORING AND POSITIVE PROTECTION FOR TEMPORARY SHORING,
 SEE PLANS AND TEMPORARY SHORING PROVISION.
 BEFORE BEGINNING TEMPORARY SHORING DESIGN OR CONSTRUCTION, SURVEY
 EXISTING GROUND ELEVATIONS IN THE VICINITY OF SHORING LOCATIONS TO
 DETERMINE ACTUAL SHORING HEIGHTS.
 DESIGN TEMPORARY SHORING FROM STATION -Y6- 23+20±, 19 FT RT, TO
 STATION -Y6- 23+76±, 19 FT RT, FOR THE FOLLOWING ASSUMED SOIL
 PARAMETERS AND GROUNDWATER ELEVATION:
 UNIT WEIGHT (γ) = 120 PCF
 FRICTION ANGLE (ϕ) = 30 DEGREES
 COHESION (C) = 0 PSF
 GROUNDWATER ELEVATION = 156 FT±
 DO NOT USE A TEMPORARY WALL FOR TEMPORARY SHORING FROM STATION -Y6-
 23+20±, 19 FT RT, TO STATION -Y6- 23+76±, 19 FT RT.
 AT THE CONTRACTOR'S OPTION, USE STANDARD TEMPORARY SHORING FOR
 TEMPORARY SHORING FROM STATION -Y6- 23+20±, 19 FT RT, TO STATION -Y6-
 23+76±, 19 FT RT. SEE GEOTECHNICAL STANDARD DETAIL NO. 1801.01 FOR
 STANDARD TEMPORARY SHORING.

SEE SHEET TMP-185
TEMPORARY SHORING LOCATION NO. (B2-20) ESTIMATED QUANTITY = 319 SF
 -Y6- STA. 23+20±, 14.0' RT TO -Y6- STA. 23+76±, 14.0' RT
 LENGTH = 56' AVERAGE HEIGHT = 5.7 FT MAXIMUM HEIGHT = 10.0 FT
 FOR TEMPORARY SHORING AND POSITIVE PROTECTION FOR TEMPORARY SHORING,
 SEE PLANS AND TEMPORARY SHORING PROVISION.
 BEFORE BEGINNING TEMPORARY SHORING DESIGN OR CONSTRUCTION, SURVEY
 EXISTING GROUND ELEVATIONS IN THE VICINITY OF SHORING LOCATIONS TO
 DETERMINE ACTUAL SHORING HEIGHTS.
 DESIGN TEMPORARY SHORING FROM STATION -Y6- 23+20±, 14 FT RT, TO
 STATION -Y6- 23+76±, 14 FT RT, FOR THE FOLLOWING ASSUMED SOIL
 PARAMETERS AND GROUNDWATER ELEVATION:
 UNIT WEIGHT (γ) = 120 PCF
 FRICTION ANGLE (ϕ) = 30 DEGREES
 COHESION (C) = 0 PSF
 GROUNDWATER ELEVATION = 156 FT±
 DO NOT USE CANTILEVER, BRACED AND/OR ANCHORED SHORING FOR TEMPORARY
 SHORING FROM STATION -Y6- 23+20±, 14 FT RT, TO STATION -Y6- 23+76±,
 14 FT RT.
 AT THE CONTRACTOR'S OPTION, USE STANDARD TEMPORARY WALL FOR TEMPORARY
 SHORING FROM STATION -Y6- 23+20±, 14 FT RT, TO STATION -Y6- 23+76±,
 14 FT RT. SEE GEOTECHNICAL STANDARD DETAIL NO. 1801.02 FOR STANDARD
 TEMPORARY WALLS.

SEE SHEET
 TMP-190
TEMPORARY SHORING LOCATION NO. (B2-21) ESTIMATED QUANTITY = 2100 SF
 -Y6- STA. 20+25±, 7.0' LT TO -Y6- STA. 25+25±, 26.5' RT
 LENGTH = 500' AVERAGE HEIGHT = 4.2 FT MAXIMUM HEIGHT = 7.2 FT
 FOR TEMPORARY SHORING AND POSITIVE PROTECTION FOR TEMPORARY SHORING,
 SEE PLANS AND TEMPORARY SHORING PROVISION.
 BEFORE BEGINNING TEMPORARY SHORING DESIGN OR CONSTRUCTION, SURVEY
 EXISTING GROUND ELEVATIONS IN THE VICINITY OF SHORING LOCATIONS TO
 DETERMINE ACTUAL SHORING HEIGHTS.
 DESIGN TEMPORARY SHORING FROM STATION -Y6- 20+25±, 7 FT LT, TO
 STATION -Y6- 25+25±, 26.5 FT RT, FOR THE FOLLOWING ASSUMED SOIL
 PARAMETERS AND GROUNDWATER ELEVATION:
 UNIT WEIGHT (γ) = 120 PCF
 FRICTION ANGLE (ϕ) = 30 DEGREES
 COHESION (C) = 0 PSF
 GROUNDWATER ELEVATION = 158 FT±
 DO NOT USE CANTILEVER, BRACED AND/OR ANCHORED SHORING FOR TEMPORARY
 SHORING FROM STATION -Y6- 20+25±, 7 FT LT, TO STATION -Y6- 25+25±,
 26.5 FT RT.
 AT THE CONTRACTOR'S OPTION, USE STANDARD TEMPORARY WALL FOR TEMPORARY
 SHORING FROM STATION -Y6- 20+25±, 7 FT LT, TO STATION -Y6- 25+25±,
 26.5 FT RT. SEE GEOTECHNICAL STANDARD DETAIL NO. 1801.02 FOR STANDAR
 TEMPORARY WALLS.

SEE SHEET TMP-200
TEMPORARY SHORING LOCATION NO. (B2-22) ESTIMATED QUANTITY = 204 SF
 -L- STA. 883+11±, 9.5' LT TO -L- STA. 883+62±, 9.5' LT
 LENGTH = 51' AVERAGE HEIGHT = 4.0 FT MAXIMUM HEIGHT = 5.0 FT
 FOR TEMPORARY SHORING AND POSITIVE PROTECTION FOR TEMPORARY SHORING,
 SEE PLANS AND TEMPORARY SHORING PROVISION.
 BEFORE BEGINNING TEMPORARY SHORING DESIGN OR CONSTRUCTION, SURVEY
 EXISTING GROUND ELEVATIONS IN THE VICINITY OF SHORING LOCATIONS TO
 DETERMINE ACTUAL SHORING HEIGHTS.
 DESIGN TEMPORARY SHORING FROM STATION -L- 883+11±, 9.5 FT LT, TO
 STATION -L- 883+62±, 9.5 FT LT, FOR THE FOLLOWING ASSUMED SOIL
 PARAMETERS AND GROUNDWATER ELEVATION:
 UNIT WEIGHT (γ) = 120 PCF
 FRICTION ANGLE (ϕ) = 30 DEGREES
 COHESION (C) = 0 PSF
 GROUNDWATER ELEVATION = 167 FT±
 DO NOT USE A TEMPORARY WALL FOR TEMPORARY SHORING FROM STATION -L-
 883+11±, 9.5 FT LT, TO STATION -L- 883+62±, 9.5 FT LT.
 AT THE CONTRACTOR'S OPTION, USE STANDARD TEMPORARY SHORING FOR
 TEMPORARY SHORING FROM STATION -L- 883+11±, 9.5 FT LT, TO STATION -L-
 883+62±, 9.5 FT LT. SEE GEOTECHNICAL STANDARD DETAIL NO. 1801.01 FOR
 STANDARD TEMPORARY SHORING.

SEE SHEET TMP-200
TEMPORARY SHORING LOCATION NO. (B2-23) ESTIMATED QUANTITY = 204 SF
 -L- STA. 883+11±, 9.5' RT TO -L- STA. 883+62±, 9.5' RT
 LENGTH = 51' AVERAGE HEIGHT = 4.0 FT MAXIMUM HEIGHT = 5.0 FT
 FOR TEMPORARY SHORING AND POSITIVE PROTECTION FOR TEMPORARY SHORING,
 SEE PLANS AND TEMPORARY SHORING PROVISION.
 BEFORE BEGINNING TEMPORARY SHORING DESIGN OR CONSTRUCTION, SURVEY
 EXISTING GROUND ELEVATIONS IN THE VICINITY OF SHORING LOCATIONS TO
 DETERMINE ACTUAL SHORING HEIGHTS.
 DESIGN TEMPORARY SHORING FROM STATION -L- 883+11±, 9.5 FT RT, TO
 STATION -L- 883+62±, 9.5 FT RT, FOR THE FOLLOWING ASSUMED SOIL
 PARAMETERS AND GROUNDWATER ELEVATION:
 UNIT WEIGHT (γ) = 120 PCF
 FRICTION ANGLE (ϕ) = 30 DEGREES
 COHESION (C) = 0 PSF
 GROUNDWATER ELEVATION = 167 FT±
 DO NOT USE A TEMPORARY WALL FOR TEMPORARY SHORING FROM STATION -L-
 883+11±, 9.5 FT RT, TO STATION -L- 883+62±, 9.5 FT RT.
 AT THE CONTRACTOR'S OPTION, USE STANDARD TEMPORARY SHORING FOR
 TEMPORARY SHORING FROM STATION -L- 883+11±, 9.5 FT RT, TO STATION -L-
 883+62±, 9.5 FT RT. SEE GEOTECHNICAL STANDARD DETAIL NO. 1801.01 FOR
 STANDARD TEMPORARY SHORING.


SEE SHEET TMP-200
TEMPORARY SHORING LOCATION NO. (B2-24) ESTIMATED QUANTITY = 775 SF
 -Y7- STA. 28+24±, 30.0' LT TO -Y7- STA. 28+87±, 30.0' LT
 LENGTH = 63' AVERAGE HEIGHT = 12.3 FT MAXIMUM HEIGHT = 18.0 FT
 FOR TEMPORARY SHORING AND POSITIVE PROTECTION FOR TEMPORARY SHORING,
 SEE PLANS AND TEMPORARY SHORING PROVISION.
 BEFORE BEGINNING TEMPORARY SHORING DESIGN OR CONSTRUCTION, SURVEY
 EXISTING GROUND ELEVATIONS IN THE VICINITY OF SHORING LOCATIONS TO
 DETERMINE ACTUAL SHORING HEIGHTS.
 DESIGN TEMPORARY SHORING FROM STATION -Y7- 28+24±, 30 FT LT, TO
 STATION -Y7- 28+87±, 30 FT LT, FOR THE FOLLOWING ASSUMED SOIL
 PARAMETERS AND GROUNDWATER ELEVATION:
 UNIT WEIGHT (γ) = 120 PCF
 FRICTION ANGLE (ϕ) = 30 DEGREES
 COHESION (C) = 0 PSF
 GROUNDWATER ELEVATION = 167 FT±
 DO NOT USE A TEMPORARY WALL FOR TEMPORARY SHORING FROM STATION -Y7-
 28+24±, 30 FT LT, TO STATION -Y7- 28+87±, 30 FT LT.
 IT MAY BE PREFERRED TO USE A TEMPORARY SOIL NAIL WALL FOR TEMPORARY
 SHORING FROM STATION -Y7- 28+24±, 30 FT LT, TO STATION -Y7- 28+87±,
 30 FT LT. FOR TEMPORARY SOIL NAIL WALLS, SEE TEMPORARY SOIL NAIL
 WALLS PROVISION.

3/15/2022
 U:\Traffic\Transportation Management Plan\TCP\PLAN SHEETS\I-5987B-TMP-2T\SIL-TEMPORARY-SHORING_NOTES.dgn
 angood


THE TEMPORARY SHORING NOTES SHOWN ON THIS SHEET WERE PROVIDED THROUGH A SEALED DOCUMENT FROM THE
 GEOTECHNICAL ENGINEER. THE DOCUMENT WAS SUBMITTED TO STANTEC CONSULTING ON (FEB 10, 2022) AND
 SEALED BY A PROFESSIONAL ENGINEER, (JINYOUNG PARK, Ph.D., P.E.), LICENSE #032171.



Stantec Consulting Services Inc.
 801 Jones Franklin Road
 Suite 300
 Raleigh, NC 27606
 Tel. 919.851.6866
 Fax. 919.851.7024
 www.stantec.com
 License No. F-0672

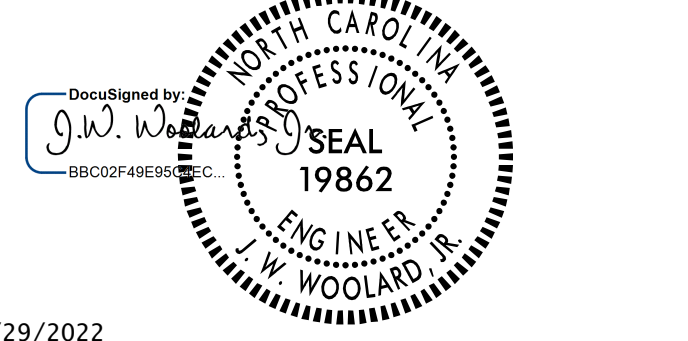

4/29/2022
**DOCUMENT NOT CONSIDERED FINAL
 UNLESS ALL SIGNATURES COMPLETED**

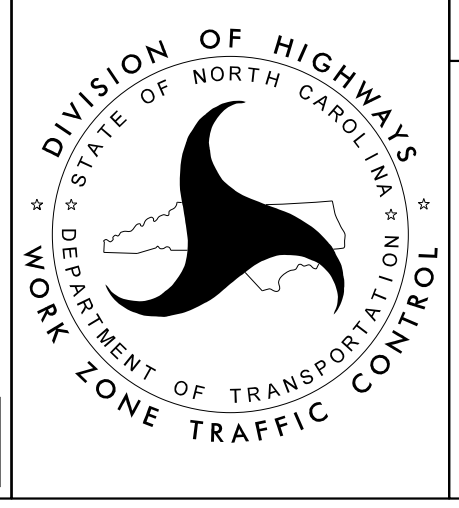

SECTION 2
TEMPORARY SHORING NOTES
SECTION 2
LOCATIONS B2-19
THRU B2-24