UTILITY CONSTRUCTION

GENERAL NOTES:

- 1. THE PROPOSED UTILITY CONSTRUCTION SHALL MEET THE APPLICABLE REQUIREMENTS OF THE NC DEPARTMENT OF TRANSPORTATION'S "STANDARD SPECIFICATIONS FOR ROADS AND STRUCTURES" DATED JANUARY 2012.
- 2. THE EXISTING UTILITIES BELONG TO TUCKASEIGEE WATER AND SEWER AUTHORITY
- 3. ALL WATER LINES TO BE INSTALLED
 WITHIN COMPLIANCE OF THE RULES AND
 REGULATIONS OF THE NORTH CAROLINA
 DEPARTMENT OF ENVIRONMENTAL AND NATURAL
 RESOURCES, DIVISION OF WATER RESOURCES,
 PUBLIC WATER SUPPLY SECTION. ALL SEWER
 LINES TO BE INSTALLED WITHIN COMPLIANCE
 OF THE RULES AND REGULATIONS OF THE
 NORTH CAROLINA DEPARTMENT OF
 ENVIRONMENT AND NATURAL RESOURCES,
 DIVISION OF WATER RESOURCES, WATER
 QUALITY SECTION. PERFORM ALL WORK IN
 ACCORDANCE WITH THE APPLICABLE PLUMBING
 CODES.
- 4. THE UTILITY OWNER OWNS THE EXISTING UTILITY FACILITIES AND WILL OWN THE NEW UTILITY FACILITIES AFTER ACCEPTANCE BY THE DEPARTMENT. THE DEPARTMENT OWNS THE CONSTRUCTION CONTRACT AND HAS ADMINISTRATIVE AUTHORITY. COMMUNICATIONS AND DECISIONS BETWEEN THE CONTRACTOR AND UTILITY OWNER ARE NOT BINDING UPON THE DEPARTMENT OR THIS CONTRACT UNLESS AUTHORIZED BY THE ENGINEER. AGREEMENTS BETWEEN THE UTILITY OWNER AND CONTRACTOR FOR THE WORK THAT IS NOT PART OF THIS CONTRACT OR IS SECONDARY TO THIS CONTRACT ARE ALLOWED, BUT ARE NOT BINDING UPON THE DEPARTMENT.
- 5. PROVIDE ACCESS FOR THE DEPARTMENT PERSONNEL AND THE OWNER'S REPRESENTATIVES TO ALL PHASES OF CONSTRUCTION. NOTIFY DEPARTMENT PERSONNEL AND THE UTILITY OWNER TWO WEEKS PRIOR TO COMMENCEMENT OF ANY WORK AND ONE WEEK PRIOR TO SERVICE INTERRUPTION. KEEP UTILITY OWNERS' REPRESENTATIVES INFORMED OF WORK PROGRESS AND PROVIDE OPPROTUNITY FOR INSPECTION OF CONSTRUCTION AND TESTING.

- 6. THE PLANS DEPICT THE BEST AVAILABLE INFORMATION FOR THE LOCATION, SIZE, AND TYPE OF MATERIAL FOR ALL EXISTING UTILITIES. MAKE INVESTIGATIONS FOR DETERMINING THE EXACT LOCATION, SIZE, AND TYPE MATERIAL OF THE EXISTING FACILITIES AS NECESSARY FOR THE CONSTRUCTION OF THE PROPOSED UTILITIES AND FOR AVOIDING DAMAGE TO EXISTING FACILITIES. REPAIR ANY DAMAGE INCURRED TO EXISTING FACILITIES TO THE ORIGINAL OR BETTER CONDITION AT NO ADDITONAL COST TO THE DEPARTMENT.
- 7. MAKE FINAL CONNECTIONS OF THE NEW WORK TO THE EXISTING SYSTEM WHERE INDICATED ON THE PLANS, AS REQUIRED TO FIT THE ACTUAL CONDITIONS, OR AS DIRECTED.
- 8. MAKE CONNECTIONS BETWEEN EXISTING AND PROPOSED UTILITIES AT TIMES MOST CONVENIENT TO THE PUBLIC, WITHOUT ENDANGERING THE UTILITY SERVICE, AND IN ACCORDANCE WITH THE UTILITY OWNER'S REQUIREMENTS. MAKE CONNECTIONS ON WEEKENDS, AT NIGHT, AND ON HOLIDAYS IF NECESSARY.
- 9. ALL UTILITY MATERIALS SHALL BE APPROVED PRIOR TO DELIVERY TO THE PROJECT. SEE 1500-7, "SUBMITTAL'S AND RECORDS" IN SECTION 1500 OF THE STANDARD SPECIFICATIONS.
- 10. REVISE THE 2012 STANDARD SPECIFICATIONS AS FOLLOWS: PAGE 15-11, SUB -ARTICLE 1520-3(A)(2) TESTING, LINE 5, REPLACE THE SECOND PARAGRAPH WITH THE FOLLOWING:

TEST ALL 24" AND SMALLER GRAVITY SEWER LINES FOR LEAKAGE USING INFILTRATION, EX FILTRATION, OR AIR TEST. PERFORM LINE AND GRADE TESTING AND DEFLECTION TESTING ON ALL GRAVITY LINES.

PROJECT SPECIFIC NOTES:

1. PROPOSED TEMPORARY WATER MAIN FROM
-L- LINE STATION 12+75 TO -L- LINE
STATION 18+00 SHALL BE
RIVER CROSSING D.I.R.J. (DUCTILE IRON
RESTRAINED JOINT) PIPE.

2. ALL PROPOSED PERMANENT 6" THRU 16" WATER MAIN TO BE D.I.R.J. DUCTILE IRON PIPE.

LIST OF STANDARD DRAWINGS


1515.01 WATER METER

1515.02 FIRE HYDRANT

1520.01 SEWER CLEAN OUT

1525.06 PRECAST CONCRETE SANITARY
SEWER MANHOLE WITH
CAST-IN-PLACE BOTTOM

PROJECT TYPICAL DETAILS

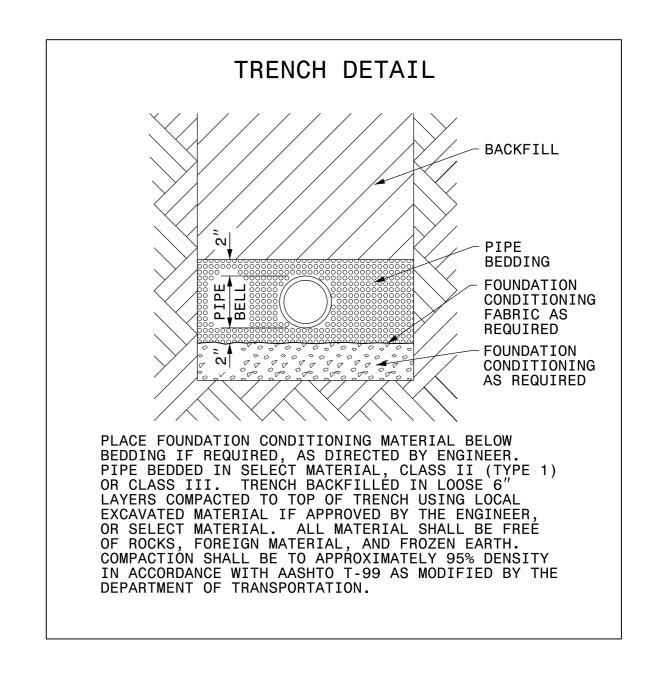

PROJECT REFERENCE NO. SHEET NO.

B-4159

DESIGNED BY: ARK

DRAWN BY: ARK

CHECKED BY: CAB

APPROVED BY: CAB

REVISED:

NORTH CAROL INA
DEPARTMENT OF
TRANSPORTATION

UTILITIES ENGINEERING SEC.
PHONE: (919)707-6690
FAX: (919)250-4151

SHEET NO.

SHEET NO.

UC-3

PARK

CAROL INA
DEPARTMENT OF
TRANSPORTATION

9/28/2015

UTILITY CONSTRUCTION
PLANS ONLY

UTILITY CONSTRUCTION