


PAVEMENT SCHEDULE

C1	5/8" ULTRA-THIN BONDED WEARING COURSE AT A RATE OF 70 LBS. PER SQ. YD.
C2	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
E1	PROP. APPROX. 4 1/2" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 513 LBS. PER SQ. YD.
T	SHOULDER GRADING
V1	MILL 2.0" OF EXISTING ASPHALT PAVEMENT
R1	MILLED RUMBLE STRIPS
U	EXISTING PAVEMENT

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

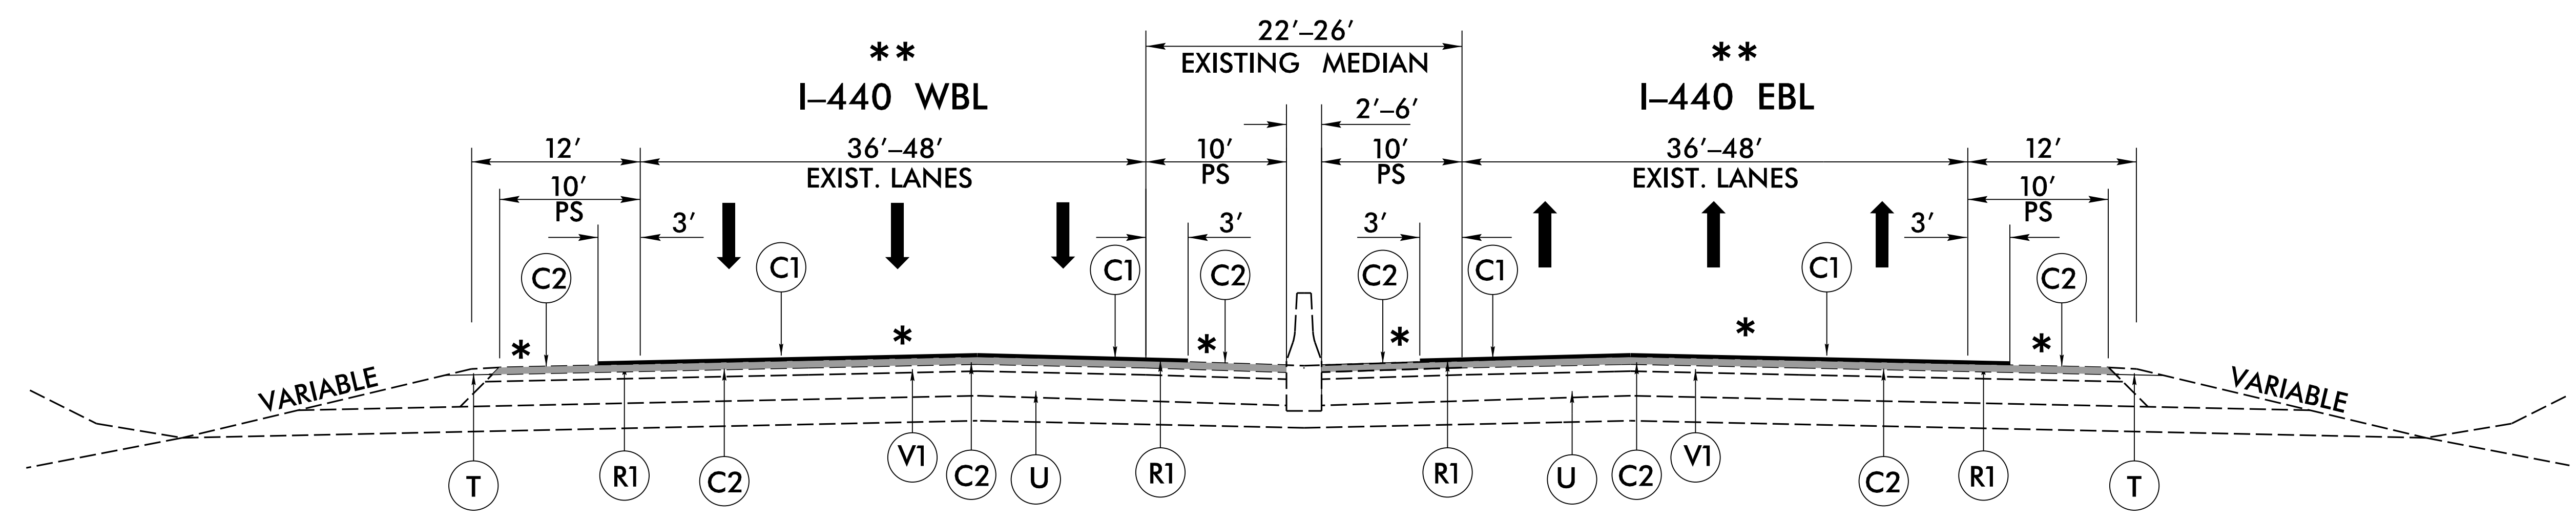

* MATCH EXISTING CROSS SLOPES

NOTE: SHOULDER GRADING ON MAP 1 - 925' +/-

TYPICAL SECTION NO. 1

USE TYPICAL SECTION NO. 1

MAP 1 I-440 EBL
MAP 1 I-440 WBL

**** NOTE:**
OPEN GRADED FRICTION COURSE IS PRESENT FROM GLENWOOD AVENUE BRIDGE TO 730' WEST OF BRIDGE AT SIX FORKS ROAD. LENGTH IS +/- 8400 LF
MILL MINIMUM 2 5/8" DEEP.

REVISIONS

8/17/99

5/13/2009 Relu_psh09_Typ.dgn
11:51:03 AM