
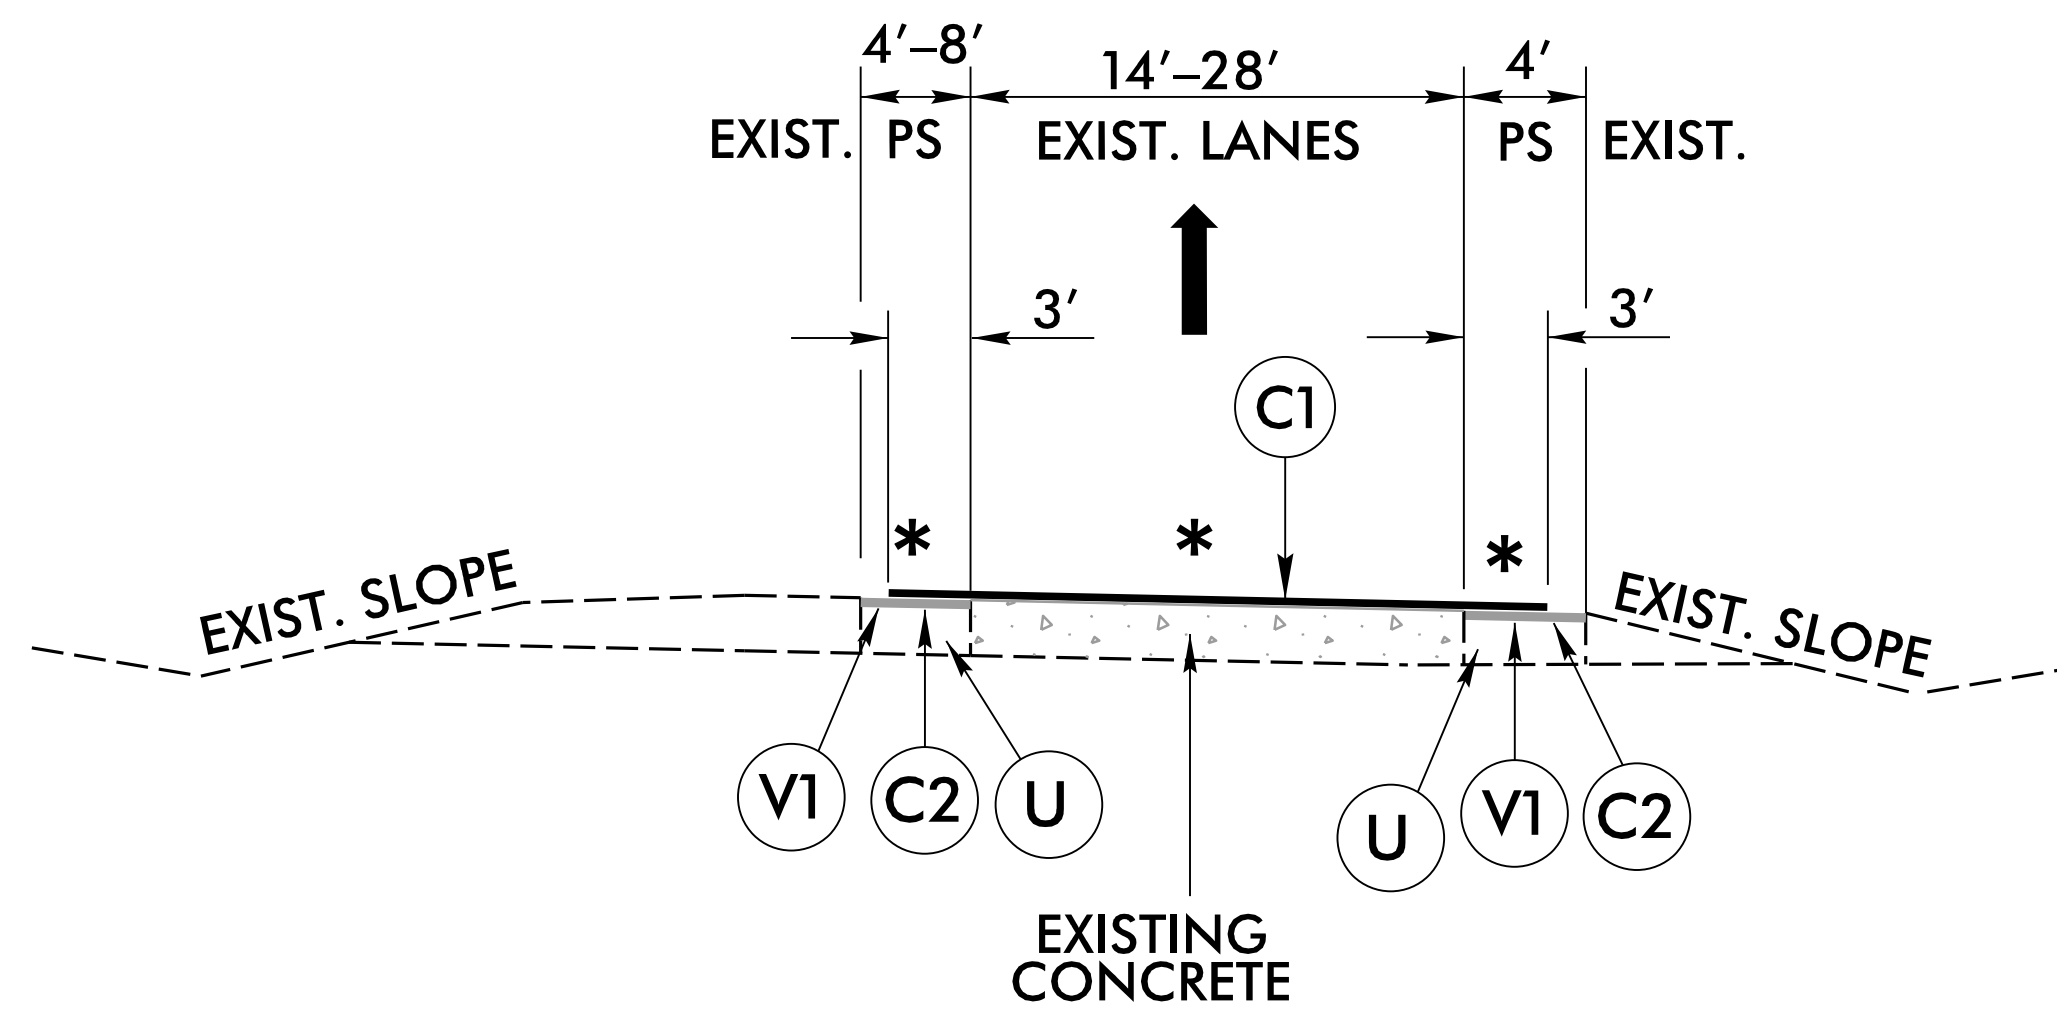


# PAVEMENT SCHEDULE

C1	5/8" ULTRA-THIN BONDED WEARING COURSE AT A RATE OF 70 LBS. PER SQ. YD.
C2	PROP. APPROX. 2.0" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5D, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
E1	PROP. APPROX. 4 1/2" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 513 LBS. PER SQ. YD.
T	SHOULDER GRADING
V1	MILL 2.0" OF EXISTING ASPHALT PAVEMENT
U	EXISTING PAVEMENT




NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

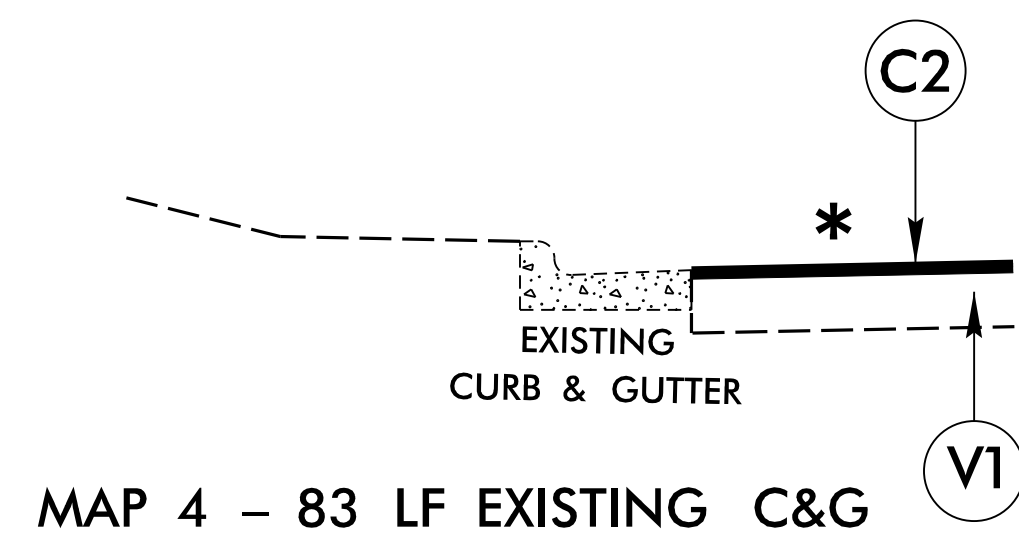

**TYPICAL SECTION NO. 5**

**USE TYPICAL SECTION NO. 5**

- MAP 4 I-440 EB RAMP
- MAP 5 I-440 EB RAMP
- MAP 18 I-440 WB RAMP
- MAP 21 I-440 WB RAMP

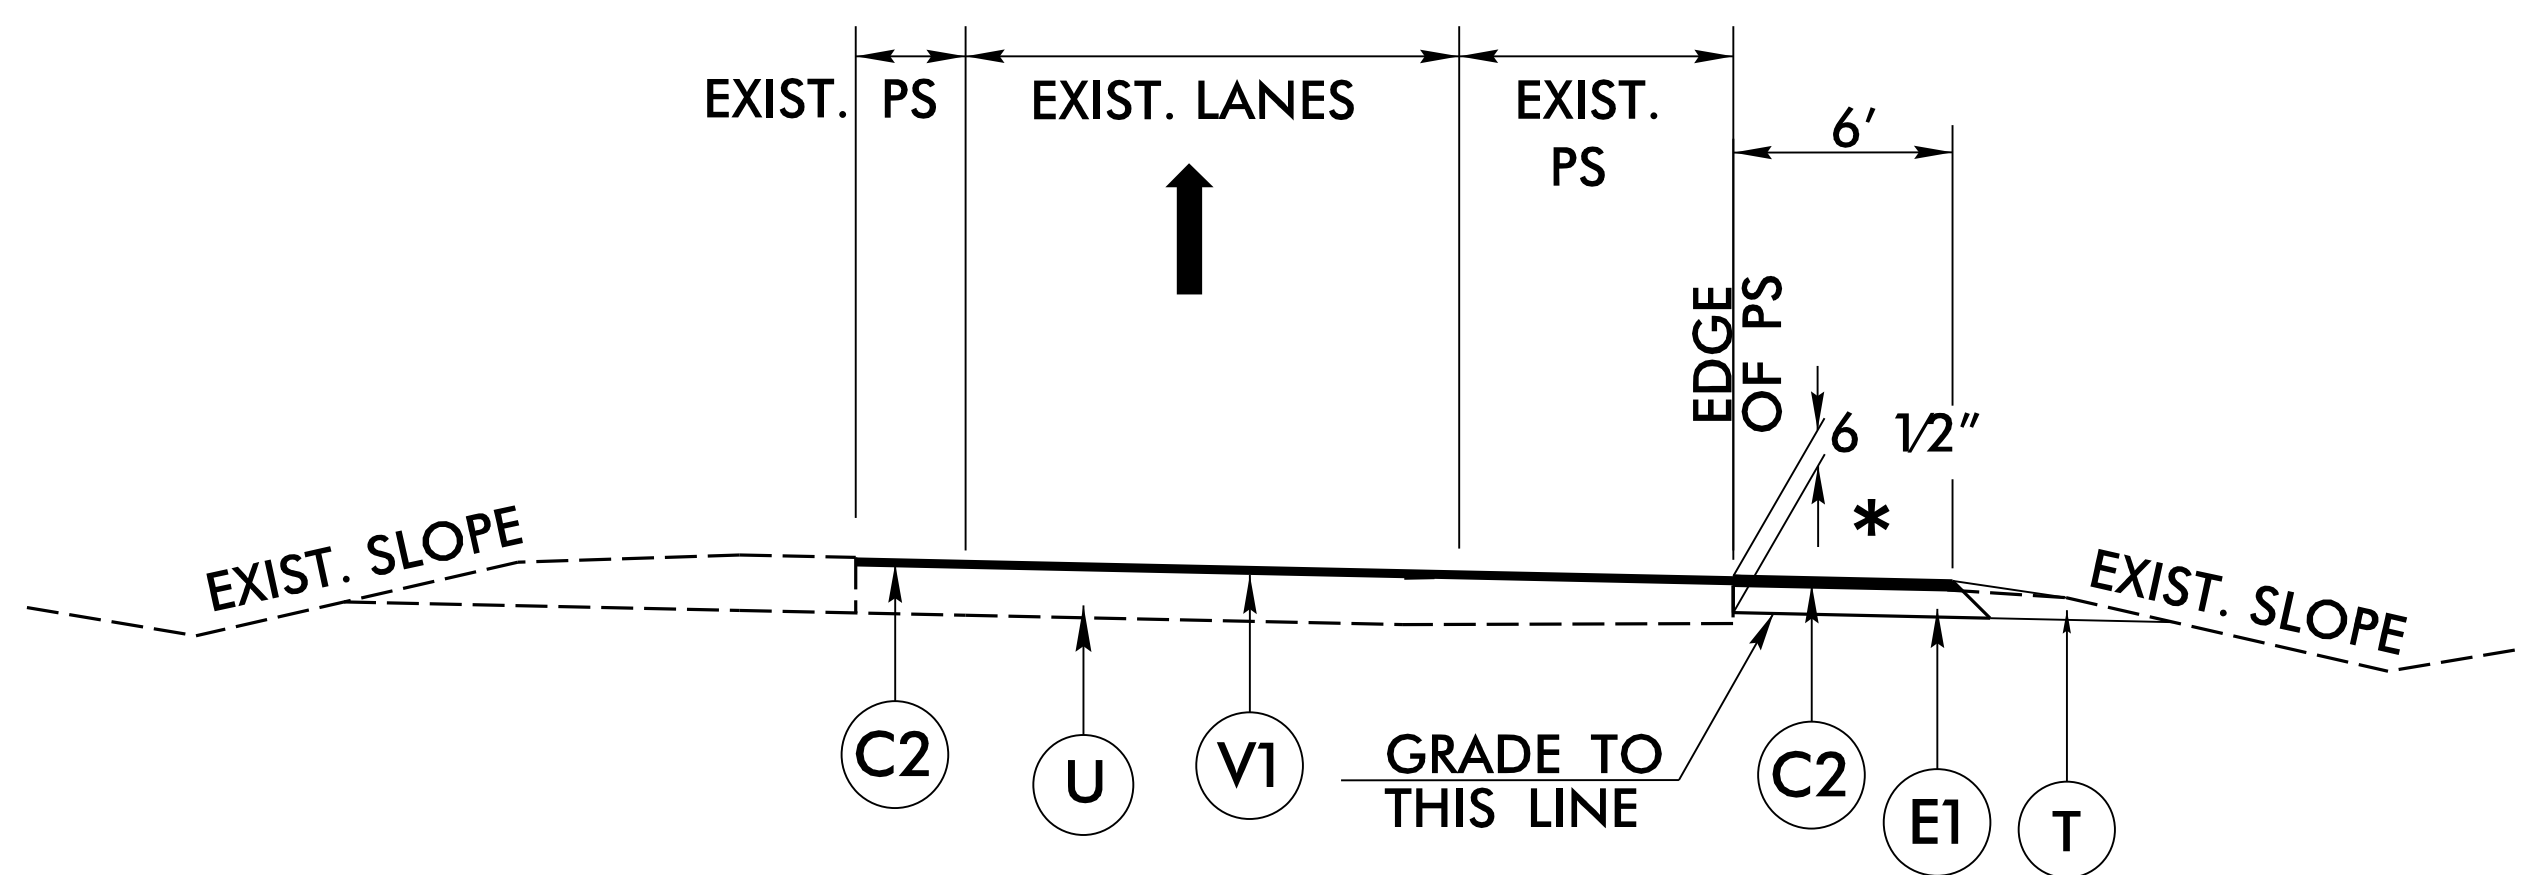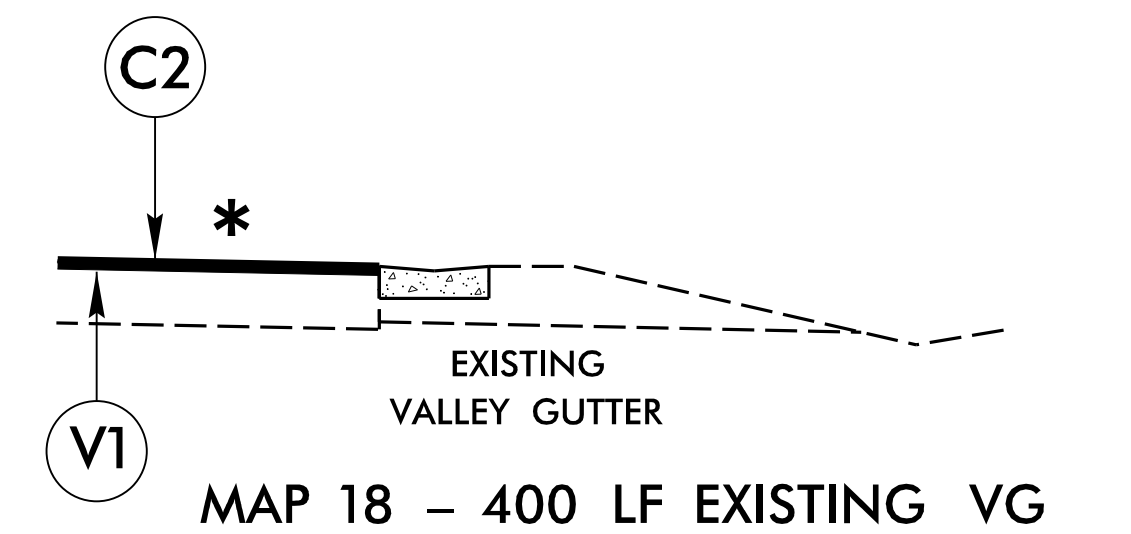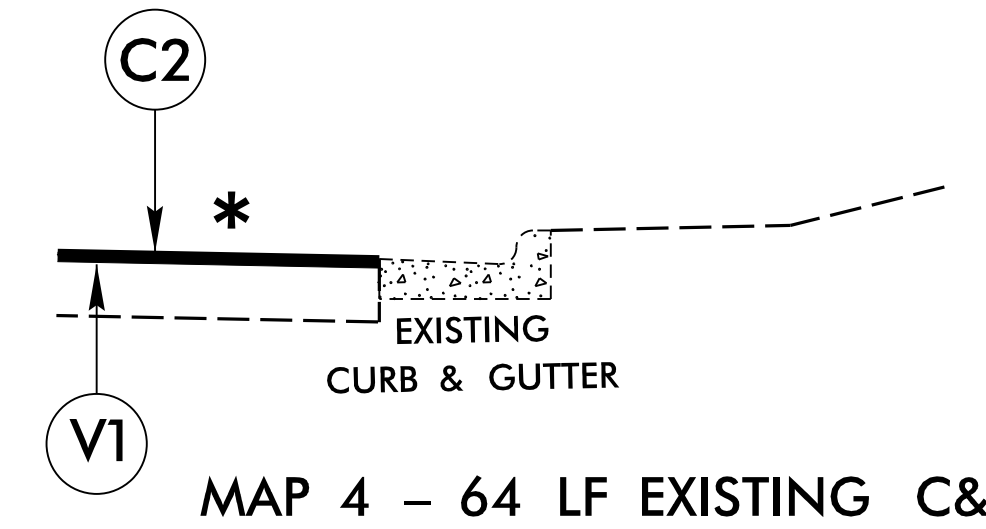

**TYPICAL SECTION NO. 6**

PAVED SHOULDER WIDENING

**USE TYPICAL SECTION NO. 6**

- MAP 24 I-440 WB RAMP 360 LF
- MAP 25 I-440 EB RAMP 240 LF

8/17/99

REVISIONS

5/13/2009 Relu\_psh12\_Typ.dgn