

^T2 :1 SLOPE

#78M -STONE

BACKFILL

3'-0"

CGEOTEXTILE ~


SECTION THRU SLAB

CORED

SLAB T

11/2" BACKER ROD

- 2 LAYERS OF 30 LB.
ROOFING FELT TO
PREVENT BOND

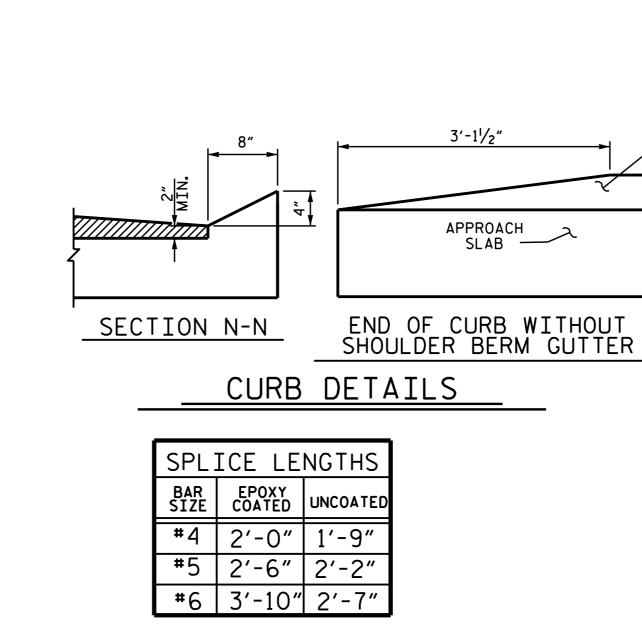

NOTES

FOR BRIDGE APPROACH FILL INCLUDING GEOTEXTILE, 4" Ø DRAINAGE PIPE, AND *78M STONE BACKFILL, SEE ROADWAY PLANS.

GEOTEXTILE SHALL BE TYPE 1 IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS SECTION 1056.


#78M STONE BACKFILL (CLASS V SELECT MATERIAL) SHALL BE IN ACCORDANCE WITH STANDARD SPECIFICATIONS SECTION 1016.

*78M STONE BACKFILL IS TO BE CONTINUOUS ALONG FILL FACE OF BACKWALL FROM OUTSIDE EDGE TO OUTSIDE EDGE OF APPROACH SLAB.


FOR THE 4" Ø DRAINAGE PIPE OUTLET(S), SEE ROADWAY STANDARD DRAWINGS.

AREA BETWEEN THE WINGWALL AND APPROACH SLAB SHALL BE GRADED TO DRAIN THE WATER AWAY FROM THE FILL FACE OF THE BRIDGE AND SHALL BE PAVED. SEE ROADWAY PLANS.

APPROACH SLAB GROOVING IS NOT REQUIRED.

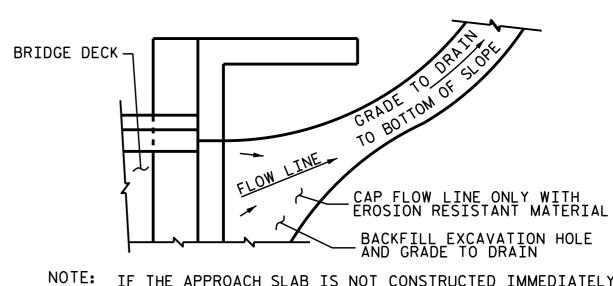

IF THE APPROACH SLAB IS NOT CONSTRUCTED IMMEDIATELY AFTER THE BACKFILLING OF THE END BENT EXCAVATION, GRADE TO DRAIN TO THE BOTTOM OF THE SLOPE AND PROVIDE EROSION RESISTANT MATERIAL, SUCH AS FIBERGLASS ROVING OR AS DIRECTED BY THE ENGINEER TO PREVENT SOIL EROSION AND TO PROTECT THE AREA ADJACENT TO THE STRUCTURE. THE CONTRACTOR WILL BE REQUIRED TO REMOVE THESE MATERIALS PRIOR TO CONSTRUCTION OF THE APPROACH SLAB.

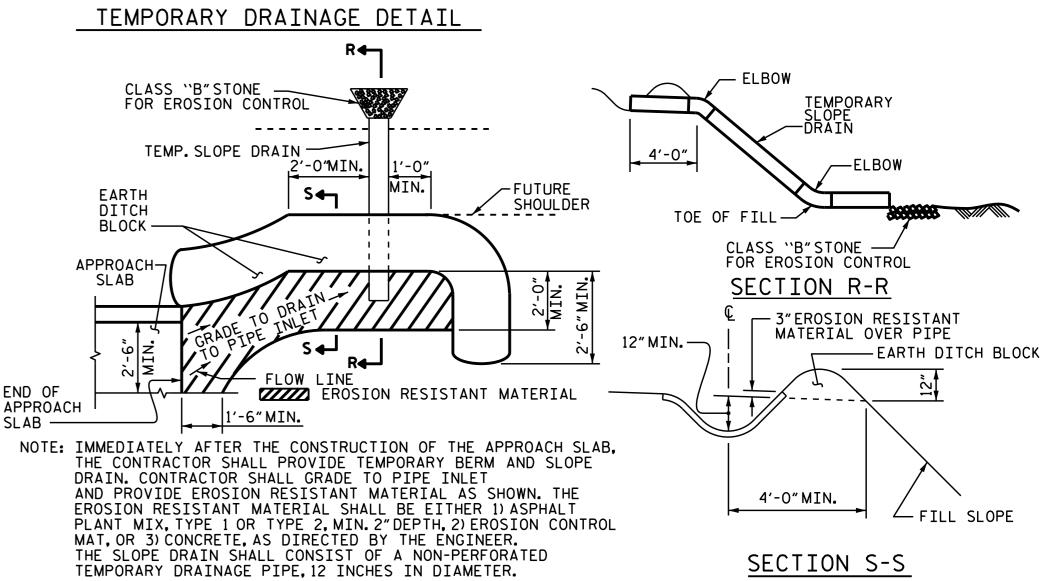

PLAN VIEW TEMPORARY BERM AND SLOPE DRAIN DETAILS

(TO BE USED WHEN SHOULDER BERM GUTTER IS REQUIRED)

SEAL (17230

: CACINEES

Wael Orafat

11/18/2015

B-5403 PROJECT NO._ TRANSYLVANIA COUNTY 14+56.00 -L-STATION:

BILL OF MATERIAL

APPROACH SLAB AT EB #1

BAR NO. SIZE TYPE LENGTH WEIGHT

13 | #4 | STR | 25'-10"

52 | #6 | STR | 11'-8"

APPROACH SLAB AT EB #2

BAR NO. SIZE TYPE LENGTH WEIGHT

13 | #4 | STR | 25'-10"

13 | #4 | STR | 25'-10"

*B1 | 52 | #5 | STR | 11'-2"

B2 | 52 | #6 | STR | 11'-8"

224

224

606

911

1135

830

16.0

224

224

606

911

1135

830

16.0

LBS.

LBS.

C.Y.

LBS.

LBS.

C. Y.

* A1 | 13 | #4 | STR | 25'-10"

*B1 | 52 | #5 | STR | 11'-2"

REINFORCING STEEL

CLASS AA CONCRETE

REINFORCING STEEL

CLASS AA CONCRETE

REINFORCING STEEL

* EPOXY COATED

REINFORCING STEEL

* EPOXY COATED

STATE OF NORTH CAROLINA DEPARTMENT OF TRANSPORTATION STANDARD BRIDGE APPROACH SLAB FOR PRESTRESSED CONCRETE

CORED SLAB UNIT (SUB-REGIONAL TIER) 90° SKEW

	JO SILII						
REVISIONS						SHEET NO.	
•	BY:	DATE:	NO.	BY:	DATE:	S-14	
			3			TOTAL SHEETS	
			4			14	

17-NOV-2015 12:42 Z:\Structures\Plans\finalplans\B5403_SD_AS.dgn

4"Ø PERFORATED — SCHEDULE 40 PVC PIPE

#4A2

11/2:1 SLOPE
OR STEEPER
(TO BE DETERMINED
BY THE CONTRACTOR)

ROADWAY-

ASSEMBLED BY :

DRAWN BY : SHS/MAA 5-09 REV. 12-11 REV. 8-14

CHECKED BY : BCH 5-09

CHECKED BY :

APPROVED WIRE BAR - SUPPORTS @ 3'-0"CTS.

H. T. BARBOUR DATE: 5-6-15

V. X. NGUYEN DATE : 5-15

NORMAL TO END BENT

MAA/AAC MAA/TMG

STD. NO. BAS_27_90S