

09-JAN-2019 07:36
S:\Contracts\Special Details\Jhove-ton\838d02 15in thru 48in 60deg skew.dgn
Jhove-ton AT USD-292595

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ENGLISH DETAIL DRAWING FOR
**CONCRETE ENDWALL FOR SINGLE AND
DOUBLE PIPE CULVERTS**
15" THRU 48" PIPE

SHEET 2 OF 2
838d02s1

GENERAL NOTES:

- * ALL CORNERS TO BE CHAMFERED 1".
- * THE CONTRACTOR WILL BE REQUIRED TO PLACE 2 - #6 BARS "Y" IN THE TOP OF ALL ENDWALLS FOR PIPE CULVERTS 42" AND OVER WITH A MINIMUM OF 3" COVER AND A LENGTH OF 6" LESS THAN ENDWALL.
- * FORMS ARE TO BE USED FOR THE CONSTRUCTION OF THE BOTTOM SLAB.
- * WALL THICKNESS (T) SHOWN IS NOT TO BE INTERPRETED TO MEAN THE THICKNESS ACCEPTABLE, BUT ARE USED ONLY IN COMPUTING ENDWALL QUANTITIES.
- * IF CONTRACTOR ELECTS TO USE CONSTRUCTION JOINT AT BOTTOM OF PIPE, BAR X (DOWELS SHALL BE PLACED IN THE BASE AS SHOWN ON PLANS. SPACING OF BARS TO BE APPROXIMATELY 12" CENTERS UNLESS ENGINEER DIRECTS OTHERWISE.
- * WHEN CONTRACTOR ELECTS TO USE CONSTRUCTION JOINT AT BOTTOM OF PIPE AND POURS BASE SEPERATELY, THE TOP BASE SHALL BE LEFT ROUGH.
- * WHEN SKEW ANGLE OF PIPE IS OVER/UNDER 30° USE G-1 DIMENSION FOR 30° PLUS/MINUS 3" FOR EACH 5° OVER/UNDER 30°.
- G2 DIMENSION WILL BE THE NEW DIMENSION DIVIDED BY THE COSINE OF THE ANGLE OF PIPE SKEW.
- * CLASS "B" CONCRETE SHALL BE USED.

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.




ENGLISH DETAIL DRAWING FOR
**CONCRETE ENDWALL FOR SINGLE AND
DOUBLE PIPE CULVERTS**
15" THRU 48" PIPE

SHEET 2 OF 2
838p02s1

STATE OF
NORTH CAROLINA
DEPT. OF TRANSPORTATION
DIVISION OF HIGHWAYS
RALEIGH, N.C.

ENGLISH DETAIL DRAWING FOR
**CONCRETE ENDWALL FOR SINGLE AND
DOUBLE PIPE CULVERTS**
15" THRU 48" PIPE 60° OR 120° SKEW

SHEET 1 OF 2
838d02s1

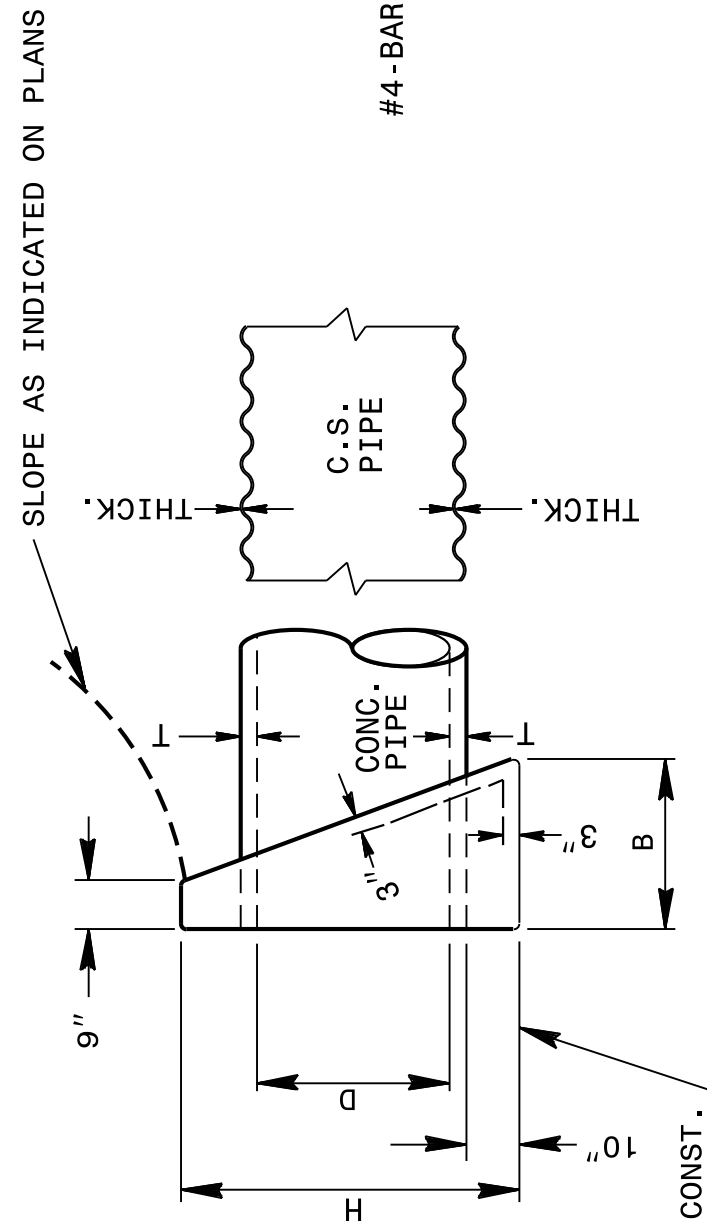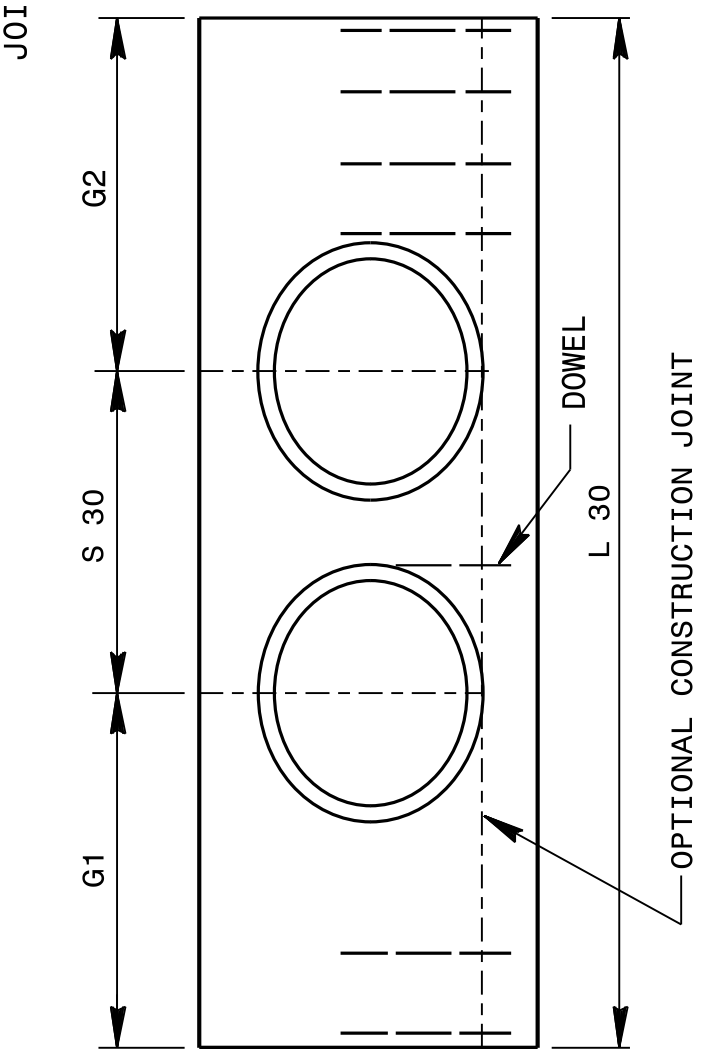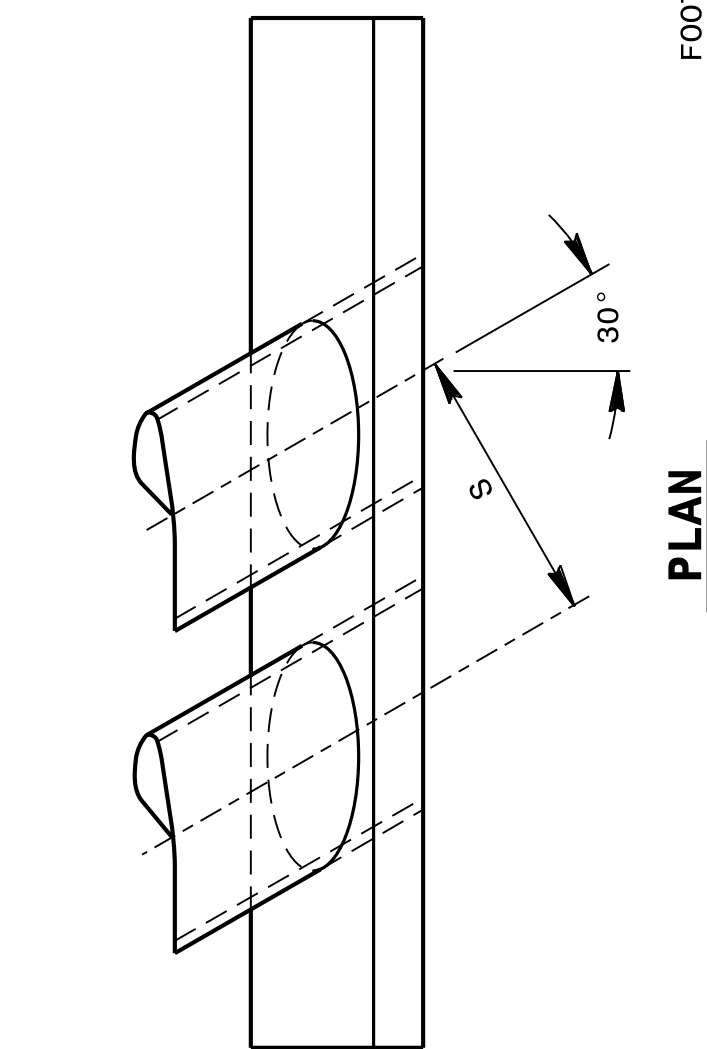

END ELEVATION

DIMENSIONS AND CONCRETE QUANTITIES																																									
USING CONCRETE PIPE						USING CORRUGATED STEEL PIPE																																			
COMMON DIMS.			SINGLE PIPE			DOUBLE PIPE			COMMON DIMS.			SINGLE PIPE			DOUBLE PIPE																										
D	H	B	T	G1	G2	S	S 30	L	30	YD ³	G1	G2	H	B	G1	G2	L	30	YD ³	G1	G2	S	S 30	L	30	YD ³															
15"	3'-4"	1'-6"	1 7/8"	2'-9"	3'-2"	2'-9"	3'-2"	5'-11"	0.792	2'-9"	3'-2"	2'-9"	3'-2"	1'-6"	1'-6"	2'-6"	2'-11"	5'-5"	0.616	2'-6"	2'-11"	2'-0"	2'-4"	7'-9"	0.848																
18"	3'-7"	1'-10"	2"	3'-2"	3'-8 1/4"	2'-7"	2'-11 3/4"	9'-10"	1.390	3'-3"	3'-3"	3'-3"	1'-8"	1'-8"	2'-11"	3'-4"	6'-3"	0.816	2'-11 1/8"	3'-4 1/8"	2'-3 1/2"	2'-8"	8'-11"	1.109																	
24"	4'-2"	2'-1"	2 1/2"	4'-0"	4'-8"	3'-5"	3'-11 1/2"	12'-8"	2.207	3'-9"	3'-9"	3'-9"	1'-11"	1'-11"	3'-8"	4'-3"	7'-11"	1.282	3'-8 1/4"	4'-3 1/4"	3'-0"	3'-5 1/2"	11'-5"	1.747																	
30"	4'-9"	2'-5"	2 3/4"	4'-7"	5'-4"	4'-3"	4'-10 3/4"	14'-10"	3.186	4'-3"	4'-3"	4'-3"	2'-2"	2'-2"	4'-5"	5'-1"	9'-6"	1.868	4'-5 1/8"	5'-1 1/8"	3'-8"	4'-2 3/4"	13'-9"	2.551																	
36"	5'-3"	2'-8"	3"	5'-6"	6'-4"	5'-0"	5'-9 1/4"	17'-8"	4.447	6'-4 3/8"	6'-4 3/8"	6'-4 3/8"	2'-5"	2'-5"	5'-2"	6'-0"	11'-2"	2.621	5'-2 3/8"	6'-0 3/8"	9'-6"	5'-2 1/4"	16'-5"	3.596																	
42"	5'-10"	2'-11"	3 1/2"	6'-4"	7'-4"	5'-10"	6'-8 3/4"	20'-5"	6.012	5'-3"	5'-3"	5'-3"	2'-8"	2'-8"	5'-11"	6'-10"	12'-9"	3.517	5'-11 1/4"	6'-10 3/8"	5'-3"	6'-0 3/4"	18'-10"	4.820																	
48"	6'-5"	3'-3"	4"	7'-2"	8'-3 1/4"	6'-8"	7'-8 1/4"	23'-2"	8.062	5'-9"	5'-9"	5'-9"	2'-11"	2'-11"	6'-8"	7'-8"	14'-4"	4.591	6'-8 3/8"	7'-6 3/8"	6'-0"	6'-11 1/4"	21'-4"	6.320																	
TOT. lbs.						11.7						11.7						11.7						11.7						11.7						11.7					

DIMENSIONS AND CONCRETE QUANTITIES																																			
USING CONCRETE PIPE						USING CORRUGATED STEEL PIPE																													
COMMON DIMS.			SINGLE PIPE			DOUBLE PIPE			COMMON DIMS.			SINGLE PIPE			DOUBLE PIPE																				
D	H	B	T	G1	G2	S	S 30	L	30	YD ³	G1	G2	H	B	G1	G2	L	30	YD ³	G1	G2	S	S 30	L	30	YD ³									
15"	3'-4"	1'-6"	1 7/8"	2'-9"	3'-2"	2'-9"	3'-2"	5'-11"	0.792	2'-9"	3'-2"	2'-9"	3'-2"	1'-6"	1'-6"	2'-6"	2'-11"	5'-5"	0.616	2'-6"	2'-11"	2'-0"	2'-4"	7'-9"	0.848										
18"	3'-7"	1'-10"	2"	3'-2"	3'-8 1/4"	2'-7"	2'-11 3/4"	9'-10"	1.390	3'-3"	3'-3"	3'-3"	1'-8"	1'-8"	2'-11"	3'-4"	6'-3"	0.816	2'-11 1/8"	3'-4 1/8"	2'-3 1/2"	2'-8"	8'-11"	1.109											
24"	4'-2"	2'-1"	2 1/2"	4'-0"	4'-8"	3'-5"	3'-11 1/2"	12'-8"	2.207	3'-9"	3'-9"	3'-9"	1'-11"	1'-11"	3'-8"	4'-3"	7'-11"	1.282	3'-8 1/4"	4'-3 1/4"	3'-0"	3'-5 1/2"	11'-5"	1.747											
30"	4'-9"	2'-5"	2 3/4"	4'-7"	5'-4"	4'-3"	4'-10 3/4"	14'-10"	3.186	4'-3"	4'-3"	4'-3"	2'-2"	2'-2"	4'-5"	5'-1"	9'-6"	1.868	4'-5 1/8"	5'-1 1/8"	3'-8"	4'-2 3/4"	13'-9"	2.551											
36"	5'-3"	2'-8"	3"	5'-6"	6'-4"	5'-0"	5'-9 1/4"	17'-8"	4.447	6'-4 3/8"	6'-4 3/8"	6'-4 3/8"	2'-5"	2'-5"	5'-2"	6'-0"	11'-2"	2.621	5'-2 3/8"	6'-0 3/8"	9'-6"	5'-2 1/4"	16'-5"	3.596											
42"	5'-10"	2'-11"	3 1/2"	6'-4"	7'-4"	5'-10"	6'-8 3/4"	20'-5"	6.012	5'-3"	5'-3"	5'-3"	2'-8"	2'-8"	5'-11"	6'-10"	12'-9"	3.517	5'-11 1/4"	6'-10 3/8"	5'-3"	6'-0 3/4"	18'-10"	4.820											
48"	6'-5"	3'-3"	4"	7'-2"	8'-3 1/4"	6'-8"	7'-8 1/4"	23'-2"	8.062	5'-9"	5'-9"	5'-9"	2'-11"	2'-11"	6'-8"	7'-8"	14'-4"	4.591	6'-8 3/8"	7'-6 3/8"	6'-0"	6'-11 1/4"	21'-4"	6.320											
TOT. lbs.						11.7						11.7						11.7						11.7						11.7					

SHEET 1 OF 2
838p02s1

**CONTRACT STANDARDS
AND DEVELOPMENT UNIT**
Office 919-707-6950 FAX 919-250-4119

SEE PLATE FOR TITLE

ORIGINAL BY: STD.NO.838.01 DATE: 4-17-99
MODIFIED BY: T.S. SPELL DATE: 12-10-08
CHECKED BY: DATE:
FILE SPEC.: s:user/details/metric/stand/838d02s1.dgn



Designed by:
Ronald Elton Davenport, Jr.
12/31/2022

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED