

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

NOTE: ALL EROSION CONTROL DEVICES SHOWN ARE LOCATED WITHIN EXISTING RW OR EASEMENT.

NOTE: PERIMETER EROSION CONTROL MEASURES SHALL BE INSTALLED DURING CLEARING AND GRUBBING PHASE.

NOTE: CONTRACTOR SHALL PROVIDE GROUND COVER ON EXPOSED SLOPES IN ACCORDANCE WITH THE "SOIL STABILIZATION TIMEFRAMES", SEE EC-3.

NOTE: PRIOR TO INSTALLATION OF EROSION CONTROL DEVICES, CONTRACTOR SHALL VERIFY BOUNDARIES OF JURISDICTIONAL AREAS AND DELINEATE WITH SAFETY FENCE OR FLAGGING.



PI Sta 180+96.63
 $\Delta = 1^{\circ} 23' 06.4" (LT)$
 $D = 0^{\circ} 44' 38.8"$
 $L = 1,530.05'$
 $T = 767.55'$
 $R = 7,700.00'$
 $DS = 75 \text{ mph}$
 $e = 04'$
 $RO = 200.00'$

PIs Sta 189+25.79
 $\Theta_s = 0^{\circ} 44' 38.8"$
 $L_s = 200.00'$
 $LT = 133.33'$
 $ST = 66.67'$

NAD 83/NA 2011

MATCHLINE -L- STA. 186+00 SEE SHEET 11

MATCHLINE -L- STA. 200+00 SEE SHEET 13

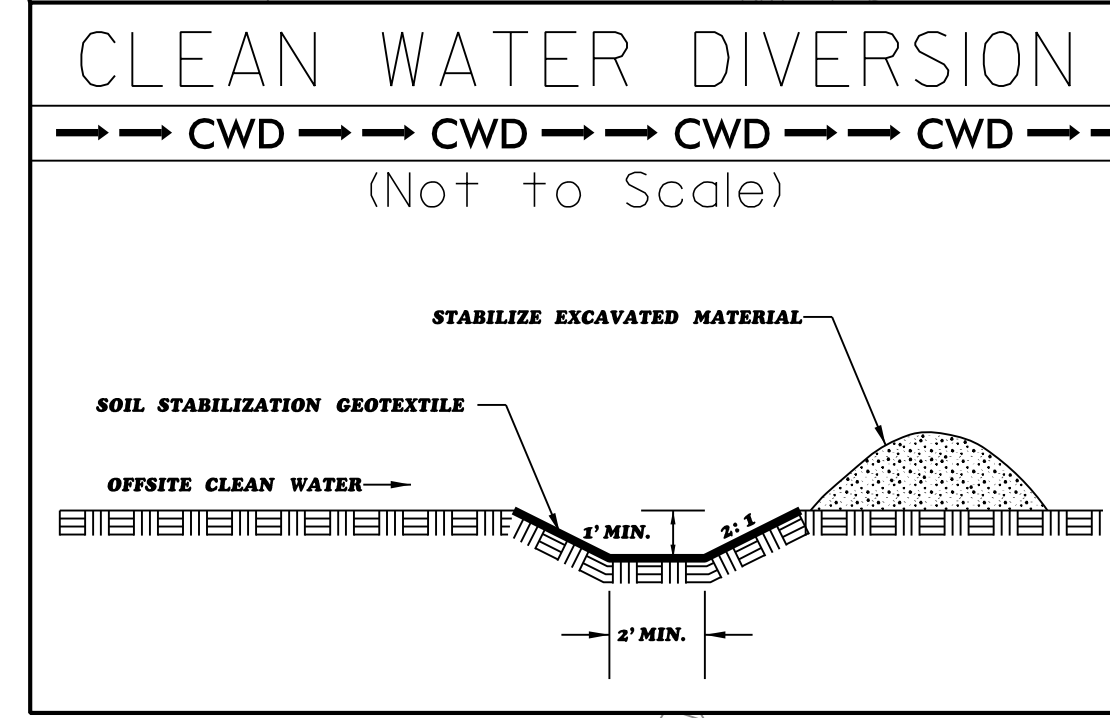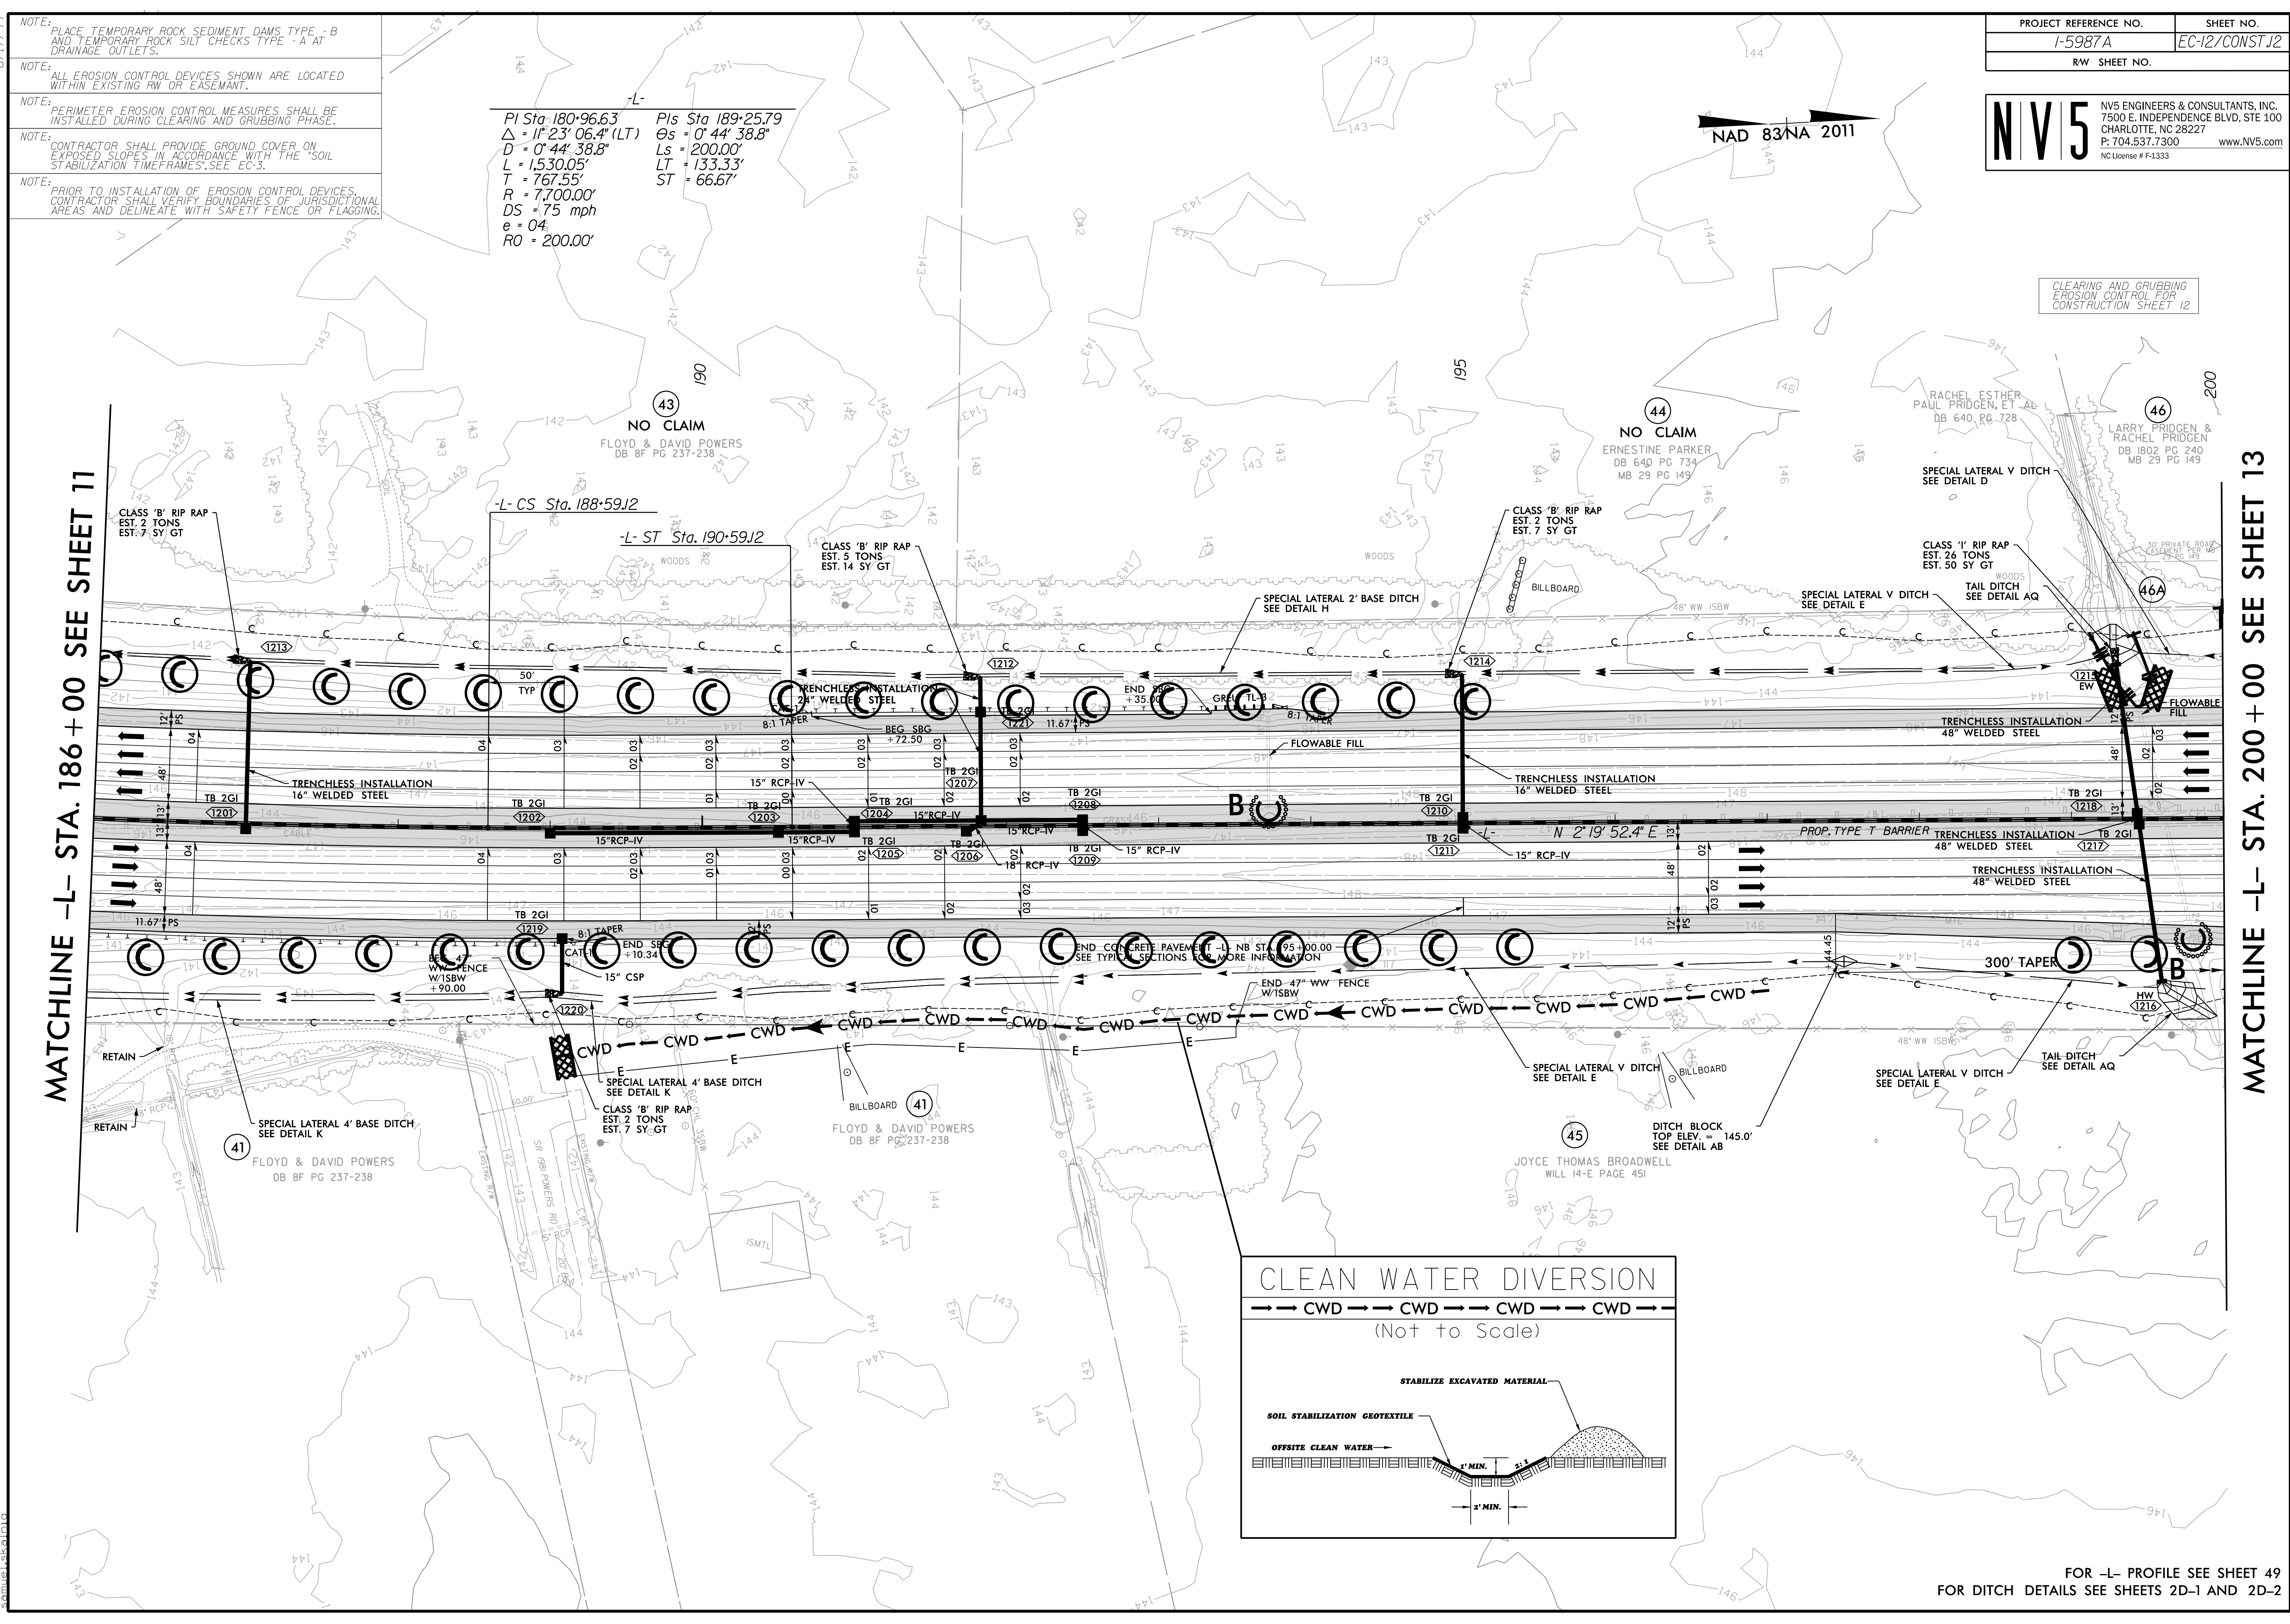

4/7/2022
 R:\E:\Environmental\Design\15987A_EC_PSH_012.dgn
 samuel.sokolato