

NAD 83/NA 2011

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.

NOTE: ALL EROSION CONTROL DEVICES SHOWN ARE LOCATED WITHIN EXISTING RW OR EASEMENT.

NOTE: PERIMETER EROSION CONTROL MEASURES SHALL BE INSTALLED DURING CLEARING AND GRUBBING PHASE.


NOTE: CONTRACTOR SHALL PROVIDE GROUND COVER ON EXPOSED SLOPES IN ACCORDANCE WITH THE 'SOIL STABILIZATION TIMEFRAMES', SEE EC-3.

NOTE: PRIOR TO INSTALLATION OF EROSION CONTROL DEVICES, CONTRACTOR SHALL VERIFY BOUNDARIES OF JURISDICTIONAL AREAS AND DELINEATE WITH SAFETY FENCE OR FLAGGING.

-L-
 PI Sta 430+68.94
 $\Delta = 3' 33' 35.7" (RT)$
 $D = 0' 12' 03.7"$
 $L = 1770.78'$
 $R = 28,500.00'$
 $DS = 75 \text{ mph}$
 $e = NC$


CLEAN WATER DIVERSION

→ CWD → CWD → CWD → CWD →
 (Not to Scale)

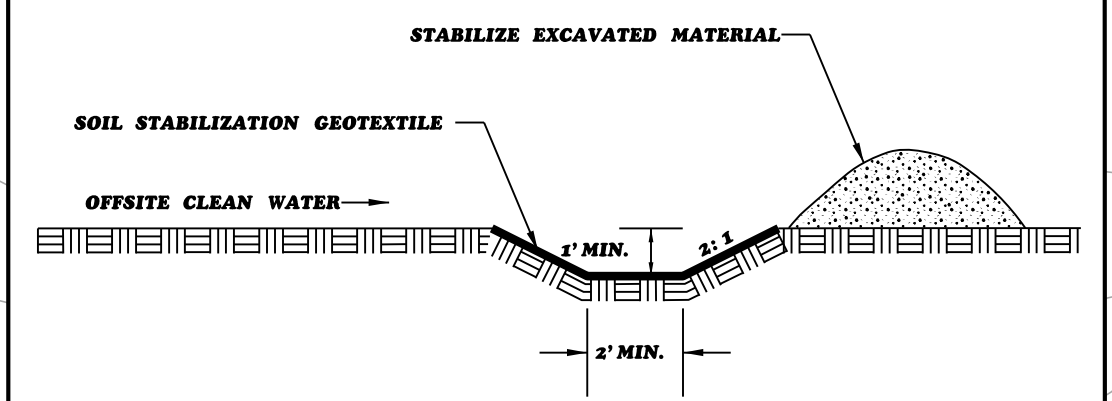

MATCHLINE -L- STA 432 + 00.00 SEE SHEET 27

MATCHLINE -L- STA 445 + 00.00 SEE SHEET 29

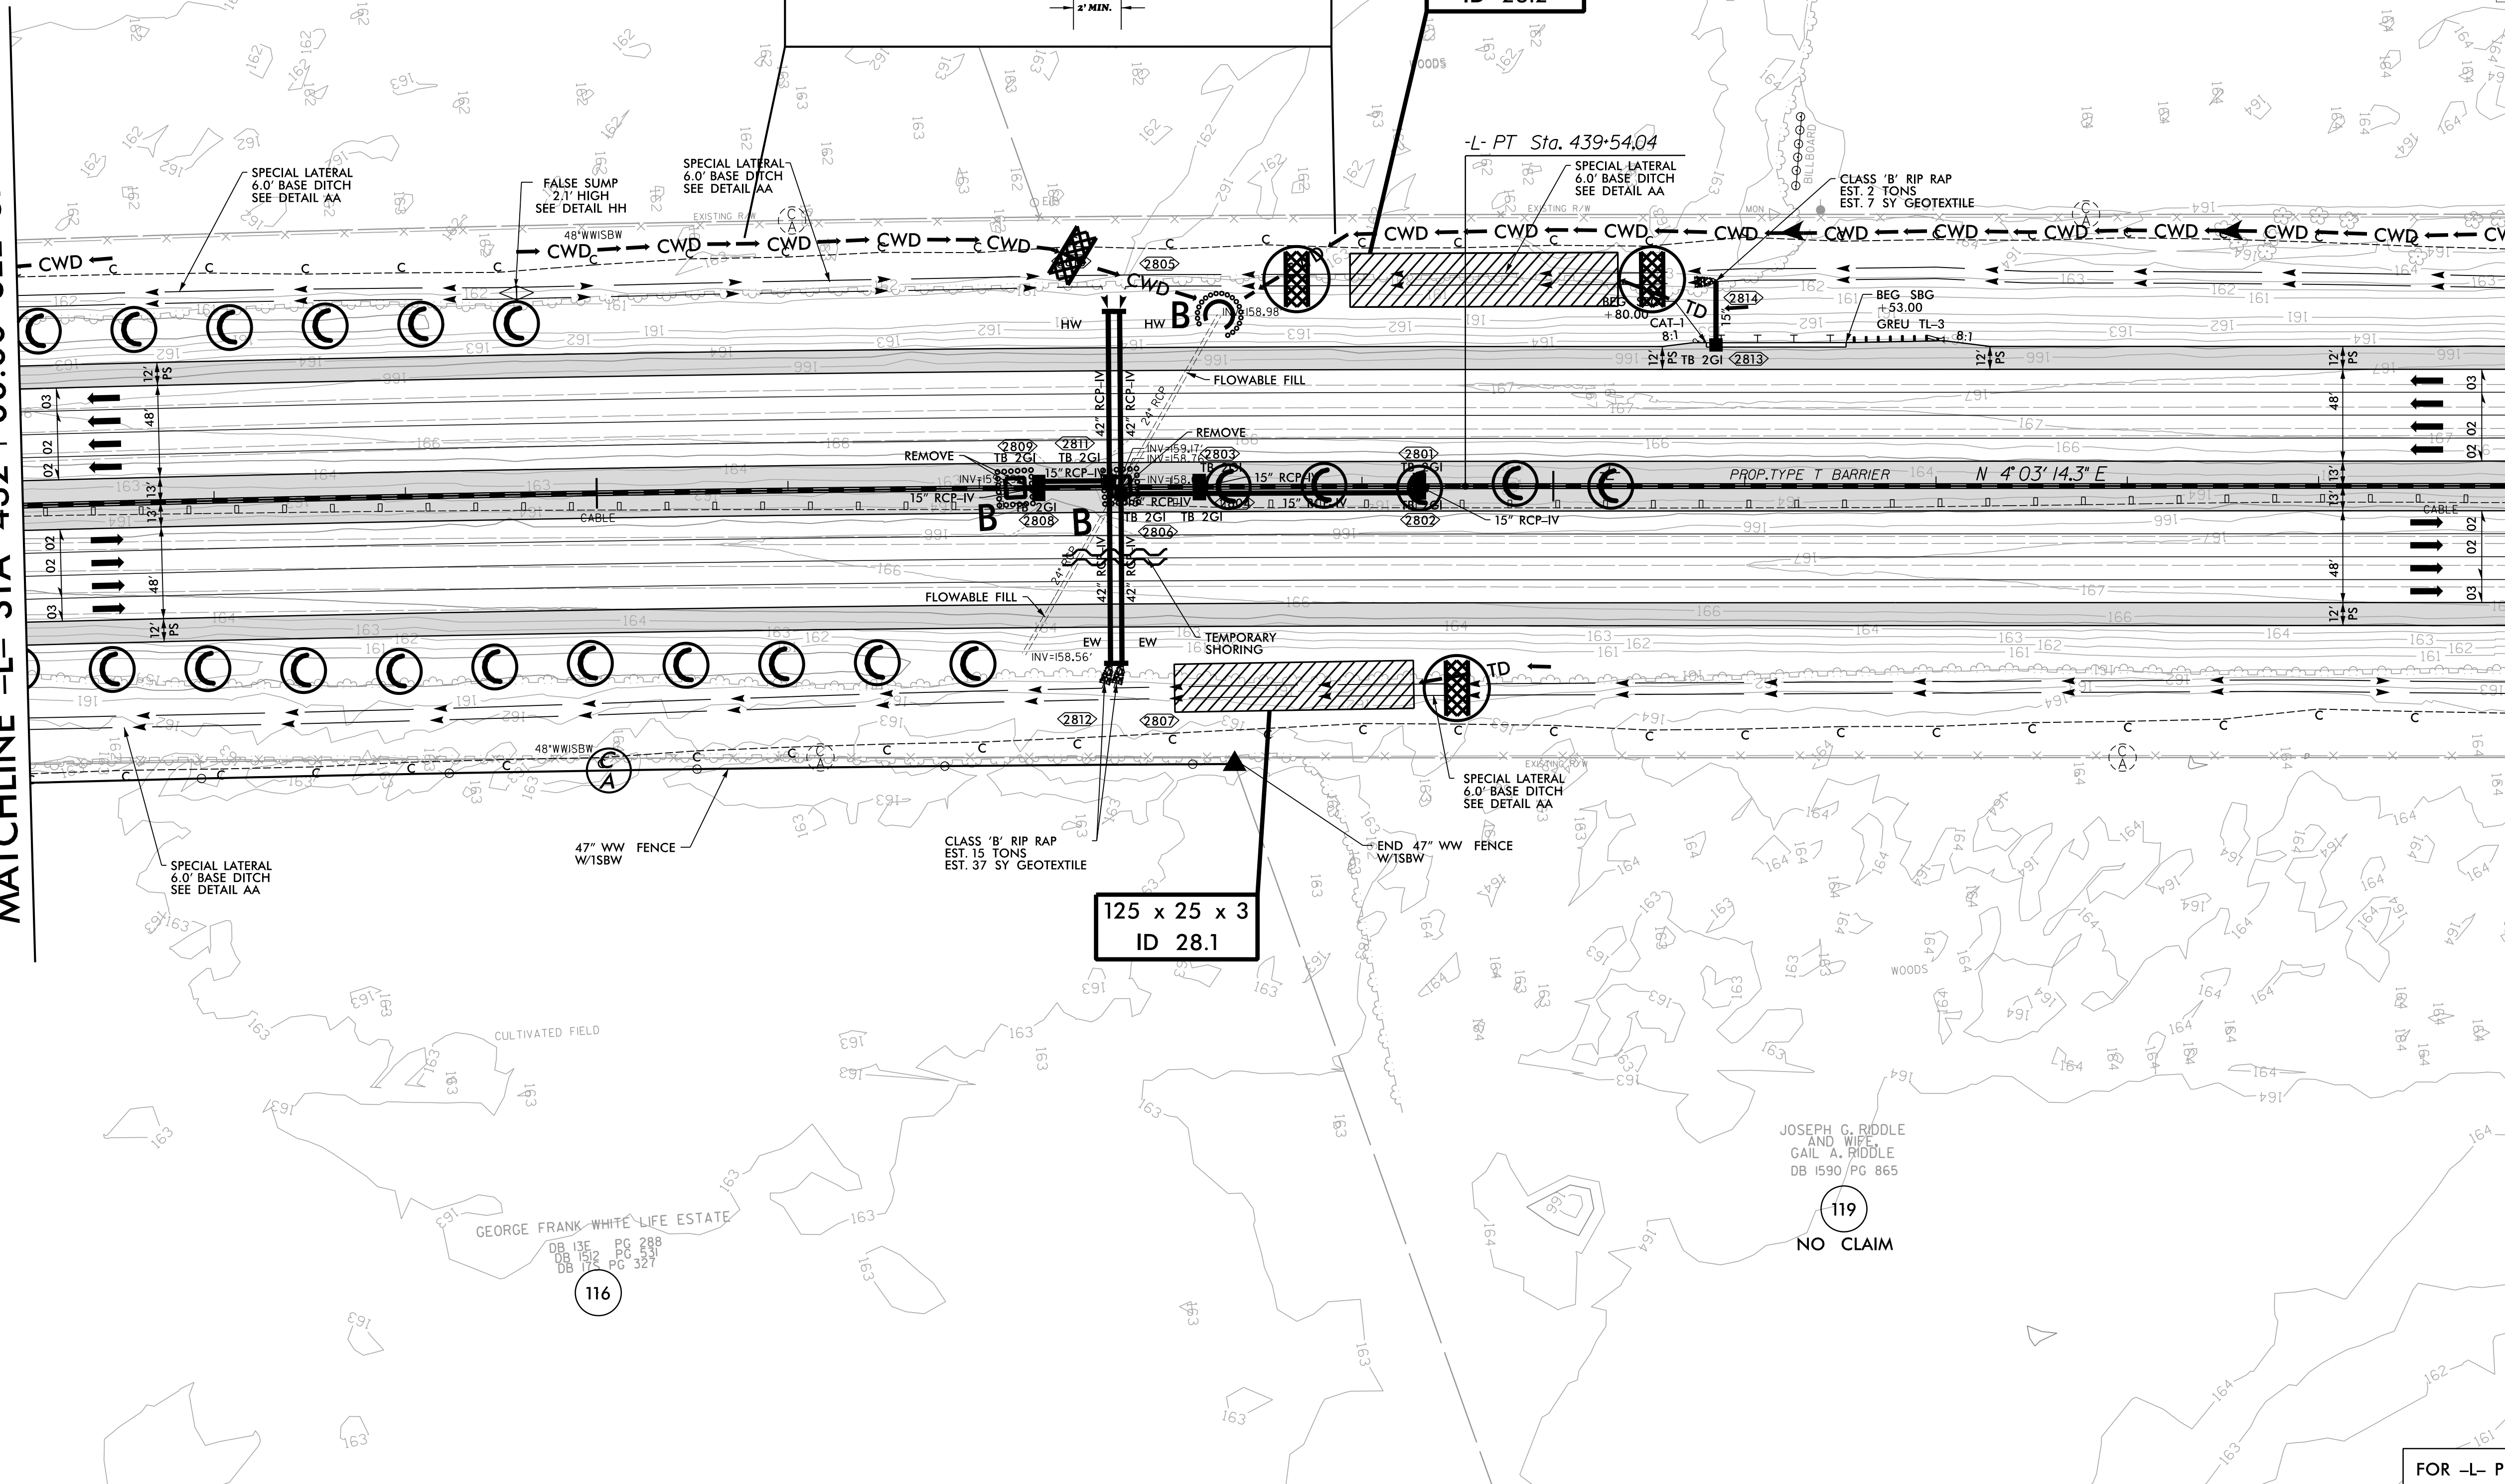

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 28

REVISIONS

4/7/2022
 R:\Environmental\Design\15987A_EC_PSH_028.dgn
 samuel.sokalato

FOR -L- PROFILE SEE SHEET 67