

NOTE: PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B AND TEMPORARY ROCK SILT CHECKS TYPE - A AT DRAINAGE OUTLETS.


NOTE: ALL EROSION CONTROL DEVICES SHOWN ARE LOCATED WITHIN EXISTING RW OR EASEMENT.

NOTE: PERIMETER EROSION CONTROL MEASURES SHALL BE INSTALLED DURING CLEARING AND GRUBBING PHASE.


NOTE: CONTRACTOR SHALL PROVIDE GROUND COVER ON EXPOSED SLOPES IN ACCORDANCE WITH THE "SOIL STABILIZATION TIMEFRAMES," SEE EC-3.

NOTE: PRIOR TO INSTALLATION OF EROSION CONTROL DEVICES, CONTRACTOR SHALL VERIFY BOUNDARIES OF JURISDICTIONAL AREAS AND DELINEATE WITH SAFETY FENCE OR FLAGGING.

CLEARING AND GRUBBING EROSION CONTROL FOR CONSTRUCTION SHEET 35

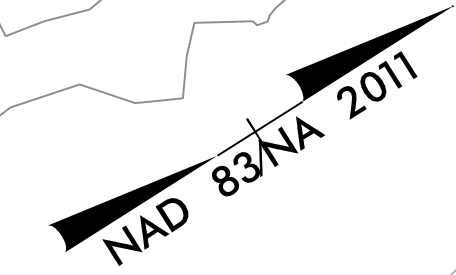

REVISIONS

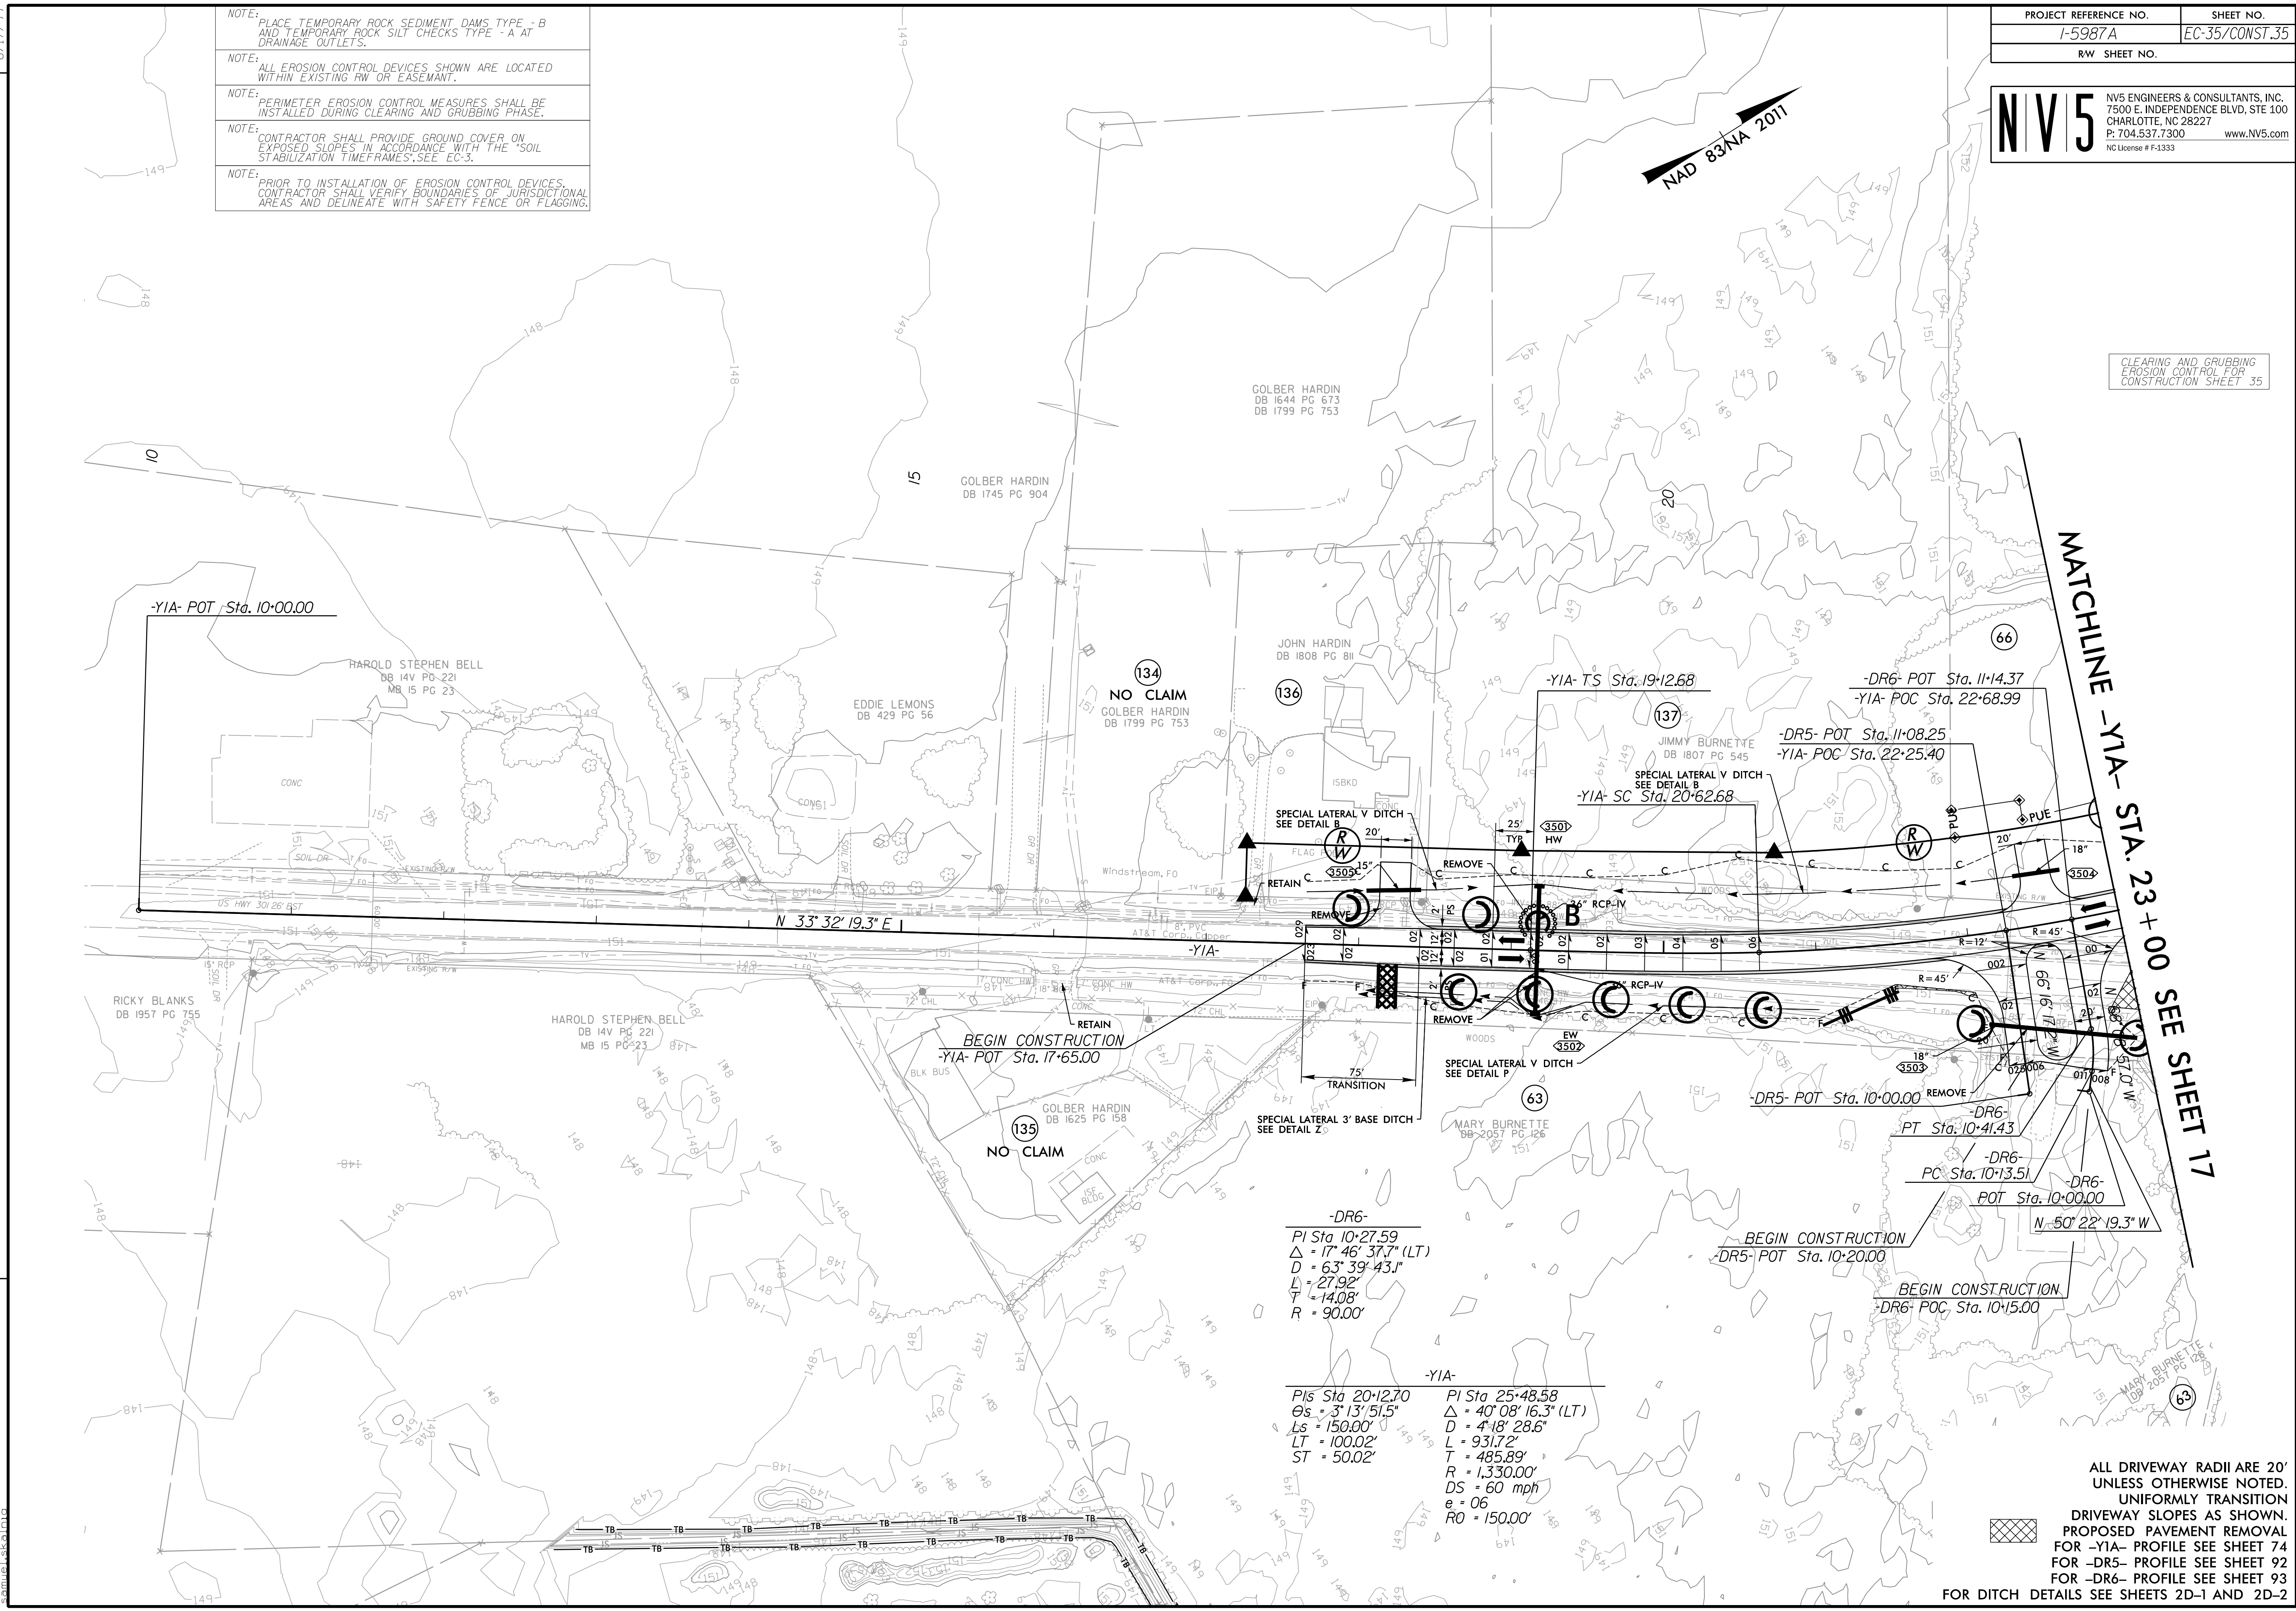

MATCHLINE -YIA- STA. 23+00 SEE SHEET 17

**-DR6-**  
 PI Sta 10+27.59  
 $\Delta = 17' 46' 37.7''$  (LT)  
 $D = 63' 39' 43.1''$   
 $L = 27.92'$   
 $T = 14.08'$   
 $R = 90.00'$

**-YIA-**  
 PIs Sta 20+12.70  
 $\Delta s = 3' 13' 51.5''$   
 $Ls = 150.00'$   
 $LT = 100.02'$   
 $ST = 50.02'$

**-YIA-**  
 PI Sta 25+48.58  
 $\Delta = 40' 08' 16.3''$  (LT)  
 $D = 4' 18' 28.6''$   
 $L = 931.72'$   
 $T = 485.89'$   
 $R = 1,330.00'$   
 $DS = 60$  mph  
 $e = 06$   
 $RO = 150.00'$

ALL DRIVEWAY RADII ARE 20' UNLESS OTHERWISE NOTED.  
 UNIFORMLY TRANSITION DRIVEWAY SLOPES AS SHOWN.  
 PROPOSED PAVEMENT REMOVAL FOR -YIA- PROFILE SEE SHEET 74  
 FOR -DR5- PROFILE SEE SHEET 92  
 FOR -DR6- PROFILE SEE SHEET 93  
 FOR DITCH DETAILS SEE SHEETS 2D-1 AND 2D-2

A:\7\2022\RA\Environmental\Design\15987A\_EC\_PSH\_035.dwg  
 samuel.sokalata