

REFERENCE: I-5987A

PROJECT: 47533

STATE OF NORTH CAROLINA
DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE
SUBSURFACE INVESTIGATION

COUNTY ROBESON
PROJECT DESCRIPTION I-95 IMPROVEMENTS FROM
SOUTH OF US 301 (EXIT 22) TO NORTH OF
SR 1758 (McDUFFIE CROSSING ROAD)
SITE DESCRIPTION SITE 1 - ABUTMENT RETAINING
WALLS AT END BENT 1 AND END BENT 2 OF
BRIDGE ON -Y2- (SR 1529 - POWERSVILLE ROAD)
OVER -L- (I-95) AT -Y2- STA. 29+75.79

CONTENTS

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	LEGEND (SOIL & ROCK)
3	SITE PLAN
4 - 5	PROFILES
6 - 10	BORE LOGS
11	SOIL TEST RESULTS

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	I-5987A	1	11

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT (919) 707-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

- NOTES:
- THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
 - BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

PERSONNEL
DEGON, A. N.
TURNAGE, J. R.
KELLY, N. S.

INVESTIGATED BY TERRACON CONSULTANTS
DRAWN BY FIELDS, W. D.
CHECKED BY RIGGS, Jr., A. F.
SUBMITTED BY ALEXANDER, M. J.
DATE JANUARY 2021

Prepared in the Office of:
Terracon
Consulting Engineers and Scientists
2401 BRENTWOOD ROAD, SUITE 107
RALEIGH, NORTH CAROLINA 27604
NC REGISTERED ENGINEERING FIRM: F-0869
NC REGISTERED GEOLOGIC FIRM: C-367



DocuSigned by:
Matthew J. Alexander 01/28/2022
0FB0038EEA06452
SIGNATURE DATE

DOCUMENT NOT CONSIDERED FINAL
UNLESS ALL SIGNATURES COMPLETED


**NORTH CAROLINA DEPARTMENT OF TRANSPORTATION
DIVISION OF HIGHWAYS
GEOTECHNICAL ENGINEERING UNIT**

SUBSURFACE INVESTIGATION

SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS

SOIL DESCRIPTION										GRADATION										ROCK DESCRIPTION										TERMS AND DEFINITIONS																																																																																																																																									
<p>SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (AASHTO T 206, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, <i>VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6</i></p>										<p>WELL GRADED - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. UNIFORMLY GRADED - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. GAP-GRADED - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.</p>										<p>HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED, AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:</p>										<p>ALLUVIUM (ALLUV.) - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. AQUIFER - A WATER BEARING FORMATION OR STRATA. ARENACEOUS - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. ARGILLACEOUS - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC. ARTESIAN - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. CALCAREOUS (CALC.) - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. COLLUVIUM - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. CORE RECOVERY (REC.) - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. DIKE - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. DIP - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. DIP DIRECTION (DIP AZIMUTH) - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. FAULT - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. FISSILE - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. FLOAT - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOGGED FROM PARENT MATERIAL. FLOOD PLAIN (FP) - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. FORMATION (FM) - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. JOINT - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. LEDGE - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. LENS - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. MOTTLED (MOT.) - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS. MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. PERCHED WATER - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. RESIDUAL (RES.) SOIL - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. ROCK QUALITY DESIGNATION (RQD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. SAPROLITE (SAP.) - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. SILL - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. SLICKENSIDE - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT) - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. STRATA CORE RECOVERY (SREC.) - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. STRATA ROCK QUALITY DESIGNATION (SROD) - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. TOPSOIL (TS.) - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.</p>																																																																																																																																									
SOIL LEGEND AND AASHTO CLASSIFICATION										ANGULARITY OF GRAINS										WEATHERED ROCK (WR)										NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT N VALUES > 100 BLOWS PER FOOT IF TESTED.																																																																																																																																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>GENERAL CLASS.</th> <th colspan="5">GRANULAR MATERIALS (≤ 35% PASSING #200)</th> <th colspan="5">SILT-CLAY MATERIALS (> 35% PASSING #200)</th> <th colspan="5">ORGANIC MATERIALS</th> </tr> <tr> <th>GROUP CLASS.</th> <th>A-1</th> <th>A-1-b</th> <th>A-2</th> <th>A-2-4</th> <th>A-2-5</th> <th>A-2-6</th> <th>A-2-7</th> <th>A-4</th> <th>A-5</th> <th>A-6</th> <th>A-7</th> <th>A-1, A-2</th> <th>A-3</th> <th>A-4, A-5</th> <th>A-6, A-7</th> </tr> </thead> <tbody> <tr> <td>SYMBOL</td> <td colspan="5">[Pattern]</td> <td colspan="5">[Pattern]</td> <td colspan="5">[Pattern]</td> </tr> <tr> <td>% PASSING #10 #40 #200</td> <td colspan="5">[Table]</td> <td colspan="5">[Table]</td> <td colspan="5">[Table]</td> </tr> <tr> <td>MATERIAL PASSING #40 LL PI</td> <td colspan="5">[Table]</td> <td colspan="5">[Table]</td> <td colspan="5">[Table]</td> </tr> <tr> <td>GROUP INDEX</td> <td colspan="5">[Table]</td> <td colspan="5">[Table]</td> <td colspan="5">[Table]</td> </tr> <tr> <td>USUAL TYPES OF MAJOR MATERIALS</td> <td colspan="5">[Table]</td> <td colspan="5">[Table]</td> <td colspan="5">[Table]</td> </tr> <tr> <td>GEN. RATING AS SUBGRADE</td> <td colspan="5">[Table]</td> <td colspan="5">[Table]</td> <td colspan="5">[Table]</td> </tr> </tbody> </table>										GENERAL CLASS.	GRANULAR MATERIALS (≤ 35% PASSING #200)					SILT-CLAY MATERIALS (> 35% PASSING #200)					ORGANIC MATERIALS					GROUP CLASS.	A-1	A-1-b	A-2	A-2-4	A-2-5	A-2-6	A-2-7	A-4	A-5	A-6	A-7	A-1, A-2	A-3	A-4, A-5	A-6, A-7	SYMBOL	[Pattern]					[Pattern]					[Pattern]					% PASSING #10 #40 #200	[Table]					[Table]					[Table]					MATERIAL PASSING #40 LL PI	[Table]					[Table]					[Table]					GROUP INDEX	[Table]					[Table]					[Table]					USUAL TYPES OF MAJOR MATERIALS	[Table]					[Table]					[Table]					GEN. RATING AS SUBGRADE	[Table]					[Table]					[Table]					<p>THE ANGULARITY OR ROUNDNESS OF SOIL GRAINS IS DESIGNATED BY THE TERMS: ANGULAR, SUBANGULAR, SUBROUNDED, OR ROUNDED.</p>										<p>CRYSTALLINE ROCK (CR) FINE TO COARSE GRAIN IGNEOUS AND METAMORPHIC ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES GRANITE, GNEISS, GABBRO, SCHIST, ETC.</p> <p>NON-CRYSTALLINE ROCK (NCR) FINE TO COARSE GRAIN METAMORPHIC AND NON-COASTAL PLAIN SEDIMENTARY ROCK THAT WOULD YIELD SPT REFUSAL IF TESTED. ROCK TYPE INCLUDES PHYLLITE, SLATE, SANDSTONE, ETC.</p> <p>COASTAL PLAIN SEDIMENTARY ROCK (CPI) COASTAL PLAIN SEDIMENTS CEMENTED INTO ROCK, BUT MAY NOT YIELD SPT REFUSAL. ROCK TYPE INCLUDES LIMESTONE, SANDSTONE, CEMENTED SHELL BEDS, ETC.</p>										<p>CR - CRYSTALLINE ROCK (CR) NCR - NON-CRYSTALLINE ROCK (NCR) CPI - COASTAL PLAIN SEDIMENTARY ROCK (CPI)</p>									
GENERAL CLASS.	GRANULAR MATERIALS (≤ 35% PASSING #200)					SILT-CLAY MATERIALS (> 35% PASSING #200)					ORGANIC MATERIALS																																																																																																																																																												
GROUP CLASS.	A-1	A-1-b	A-2	A-2-4	A-2-5	A-2-6	A-2-7	A-4	A-5	A-6	A-7	A-1, A-2	A-3	A-4, A-5	A-6, A-7																																																																																																																																																								
SYMBOL	[Pattern]					[Pattern]					[Pattern]																																																																																																																																																												
% PASSING #10 #40 #200	[Table]					[Table]					[Table]																																																																																																																																																												
MATERIAL PASSING #40 LL PI	[Table]					[Table]					[Table]																																																																																																																																																												
GROUP INDEX	[Table]					[Table]					[Table]																																																																																																																																																												
USUAL TYPES OF MAJOR MATERIALS	[Table]					[Table]					[Table]																																																																																																																																																												
GEN. RATING AS SUBGRADE	[Table]					[Table]					[Table]																																																																																																																																																												
MINERALOGICAL COMPOSITION										COMPRESSION										WEATHERING										CR																																																																																																																																									
<p>MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.</p>										<p>SLIGHTLY COMPRESSIBLE LL < 31 MODERATELY COMPRESSIBLE LL = 31 - 50 HIGHLY COMPRESSIBLE LL > 50</p>										<p>FRESH ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING. ROCK RINGS UNDER HAMMER IF CRYSTALLINE.</p> <p>VERY SLIGHT (V SLI) ROCK GENERALLY FRESH, JOINTS STAINED. SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN. CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY. ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE.</p> <p>SLIGHT (SLI) ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH. OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED. CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS.</p> <p>MODERATE (MOD) SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL AND DISCOLORED. SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK.</p> <p>MODERATELY SEVERE (MOD. SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION. ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK. <i>IF TESTED, WOULD YIELD SPT REFUSAL</i></p> <p>SEVERE (SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT. SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN. <i>IF TESTED, WOULD YIELD SPT N VALUES > 100 BPF</i></p> <p>VERY SEVERE (V SEV.) ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED. ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING. SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE THAT ONLY MINOR VESTIGES OF ORIGINAL ROCK FABRIC REMAIN. <i>IF TESTED, WOULD YIELD SPT N VALUES < 100 BPF</i></p> <p>COMPLETE ROCK REDUCED TO SOIL. ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS. QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS. SAPROLITE IS ALSO AN EXAMPLE.</p>										<p>CR - CRYSTALLINE ROCK (CR) NCR - NON-CRYSTALLINE ROCK (NCR) CPI - COASTAL PLAIN SEDIMENTARY ROCK (CPI)</p>																																																																																																																																									
PERCENTAGE OF MATERIAL										GROUND WATER										MISCELLANEOUS SYMBOLS										ROCK HARDNESS																																																																																																																																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>ORGANIC MATERIAL</th> <th>GRANULAR SOILS</th> <th>SILT - CLAY SOILS</th> <th>OTHER MATERIAL</th> </tr> </thead> <tbody> <tr> <td>TRACE OF ORGANIC MATTER</td> <td>2 - 3%</td> <td>3 - 5%</td> <td>TRACE 1 - 10%</td> </tr> <tr> <td>LITTLE ORGANIC MATTER</td> <td>3 - 5%</td> <td>5 - 12%</td> <td>LITTLE 10 - 20%</td> </tr> <tr> <td>MODERATELY ORGANIC</td> <td>5 - 10%</td> <td>12 - 20%</td> <td>SOME 20 - 35%</td> </tr> <tr> <td>HIGHLY ORGANIC</td> <td>> 10%</td> <td>> 20%</td> <td>HIGHLY 35% AND ABOVE</td> </tr> </tbody> </table>										ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL	TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%	LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%	MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%	HIGHLY ORGANIC	> 10%	> 20%	HIGHLY 35% AND ABOVE	<p>▽ WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING ▽ STATIC WATER LEVEL AFTER 24 HOURS ▽ PW PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA ○ SPRING OR SEEP</p>										<p>ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION SOIL SYMBOL ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT INFERRED SOIL BOUNDARY INFERRED ROCK LINE ALLUVIAL SOIL BOUNDARY</p> <p>DIP & DIP DIRECTION OF ROCK STRUCTURES SPT DMT TEST BORE AUGER BORING CORE BORING MONITORING WELL PIEZOMETER INSTALLATION</p> <p>SLOPE INDICATOR INSTALLATION CONE PENETROMETER TEST SOUNDING ROD TEST BORING WITH CORE SPT N-VALUE</p>										<p>VERY HARD CANNOT BE SCRATCHED BY KNIFE OR SHARP PICK. BREAKING OF HAND SPECIMENS REQUIRES SEVERAL HARD BLOWS OF THE GEOLOGIST'S PICK.</p> <p>HARD CAN BE SCRATCHED BY KNIFE OR PICK ONLY WITH DIFFICULTY. HARD HAMMER BLOWS REQUIRED TO DETACH HAND SPECIMEN.</p> <p>MODERATELY HARD CAN BE SCRATCHED BY KNIFE OR PICK. GOUGES OR GROOVES TO 0.25 INCHES DEEP CAN BE EXCAVATED BY HARD BLOW OF A GEOLOGIST'S PICK. HAND SPECIMENS CAN BE DETACHED BY MODERATE BLOWS.</p> <p>MEDIUM HARD CAN BE GROUDED OR GOUGED 0.05 INCHES DEEP BY FIRM PRESSURE OF KNIFE OR PICK POINT. CAN BE EXCAVATED IN SMALL CHIPS TO PIECES 1 INCH MAXIMUM SIZE BY HARD BLOWS OF THE POINT OF A GEOLOGIST'S PICK.</p> <p>SOFT CAN BE GROUDED OR GOUGED READILY BY KNIFE OR PICK. CAN BE EXCAVATED IN FRAGMENTS FROM CHIPS TO SEVERAL INCHES IN SIZE BY MODERATE BLOWS OF A PICK POINT. SMALL, THIN PIECES CAN BE BROKEN BY FINGER PRESSURE.</p> <p>VERY SOFT CAN BE CARVED WITH KNIFE. CAN BE EXCAVATED READILY WITH POINT OF PICK. PIECES 1 INCH OR MORE IN THICKNESS CAN BE BROKEN BY FINGER PRESSURE. CAN BE SCRATCHED READILY BY FINGER NAIL.</p>																																																																																																																					
ORGANIC MATERIAL	GRANULAR SOILS	SILT - CLAY SOILS	OTHER MATERIAL																																																																																																																																																																				
TRACE OF ORGANIC MATTER	2 - 3%	3 - 5%	TRACE 1 - 10%																																																																																																																																																																				
LITTLE ORGANIC MATTER	3 - 5%	5 - 12%	LITTLE 10 - 20%																																																																																																																																																																				
MODERATELY ORGANIC	5 - 10%	12 - 20%	SOME 20 - 35%																																																																																																																																																																				
HIGHLY ORGANIC	> 10%	> 20%	HIGHLY 35% AND ABOVE																																																																																																																																																																				
CONSISTENCY OR DENSENESS										RECOMMENDATION SYMBOLS										ABBREVIATIONS										FRACTURE SPACING																																																																																																																																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>PRIMARY SOIL TYPE</th> <th>COMPACTNESS OR CONSISTENCY</th> <th>RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)</th> <th>RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT²)</th> </tr> </thead> <tbody> <tr> <td>GENERALLY GRANULAR MATERIAL (NON-COHESIVE)</td> <td>VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE</td> <td>< 4 4 TO 10 10 TO 30 30 TO 50 > 50</td> <td>N/A</td> </tr> <tr> <td>GENERALLY SILT-CLAY MATERIAL (COHESIVE)</td> <td>VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD</td> <td>< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30</td> <td>< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4</td> </tr> </tbody> </table>										PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)	GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A	GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4	<p>UNDERCUT SHALLOW UNDERCUT UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK</p>										<p>AR - AUGER REFUSAL BT - BORING TERMINATED CL - CLAY CPT - CONE PENETRATION TEST CSE - COARSE DMT - DILATOMETER TEST DPT - DYNAMIC PENETRATION TEST e - VOID RATIO F - FINE FOSS. - FOSSILIFEROUS FRAC. - FRACTURED, FRACTURES FRAGS. - FRAGMENTS HI. - HIGHLY MED. - MEDIUM MICA - MICACEOUS MOD. - MODERATELY NP - NON PLASTIC ORG. - ORGANIC PMT - PRESSUREMETER TEST SAP. - SAPROLITIC SD. - SAND, SANDY SL. - SILT, SILTY SLI. - SLIGHTLY TCR - TRICONE REFUSAL w - MOISTURE CONTENT V - VERY VST - VANE SHEAR TEST WEA. - WEATHERED γ - UNIT WEIGHT γ_d - DRY UNIT WEIGHT S - BULK SS - SPLIT SPOON ST - SHELBY TUBE RS - ROCK RT - RECOMPACTED TRIAXIAL CBR - CALIFORNIA BEARING RATIO</p>										<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>TERM</th> <th>SPACING</th> <th>TERM</th> <th>THICKNESS</th> </tr> </thead> <tbody> <tr> <td>VERY WIDE</td> <td>MORE THAN 10 FEET</td> <td>VERY THICKLY BEDDED</td> <td>4 FEET</td> </tr> <tr> <td>WIDE</td> <td>3 TO 10 FEET</td> <td>THICKLY BEDDED</td> <td>1.5 - 4 FEET</td> </tr> <tr> <td>MODERATELY CLOSE</td> <td>1 TO 3 FEET</td> <td>THINLY BEDDED</td> <td>0.16 - 1.5 FEET</td> </tr> <tr> <td>CLOSE</td> <td>0.16 TO 1 FOOT</td> <td>VERY THINLY BEDDED</td> <td>0.03 - 0.16 FEET</td> </tr> <tr> <td>VERY CLOSE</td> <td>LESS THAN 0.16 FEET</td> <td>THICKLY LAMINATED</td> <td>0.008 - 0.03 FEET</td> </tr> <tr> <td></td> <td></td> <td>THINLY LAMINATED</td> <td>< 0.008 FEET</td> </tr> </tbody> </table>										TERM	SPACING	TERM	THICKNESS	VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	4 FEET	WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET	MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET	CLOSE	0.16 TO 1 FOOT	VERY THINLY BEDDED	0.03 - 0.16 FEET	VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET			THINLY LAMINATED	< 0.008 FEET																																																																																								
PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT ²)																																																																																																																																																																				
GENERALLY GRANULAR MATERIAL (NON-COHESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A																																																																																																																																																																				
GENERALLY SILT-CLAY MATERIAL (COHESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4																																																																																																																																																																				
TERM	SPACING	TERM	THICKNESS																																																																																																																																																																				
VERY WIDE	MORE THAN 10 FEET	VERY THICKLY BEDDED	4 FEET																																																																																																																																																																				
WIDE	3 TO 10 FEET	THICKLY BEDDED	1.5 - 4 FEET																																																																																																																																																																				
MODERATELY CLOSE	1 TO 3 FEET	THINLY BEDDED	0.16 - 1.5 FEET																																																																																																																																																																				
CLOSE	0.16 TO 1 FOOT	VERY THINLY BEDDED	0.03 - 0.16 FEET																																																																																																																																																																				
VERY CLOSE	LESS THAN 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET																																																																																																																																																																				
		THINLY LAMINATED	< 0.008 FEET																																																																																																																																																																				
TEXTURE OR GRAIN SIZE										SOIL MOISTURE - CORRELATION OF TERMS										EQUIPMENT USED ON SUBJECT PROJECT										INDURATION																																																																																																																																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>U.S. STD. SIEVE SIZE OPENING (MM)</th> <th>4</th> <th>10</th> <th>40</th> <th>60</th> <th>200</th> <th>270</th> </tr> </thead> <tbody> <tr> <td></td> <td>4.76</td> <td>2.00</td> <td>0.42</td> <td>0.25</td> <td>0.075</td> <td>0.053</td> </tr> </tbody> </table>										U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270		4.76	2.00	0.42	0.25	0.075	0.053	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>BOULDER (BLDR.)</th> <th>COBBLE (COB.)</th> <th>GRAVEL (GR.)</th> <th>COARSE SAND (CSE. SD.)</th> <th>FINE SAND (F SD.)</th> <th>SILT (SL.)</th> <th>CLAY (CL.)</th> </tr> </thead> <tbody> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>										BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)								<p>LL - LIQUID LIMIT PL - PLASTIC LIMIT OM - OPTIMUM MOISTURE SHRINKAGE LIMIT</p> <p>LIQUID LIMIT - SATURATED - (SAT.) USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE</p> <p>WET - (W) SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE</p> <p>MOIST - (M) SOLID; AT OR NEAR OPTIMUM MOISTURE</p> <p>DRY - (D) REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</p>										<p>DRILL UNITS: <input type="checkbox"/> CME-45C <input type="checkbox"/> CME-55 <input type="checkbox"/> CME-550 <input type="checkbox"/> VANE SHEAR TEST <input type="checkbox"/> PORTABLE HOIST <input checked="" type="checkbox"/> DIETRICH D-50 (1ER29)</p> <p>ADVANCING TOOLS: <input type="checkbox"/> CLAY BITS <input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER <input type="checkbox"/> 8" HOLLOW AUGERS <input type="checkbox"/> HARD FACED FINGER BITS <input type="checkbox"/> TUNG-CARBIDE INSERTS <input type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER <input checked="" type="checkbox"/> TRICONE 2% * STEEL TEETH <input type="checkbox"/> TRICONE * TUNG-CARB. <input type="checkbox"/> CORE BIT <input checked="" type="checkbox"/> 3/4" HOLLOW STEM AUGERS</p> <p>HAMMER TYPE: <input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL</p> <p>CORE SIZE: <input type="checkbox"/> -B <input type="checkbox"/> -H <input type="checkbox"/> -N</p> <p>HAND TOOLS: <input type="checkbox"/> POST HOLE DIGGER <input type="checkbox"/> HAND AUGER <input type="checkbox"/> SOUNDING ROD <input type="checkbox"/> VANE SHEAR TEST</p>										<p>FRIABLE RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.</p> <p>MODERATELY INDURATED GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.</p> <p>INDURATED GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.</p> <p>EXTREMELY INDURATED SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.</p>																																																																																																			
U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270																																																																																																																																																																	
	4.76	2.00	0.42	0.25	0.075	0.053																																																																																																																																																																	
BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)																																																																																																																																																																	
PLASTICITY										FRAC. SPACING										INDURATION										NOTES:																																																																																																																																									
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>NON PLASTIC</th> <th>SLIGHTLY PLASTIC</th> <th>MODERATELY PLASTIC</th> <th>HIGHLY PLASTIC</th> </tr> </thead> <tbody> <tr> <td>0-5</td> <td>6-15</td> <td>16-25</td> <td>26 OR MORE</td> </tr> </tbody> </table>										NON PLASTIC	SLIGHTLY PLASTIC	MODERATELY PLASTIC	HIGHLY PLASTIC	0-5	6-15	16-25	26 OR MORE	<p>FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.</p>										<p>BENCH MARK: I5987A-5=BY8; STA. 21+44.83 -L- 84.46' RIGHT N: 346,053; E: 2,000,619 ELEVATION: 146.05 FEET</p>										<p>NOTES:</p>																																																																																																																																	
NON PLASTIC	SLIGHTLY PLASTIC	MODERATELY PLASTIC	HIGHLY PLASTIC																																																																																																																																																																				
0-5	6-15	16-25	26 OR MORE																																																																																																																																																																				
COLOR										FRAC. SPACING										INDURATION										NOTES:																																																																																																																																									
<p>DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-GRAY). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.</p>										<p>FRAC. SPACING</p>										<p>INDURATION</p>										<p>NOTES:</p>																																																																																																																																									

KAREN PAUL OBERSHEA

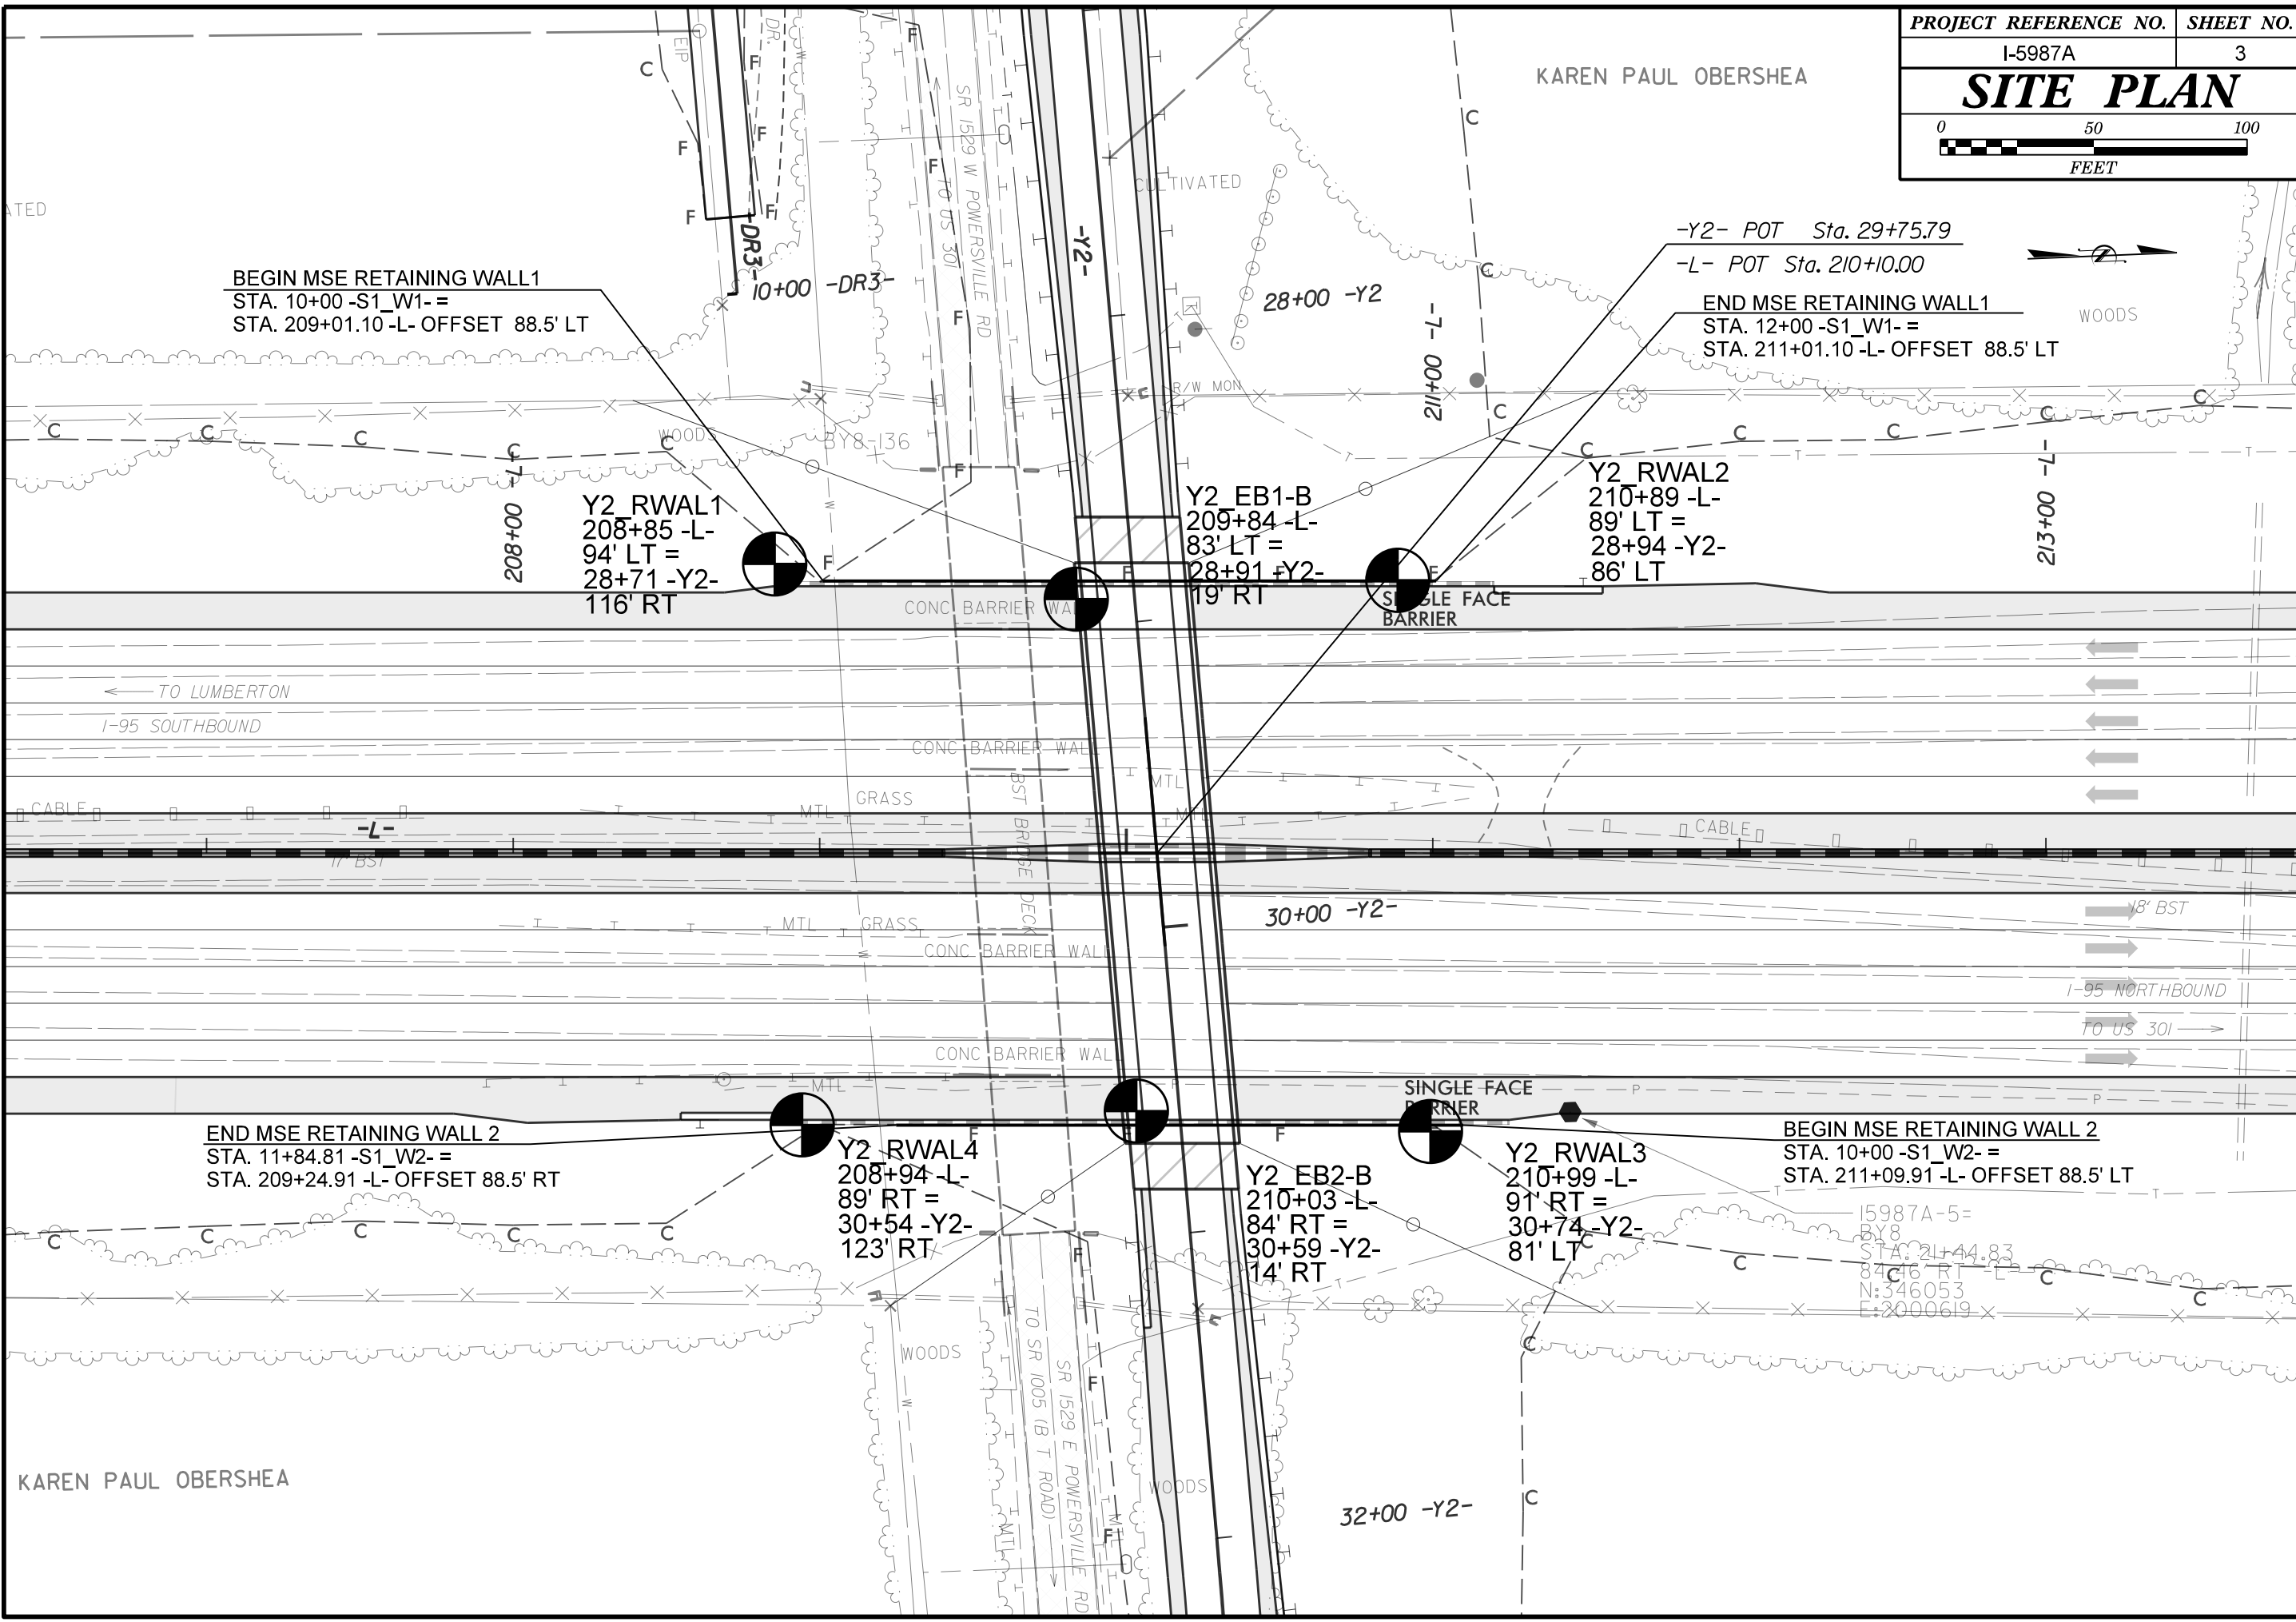

BEGIN MSE RETAINING WALL 1
 STA. 10+00 -S1_W1- =
 STA. 209+01.10 -L- OFFSET 88.5' LT

-Y2- POT Sta. 29+75.79
 -L- POT Sta. 210+10.00

END MSE RETAINING WALL 1
 STA. 12+00 -S1_W1- =
 STA. 211+01.10 -L- OFFSET 88.5' LT

Y2 RWAL1
 208+85 -L-
 94' LT =
 28+71 -Y2-
 116' RT

Y2 EB1-B
 209+84 -L-
 83' LT =
 28+91 +Y2-
 19' RT

Y2 RWAL2
 210+89 -L-
 89' LT =
 28+94 -Y2-
 86' LT

← TO LUMBERTON
 I-95 SOUTHBOUND

I-95 NORTHBOUND
 → TO US 301

END MSE RETAINING WALL 2
 STA. 11+84.81 -S1_W2- =
 STA. 209+24.91 -L- OFFSET 88.5' RT

BEGIN MSE RETAINING WALL 2
 STA. 10+00 -S1_W2- =
 STA. 211+09.91 -L- OFFSET 88.5' LT

Y2 RWAL4
 208+94 -L-
 89' RT =
 30+54 -Y2-
 123' RT

Y2 EB2-B
 210+03 -L-
 84' RT =
 30+59 -Y2-
 14' RT


Y2 RWAL3
 210+99 -L-
 91' RT =
 30+74 -Y2-
 81' LT

I5987A-5=
 BY8
 STA. 21+44.83
 84' RT
 N: 346053
 E: 2000619


KAREN PAUL OBERSHEA

32+00 -Y2-

NOTE: INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS WITH BOTH PROJECTED ON TO THE EXISTING GROUND PROFILE ALONG THE CENTERLINE OF -S1_W1- TAKEN FROM THE PROVIDED PROJECT TIN FILE: i5987_ls_tin1.tin

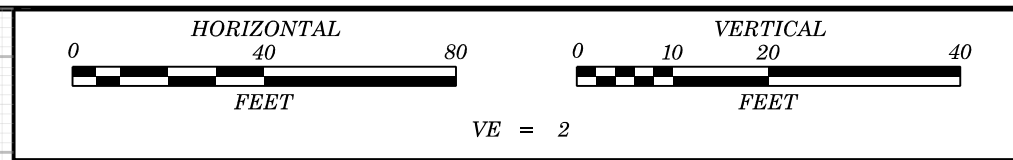


PROJECT REFERENCE NO.	SHEET NO.
I-5987A	4
PROFILE ALONG S1_EB1_WALL	

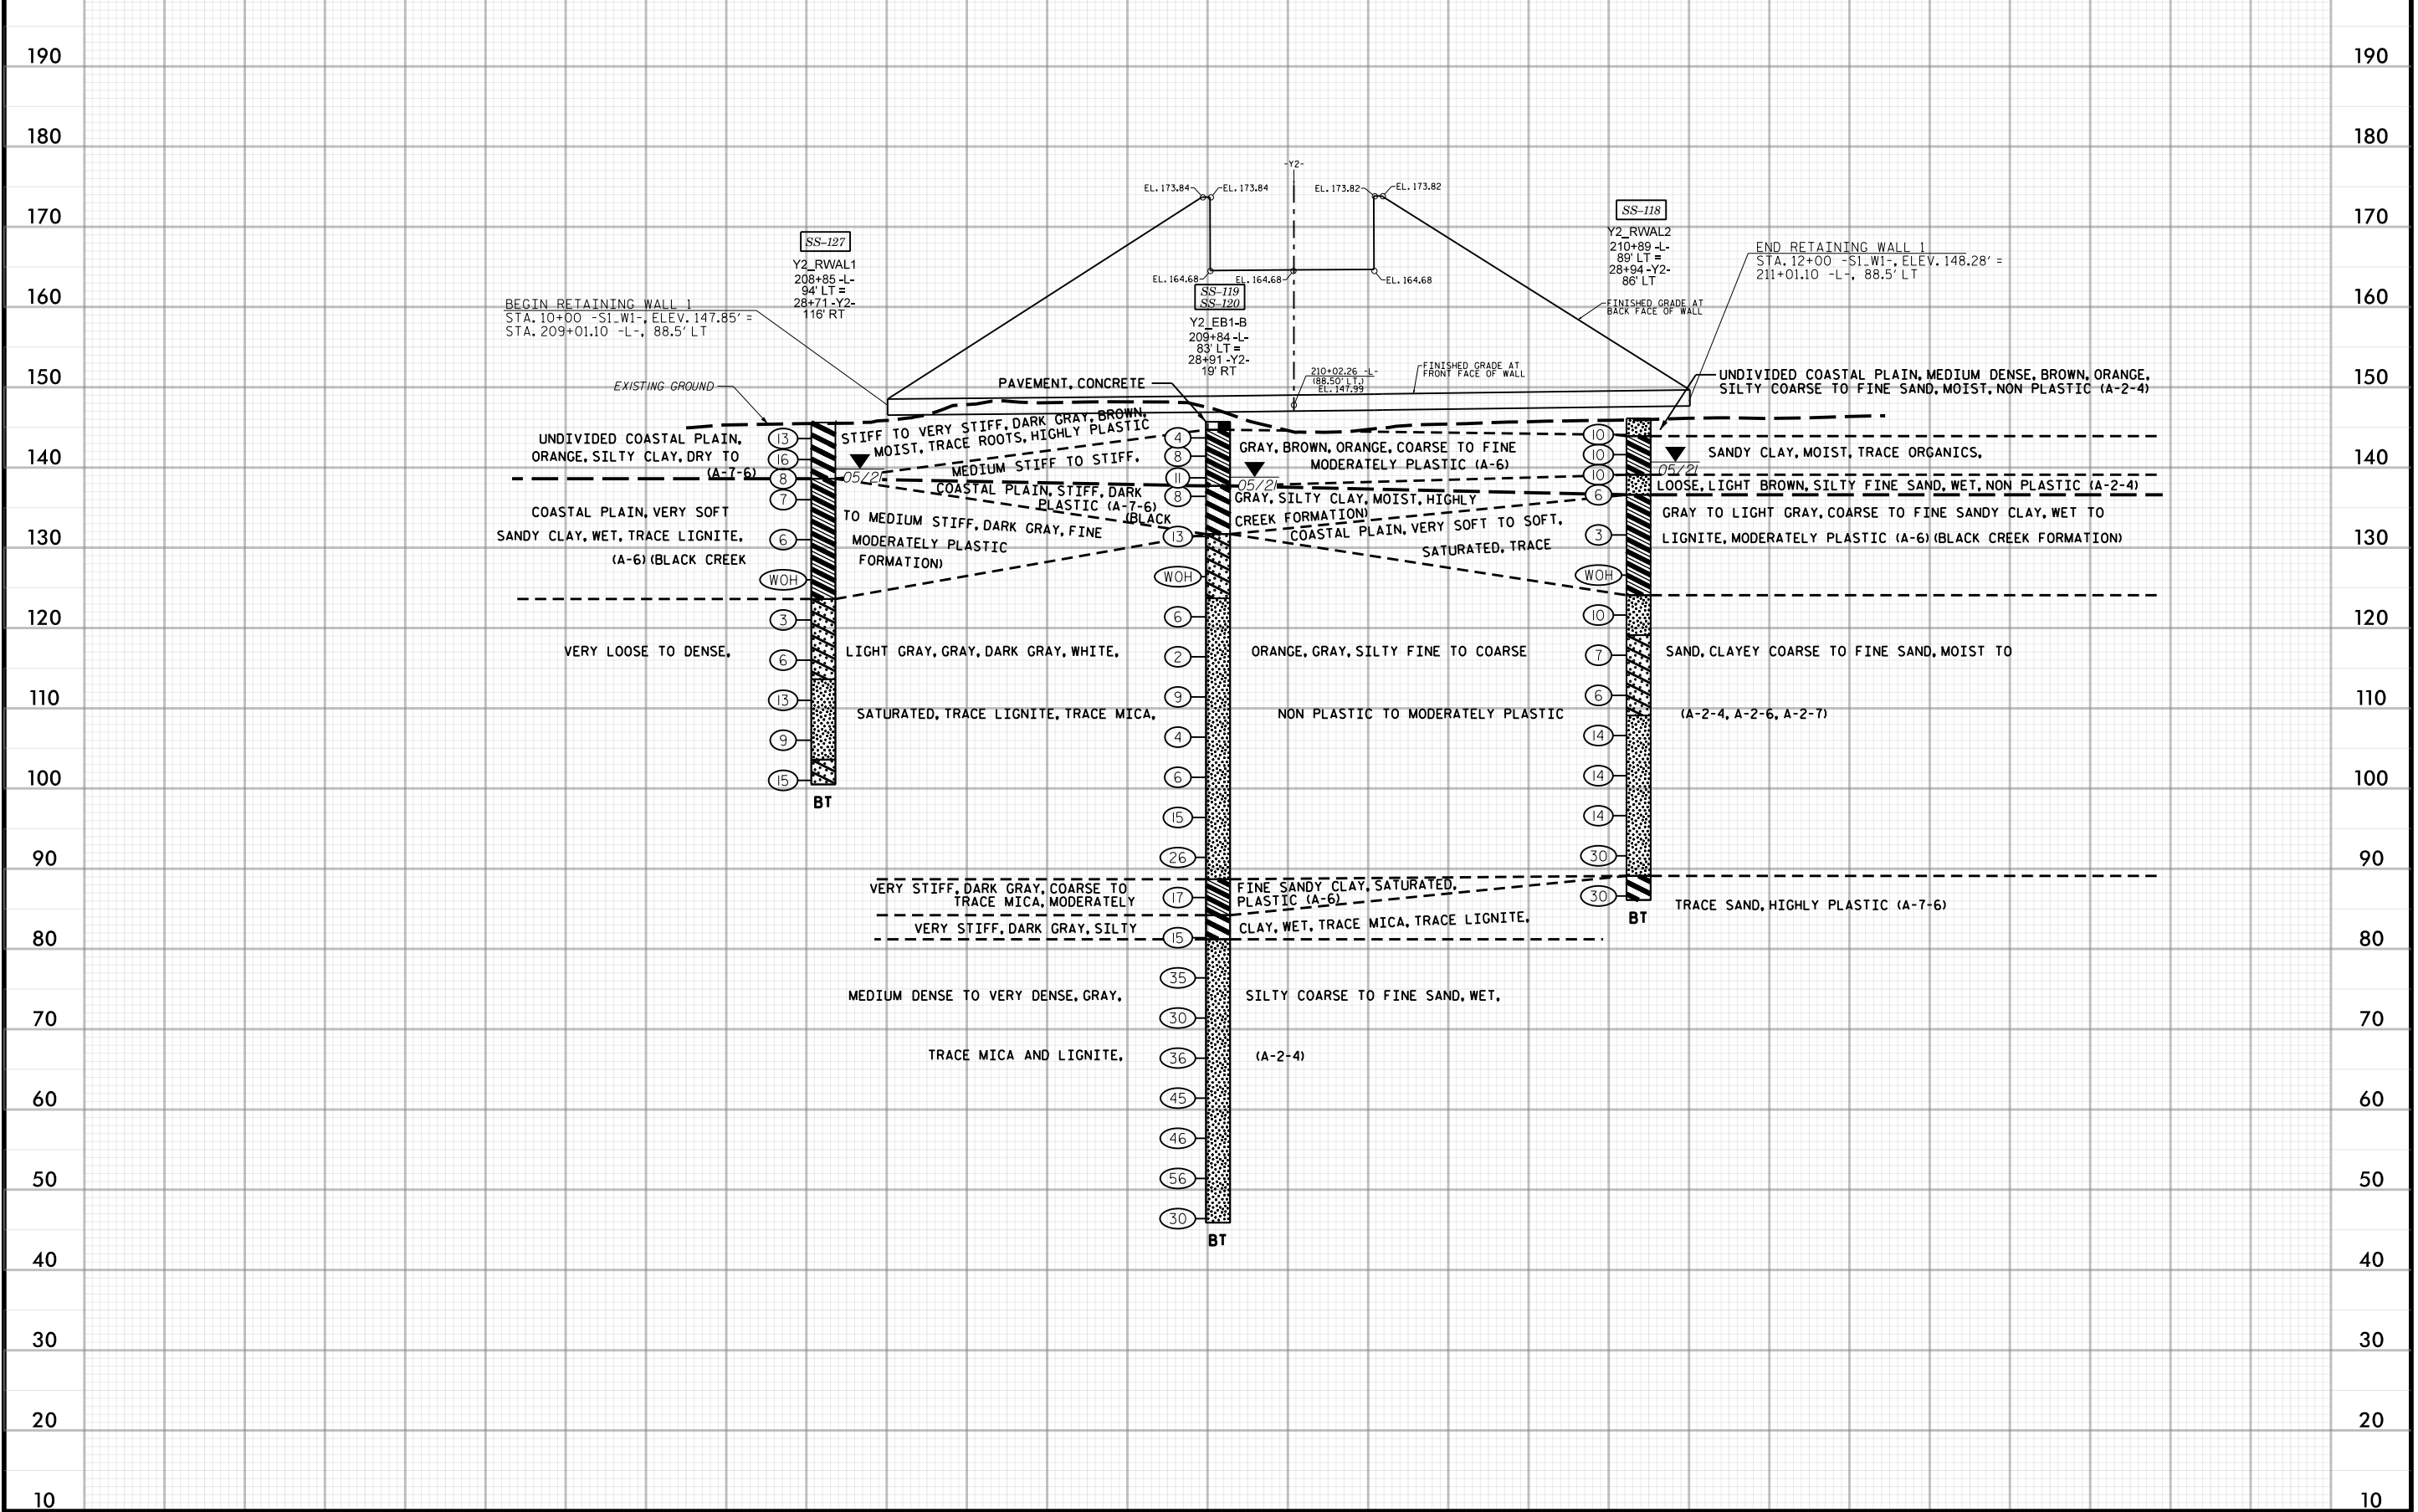


210
200
190
180
170
160
150
140
130
120
110
100
90
80
70
60
50
40
30
20
10

9+00 10+00 11+00 12+00 13+00 -S1_W1-

NOTE: INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS WITH BOTH PROJECTED ON TO THE EXISTING GROUND PROFILE ALONG THE CENTERLINE OF -S1_W2- TAKEN FROM THE PROVIDED PROJECT TIN FILE: i5987_ls_tin1.tin

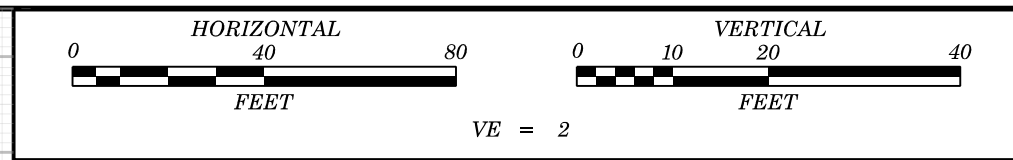

PROJECT REFERENCE NO. I-5987A SHEET NO. 5
 PROFILE ALONG S1_EB2_WALL

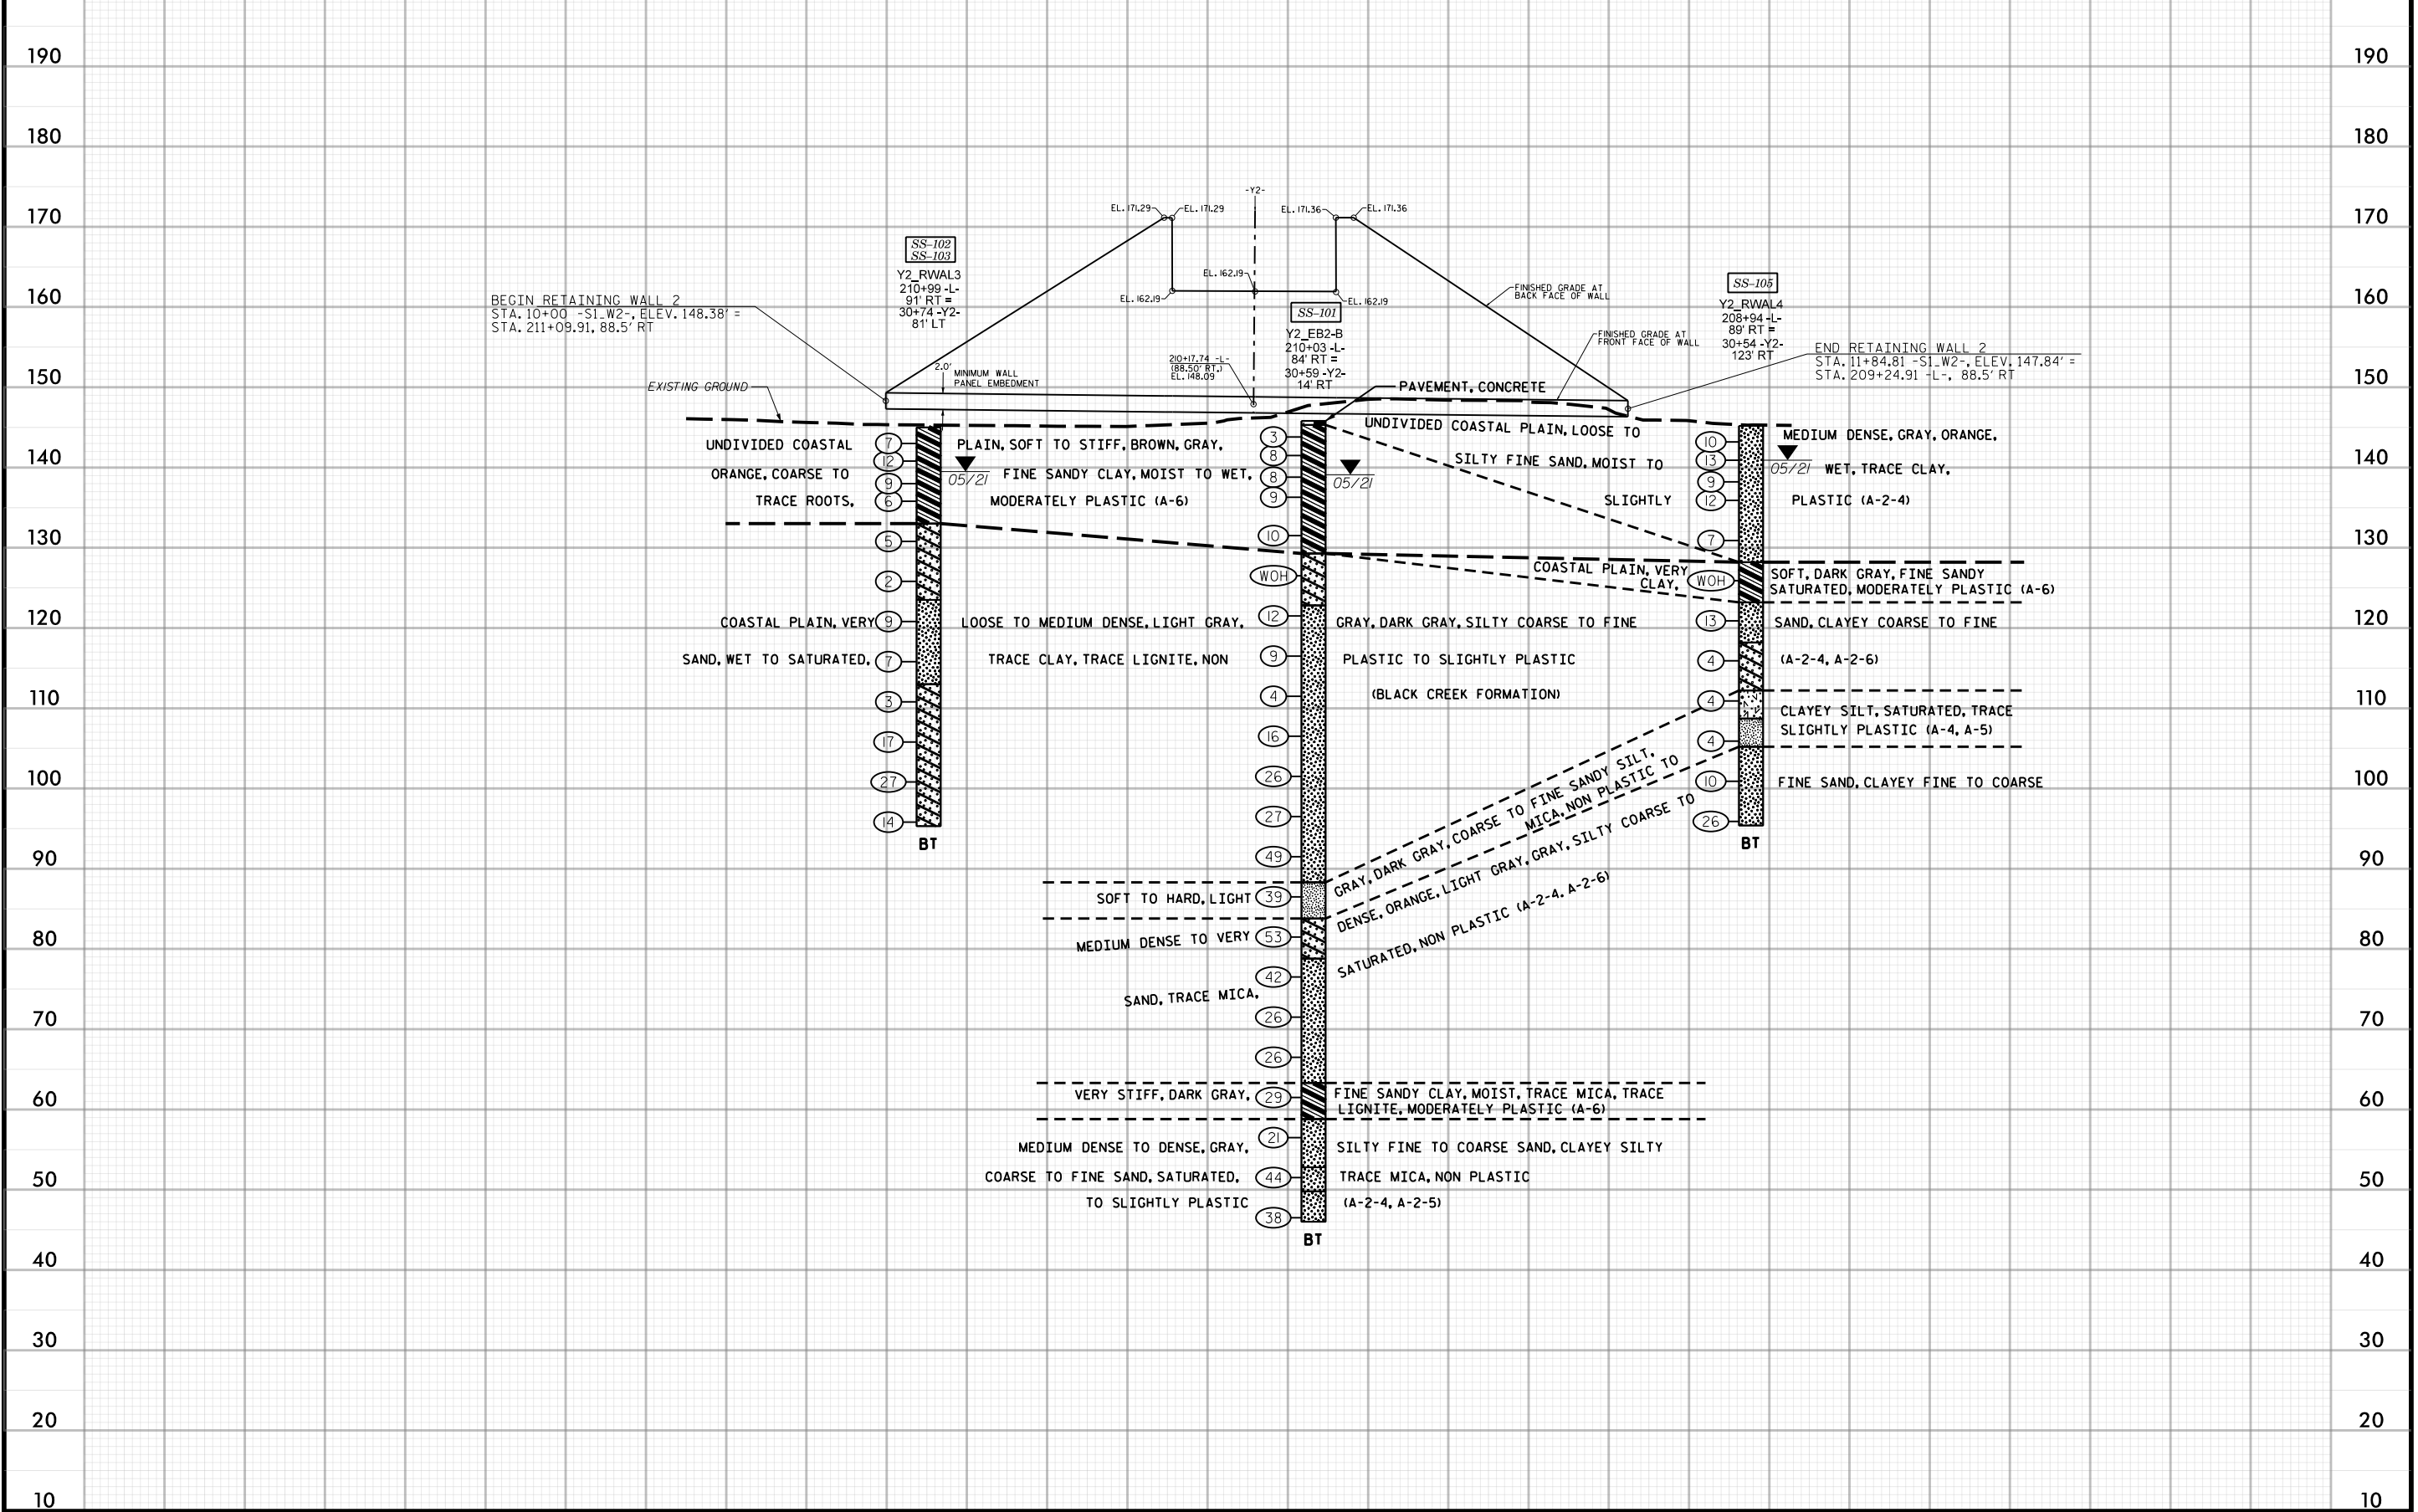

210 190 180 170 160 150 140 130 120 110 100 90 80 70 60 50 40 30 20 10

9+00 10+00 11+00 12+00 13+00 -S1_W2-

WBS 47533.1.2	TIP I-5987A	COUNTY ROBESON	GEOLOGIST DEGON, A. N.
SITE DESCRIPTION SITE 1 - ABUTMENT RET. WALLS AT EB1 AND EB2 OF BRIDGE ON -Y2- OVER -L- (I-95) AT -Y2- STA. 29+75.79			GROUND WTR (ft)
BORING NO. Y2_RWAL1	STATION 28+71	OFFSET 116 ft RT	ALIGNMENT -Y2-
COLLAR ELEV. 145.6 ft	TOTAL DEPTH 45.1 ft	NORTHING 345,801	EASTING 2,000,430
DRILL RIG/HAMMER EFF./DATE TER299 DIEDRICH D-50 79% 12/31/2020		DRILL METHOD Mud Rotary	HAMMER TYPE Automatic
DRILLER TURNAGE, J. R.	START DATE 05/18/21	COMP. DATE 05/18/21	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
150																
145	144.6	1.0	6	8	5										145.6	GROUND SURFACE
140	142.0	3.6	5	8	8											
135	139.6	6.0	3	4	4											
130	137.0	8.6	3	3	4											
125	132.0	13.6	3	3	3											
120	127.0	18.6	WOH	WOH	WOH											
115	122.0	23.6	1	1	2										123.6	VERY LOOSE TO LOOSE, DARK GRAY, CLAYEY COARSE TO FINE SAND, SATURATED, SLIGHTLY PLASTIC (A-2-7)
110	117.0	28.6	2	3	3											
105	112.0	33.6	5	6	7										113.6	LOOSE TO MEDIUM DENSE, GRAY, WHITE, SILTY COARSE TO FINE SAND, WET TO SATURATED (A-2-4)
	107.0	38.6	2	4	5											
	102.0	43.6	4	7	8										103.6	MEDIUM DENSE, GRAY, CLAYEY COARSE TO FINE SAND, WET, SLIGHTLY PLASTIC (A-2-7)
															100.5	Boring Terminated at Elevation 100.5 ft IN COASTAL PLAIN CLAYEY SAND (BLACK CREEK FORMATION) STA. 208+85 -L-; 94' LT



NCDOT BORE SINGLE I5987A_GEO_RWAL_SITE 1_Y2_BORELOGS.GPJ NC_DOT.GDT 1/26/22

GEOTECHNICAL BORING REPORT
BORE LOG

GEOTECHNICAL BORING REPORT
BORE LOG

WBS 47533.1.2	TIP I-5987A	COUNTY ROBESON	GEOLOGIST DEGON, A. N.
SITE DESCRIPTION SITE 1 - ABUTMENT RET. WALLS AT EB1 AND EB2 OF BRIDGE ON -Y2- OVER -L- (I-95) AT -Y2- STA. 29+75.79			GROUND WTR (ft)
BORING NO. Y2_EB1-B	STATION 28+91	OFFSET 19 ft RT	ALIGNMENT -Y2-
COLLAR ELEV. 145.7 ft	TOTAL DEPTH 99.8 ft	NORTHING 345,899	EASTING 2,000,446
DRILL RIG/HAMMER EFF./DATE TER299 DIEDRICH D-50 79% 12/31/2020		DRILL METHOD Mud Rotary	HAMMER TYPE Automatic
DRILLER TURNAGE, J. R.	START DATE 05/13/21	COMP. DATE 05/14/21	SURFACE WATER DEPTH N/A

WBS 47533.1.2	TIP I-5987A	COUNTY ROBESON	GEOLOGIST DEGON, A. N.
SITE DESCRIPTION SITE 1 - ABUTMENT RET. WALLS AT EB1 AND EB2 OF BRIDGE ON -Y2- OVER -L- (I-95) AT -Y2- STA. 29+75.79			GROUND WTR (ft)
BORING NO. Y2_EB1-B	STATION 28+91	OFFSET 19 ft RT	ALIGNMENT -Y2-
COLLAR ELEV. 145.7 ft	TOTAL DEPTH 99.8 ft	NORTHING 345,899	EASTING 2,000,446
DRILL RIG/HAMMER EFF./DATE TER299 DIEDRICH D-50 79% 12/31/2020		DRILL METHOD Mud Rotary	HAMMER TYPE Automatic
DRILLER TURNAGE, J. R.	START DATE 05/13/21	COMP. DATE 05/14/21	SURFACE WATER DEPTH N/A

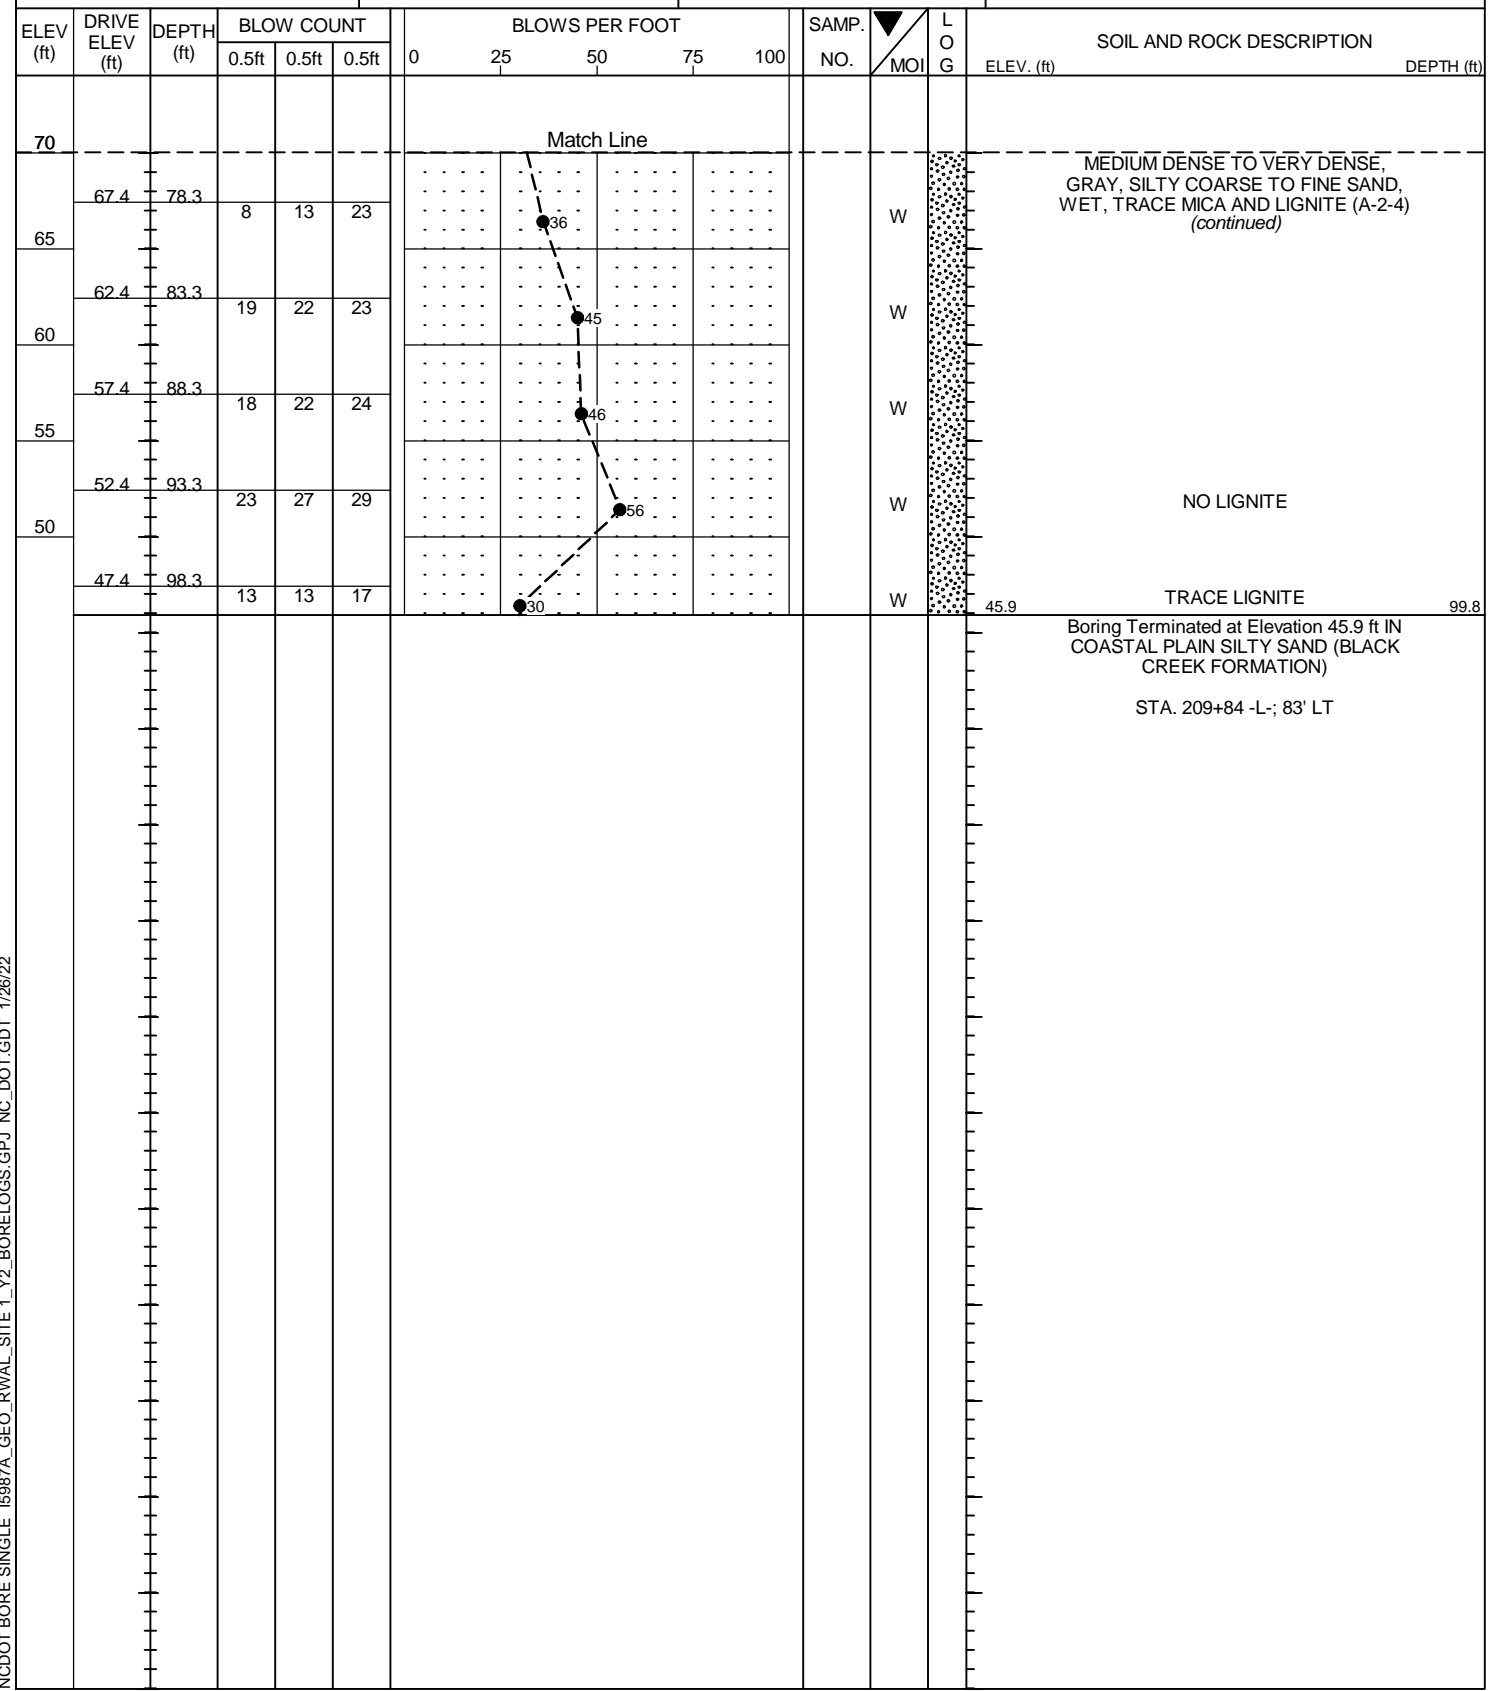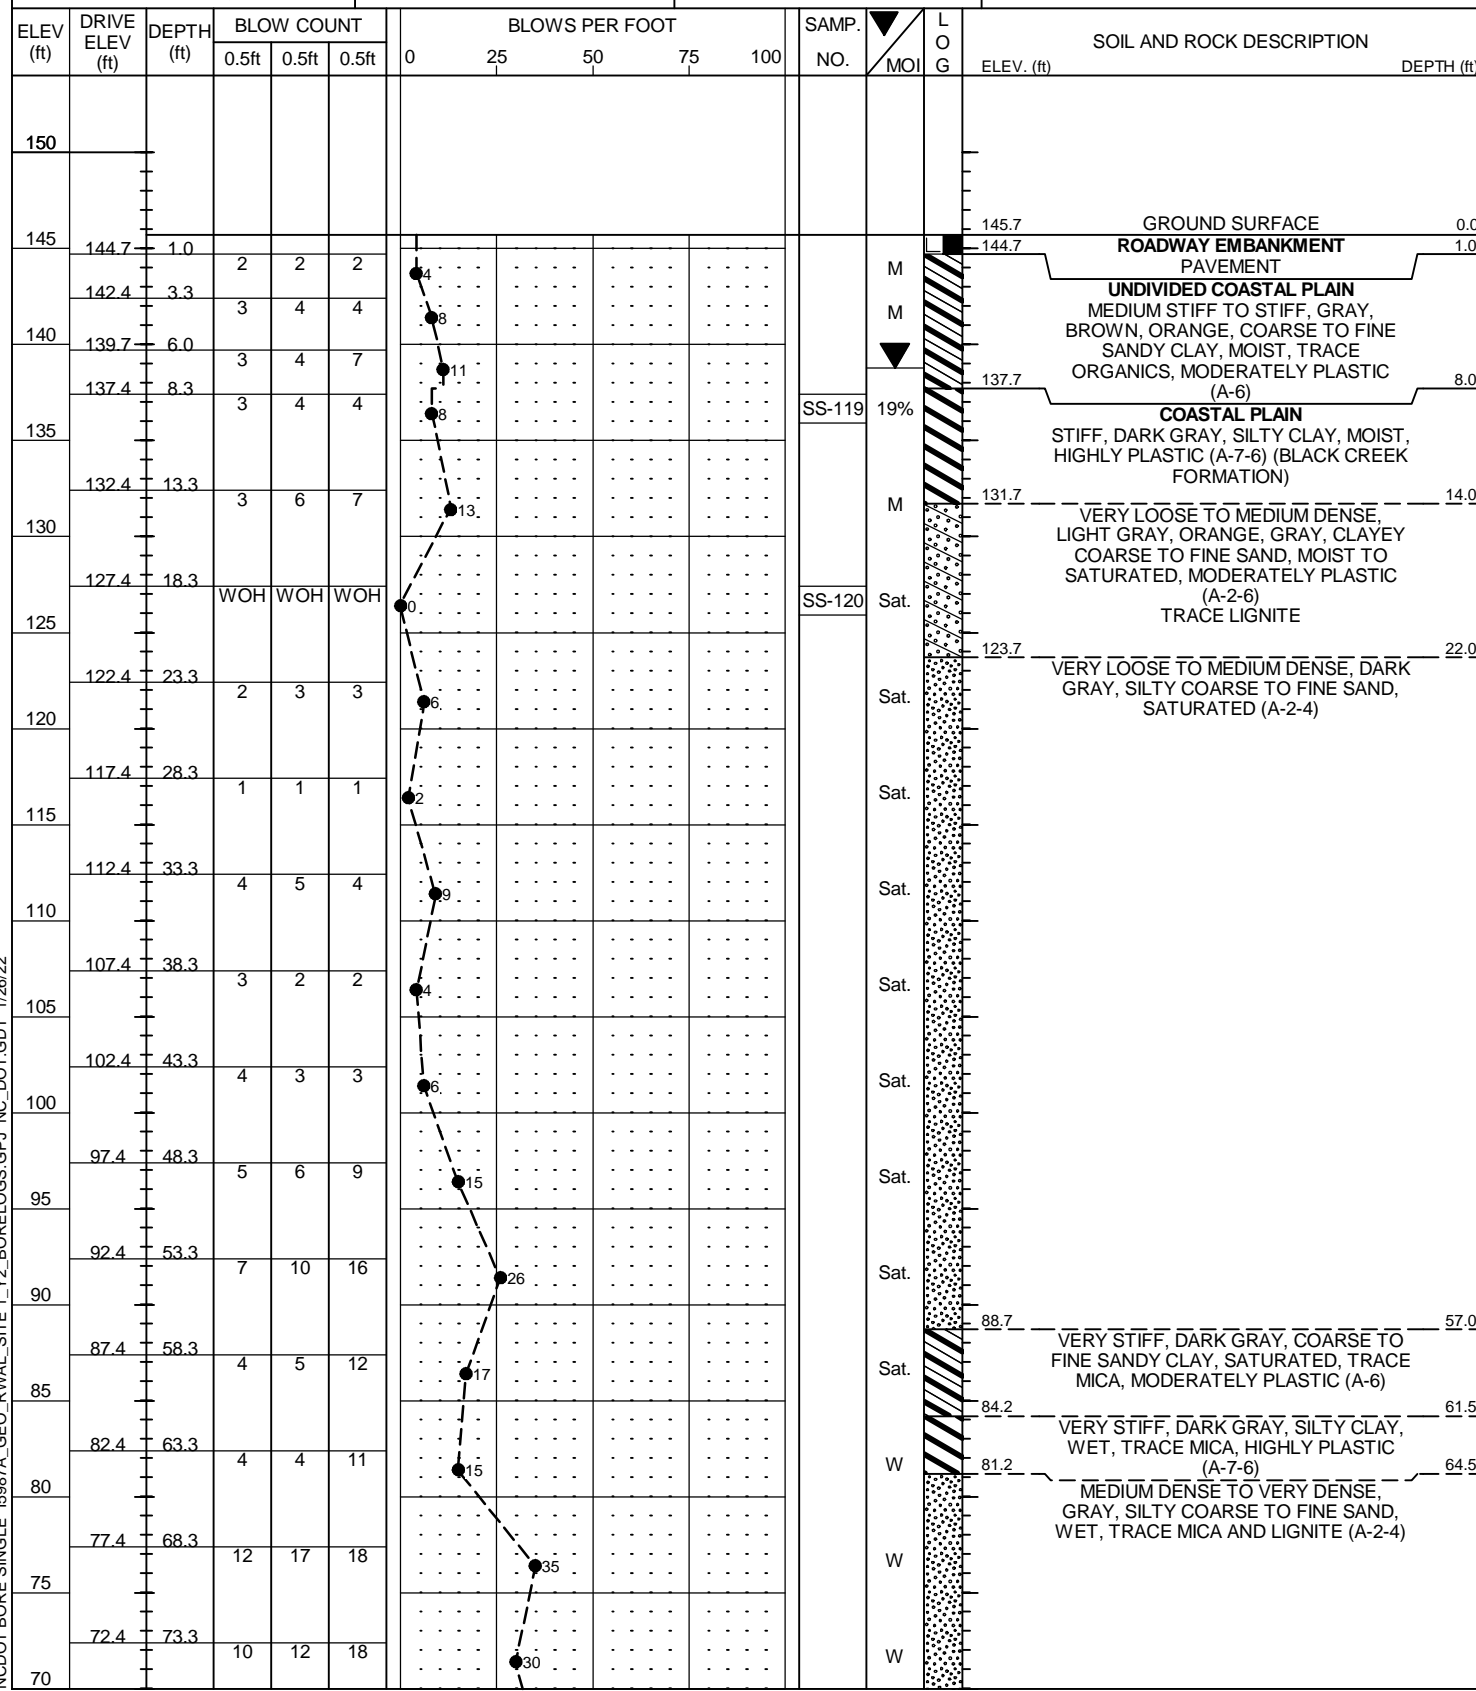

NCDOT BORE SINGLE I5987A_GEO_RWAL_SITE 1_Y2_BORELOGS.GPJ NC_DOT.GDT 1/26/22

NCDOT BORE SINGLE I5987A_GEO_RWAL_SITE 1_Y2_BORELOGS.GPJ NC_DOT.GDT 1/26/22

GEOTECHNICAL BORING REPORT
BORE LOG

GEOTECHNICAL BORING REPORT
BORE LOG

WBS 47533.1.2		TIP I-5987A		COUNTY ROBESON		GEOLOGIST DEGON, A. N.									
SITE DESCRIPTION SITE 1 - ABUTMENT RET. WALLS AT EB1 AND EB2 OF BRIDGE ON -Y2- OVER -L- (I-95) AT -Y2- STA. 29+75.79							GROUND WTR (ft)								
BORING NO. Y2_RWAL2		STATION 28+94		OFFSET 86 ft LT		ALIGNMENT -Y2-									
COLLAR ELEV. 146.1 ft		TOTAL DEPTH 60.0 ft		NORTHING 346,019		EASTING 2,000,634									
DRILL RIG/HAMMER EFF./DATE TER299 DIEDRICH D-50 79% 12/31/2020		DRILL METHOD Mud Rotary		HAMMER TYPE Automatic											
DRILLER TURNAGE, J. R.		START DATE 05/13/21		COMP. DATE 05/13/21		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
150															
145	145.1	1.0	6	5	5								M	146.1	0.0
	142.6	3.5	5	5	5								SS-118	143.9	2.2
140	140.1	6.0	2	4	6								W	139.1	7.0
	137.6	8.5	5	5	1								W	136.6	9.5
135													W		
	132.6	13.5	WOH	WOH	3								W		
130													Sat.		
	127.6	18.5	WOH	WOH	WOH								Sat.		
125													Sat.		
	122.6	23.5	4	5	5								Sat.	124.1	22.0
120													Sat.	119.1	27.0
	117.6	28.5	2	2	5								Sat.	109.1	37.0
115													Sat.		
	112.6	33.5	6	3	3								Sat.	109.1	37.0
110													Sat.		
	107.6	38.5	4	6	8								Sat.	109.1	37.0
105													Sat.		
	102.6	43.5	5	7	7								Sat.		
100													Sat.		
	97.6	48.5	6	6	8								Sat.		
95													Sat.		
	92.6	53.5	7	12	18								Sat.		
90													Sat.		
	87.6	58.5	6	9	21								W	89.1	57.0
													W	86.1	60.0
Boring Terminated at Elevation 86.1 ft IN COASTAL PLAIN SILTY CLAY (BLACK CREEK FORMATION)															
STA. 210+89 -L-; 89' LT															


WBS 47533.1.2		TIP I-5987A		COUNTY ROBESON		GEOLOGIST DEGON, A. N.									
SITE DESCRIPTION SITE 1 - ABUTMENT RET. WALLS AT EB1 AND EB2 OF BRIDGE ON -Y2- OVER -L- (I-95) AT -Y2- STA. 29+75.79							GROUND WTR (ft)								
BORING NO. Y2_RWAL3		STATION 30+74		OFFSET 81 ft LT		ALIGNMENT -Y2-									
COLLAR ELEV. 145.0 ft		TOTAL DEPTH 49.7 ft		NORTHING 346,007		EASTING 2,000,624									
DRILL RIG/HAMMER EFF./DATE TER299 DIEDRICH D-50 79% 12/31/2020		DRILL METHOD Mud Rotary		HAMMER TYPE Automatic											
DRILLER TURNAGE, J. R.		START DATE 05/05/21		COMP. DATE 05/05/21		SURFACE WATER DEPTH N/A									
ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100					
145															
	144.0	1.0	3	4	3								M	145.0	0.0
	141.8	3.2	5	6	6								SS-102		
140													M		
	139.0	6.0	4	5	4								W		
	136.8	8.2	3	3	3								W		
135													W		
	131.8	13.2	1	2	3								Sat.	133.0	12.0
130													Sat.		
	126.8	18.2	1	1	1								SS-103		
125													Sat.		
	121.8	23.2	3	4	5								Sat.	123.5	21.5
120													Sat.		
	116.8	28.2	2	3	4								Sat.		
115													Sat.		
	111.8	33.2	1	1	2								Sat.	113.0	32.0
110													Sat.		
	106.8	38.2	6	5	12								Sat.		
105													Sat.		
	101.8	43.2	8	11	16								Sat.		
100													Sat.		
	96.8	48.2	5	8	6								Sat.		
													Sat.	95.3	49.7
Boring Terminated at Elevation 95.3 ft IN COASTAL PLAIN CLAYEY SAND (BLACK CREEK FORMATION)															
STA. 210+99 -L-; 91' RT															

NCDOT BORE SINGLE I5987A_GEO_RWAL_SITE 1_Y2_BORELOGS.GPJ NC_DOT.GDT 1/26/22

NCDOT BORE SINGLE I5987A_GEO_RWAL_SITE 1_Y2_BORELOGS.GPJ NC_DOT.GDT 1/26/22

GEOTECHNICAL BORING REPORT
BORE LOG


WBS 47533.1.2	TIP I-5987A	COUNTY ROBESON	GEOLOGIST DEGON, A. N.
SITE DESCRIPTION SITE 1 - ABUTMENT RET. WALLS AT EB1 AND EB2 OF BRIDGE ON -Y2- OVER -L- (I-95) AT -Y2- STA. 29+75.79			GROUND WTR (ft)
BORING NO. Y2_EB2-B	STATION 30+59	OFFSET 14 ft RT	ALIGNMENT -Y2-
COLLAR ELEV. 145.8 ft	TOTAL DEPTH 99.8 ft	NORTHING 345,912	EASTING 2,000,613
DRILL RIG/HAMMER EFF./DATE TER299 DIEDRICH D-50 79% 12/31/2020		DRILL METHOD Mud Rotary	HAMMER TYPE Automatic
DRILLER TURNAGE, J. R.	START DATE 05/04/21	COMP. DATE 05/04/21	SURFACE WATER DEPTH N/A

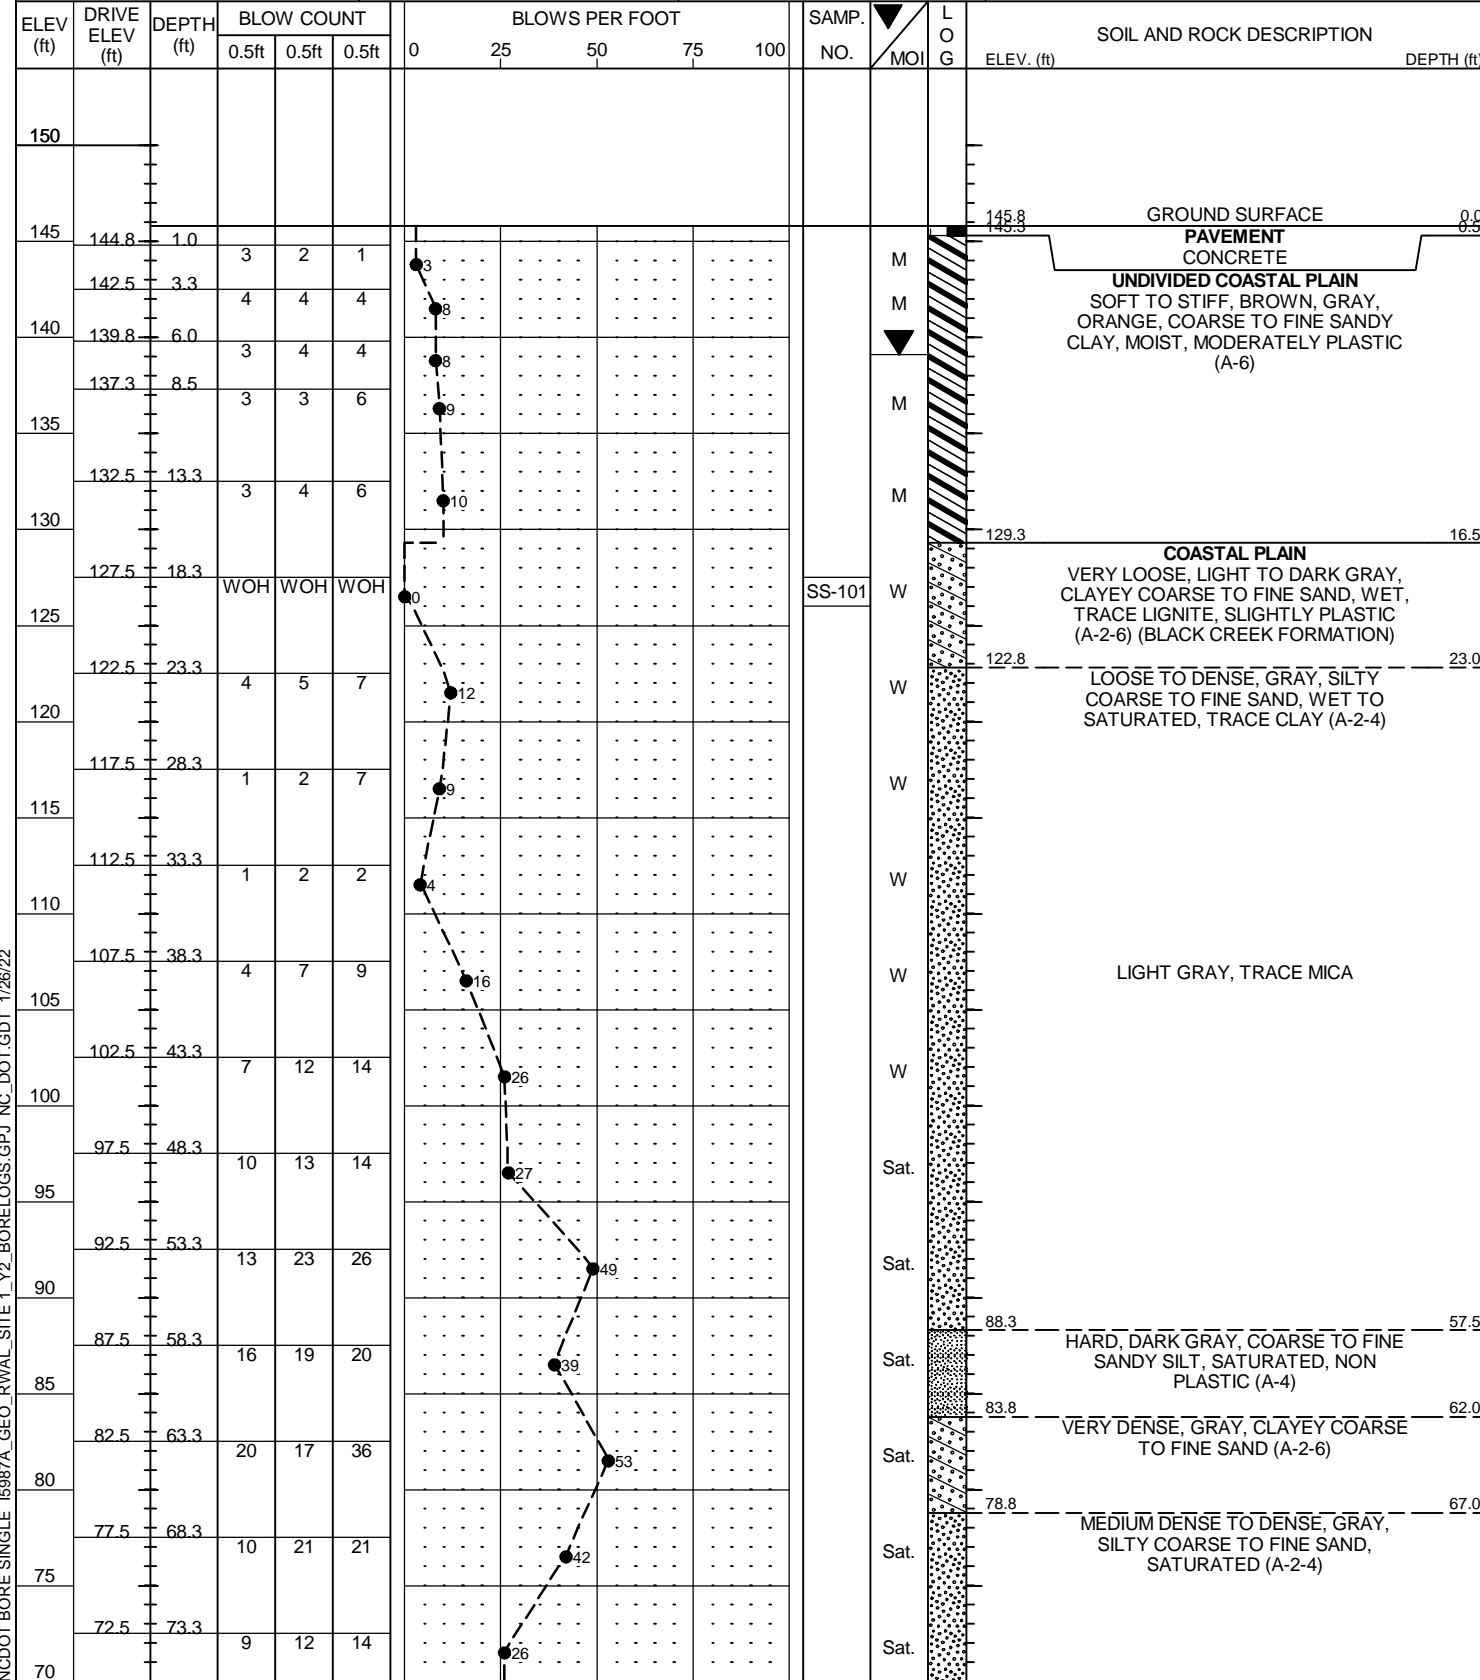

NCDOT BORE SINGLE I5987A_GEO_RWAL_SITE 1_Y2_BORELOGS.GPJ NC_DOT.GDT 1/26/22

GEOTECHNICAL BORING REPORT
BORE LOG

WBS 47533.1.2	TIP I-5987A	COUNTY ROBESON	GEOLOGIST DEGON, A. N.
SITE DESCRIPTION SITE 1 - ABUTMENT RET. WALLS AT EB1 AND EB2 OF BRIDGE ON -Y2- OVER -L- (I-95) AT -Y2- STA. 29+75.79			GROUND WTR (ft)
BORING NO. Y2_EB2-B	STATION 30+59	OFFSET 14 ft RT	ALIGNMENT -Y2-
COLLAR ELEV. 145.8 ft	TOTAL DEPTH 99.8 ft	NORTHING 345,912	EASTING 2,000,613
DRILL RIG/HAMMER EFF./DATE TER299 DIEDRICH D-50 79% 12/31/2020		DRILL METHOD Mud Rotary	HAMMER TYPE Automatic
DRILLER TURNAGE, J. R.	START DATE 05/04/21	COMP. DATE 05/04/21	SURFACE WATER DEPTH N/A

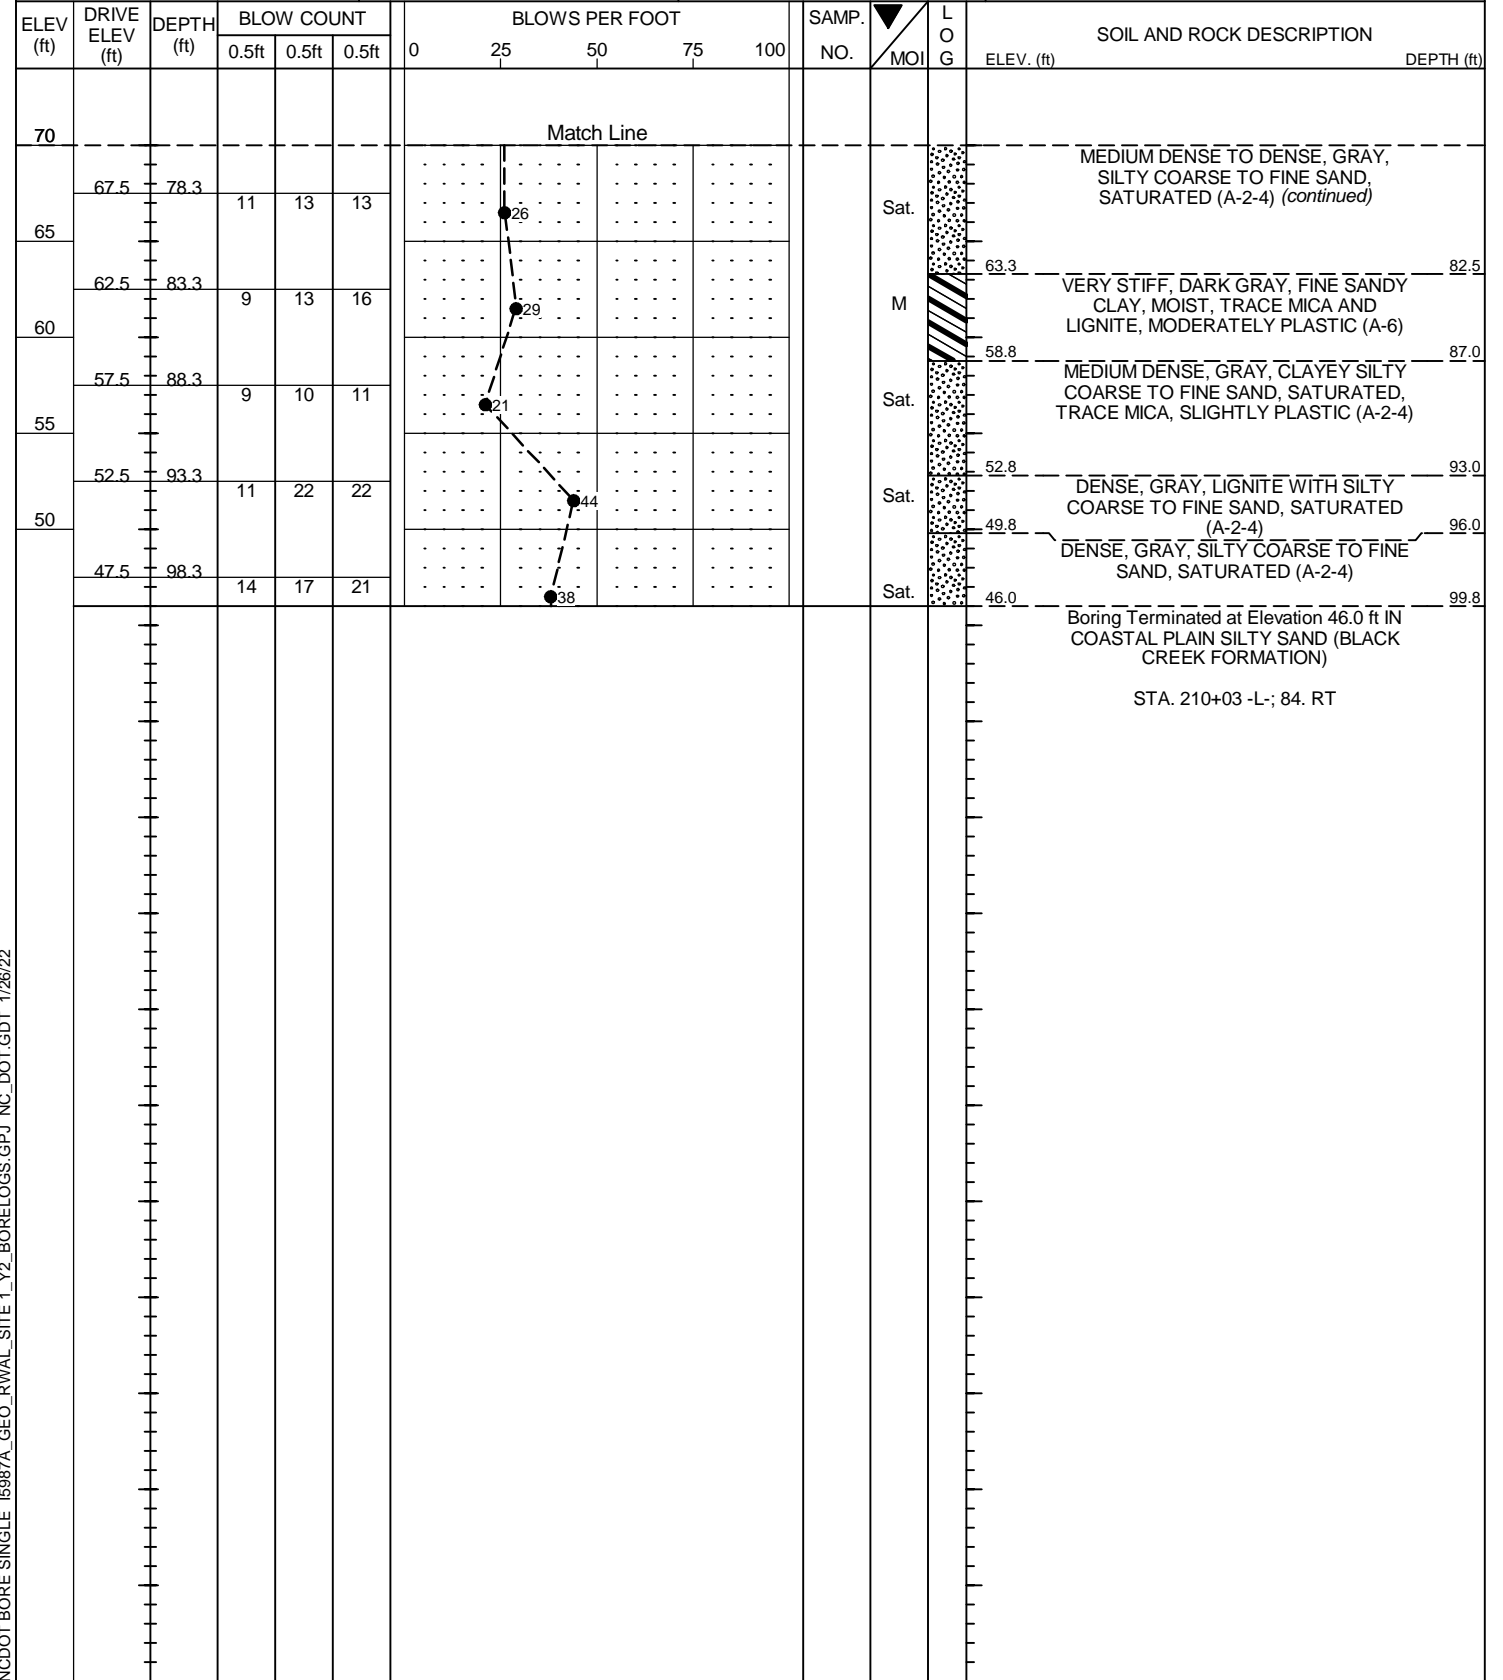

NCDOT BORE SINGLE I5987A_GEO_RWAL_SITE 1_Y2_BORELOGS.GPJ NC_DOT.GDT 1/26/22

WBS 47533.1.2	TIP I-5987A	COUNTY ROBESON	GEOLOGIST DEGON, A. N.
SITE DESCRIPTION SITE 1 - ABUTMENT RET. WALLS AT EB1 AND EB2 OF BRIDGE ON -Y2- OVER -L- (I-95) AT -Y2- STA. 29+75.79			GROUND WTR (ft)
BORING NO. Y2_RWAL4	STATION 30+54	OFFSET 123 ft RT	ALIGNMENT -Y2-
COLLAR ELEV. 145.2 ft	TOTAL DEPTH 49.8 ft	NORTHING 345,803	EASTING 2,000,613
DRILL RIG/HAMMER EFF./DATE TER299 DIEDRICH D-50 79% 12/31/2020		DRILL METHOD Mud Rotary	HAMMER TYPE Automatic
DRILLER TURNAGE, J. R.	START DATE 05/05/21	COMP. DATE 05/05/21	SURFACE WATER DEPTH N/A

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. NO.	MOI	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)		
			0.5ft	0.5ft	0.5ft	0	25	50	75	100							
150																	
145															145.2	GROUND SURFACE	
	144.2	1.0															
	141.9	3.3	6	5	5	10								M		UNDIVIDED COASTAL PLAIN LOOSE TO MEDIUM DENSE, GRAY, ORANGE, SILTY FINE SAND, MOIST TO WET, TRACE ORGANICS (A-2-4)	
	139.2	6.0	5	7	6	13											
	136.9	8.3	3	4	5	9								M			
	131.9	13.3	10	7	5	12								W			
	126.9	18.3	4	4	3	7								W			
	121.9	23.3	WOH	WOH	WOH	10								Sat.		COASTAL PLAIN VERY SOFT, DARK GRAY, FINE SANDY CLAY, SATURATED, MODERATELY PLASTIC (A-6)	
	116.9	28.3	4	5	8	13								Sat.		MEDIUM DENSE, GRAY, SILTY COARSE TO FINE SAND, SATURATED, NON PLASTIC (A-2-4)	
	111.9	33.3	1	2	2	4								Sat.		LOOSE, DARK GRAY, CLAYEY COARSE TO FINE SAND, SATURATED, SLIGHTLY PLASTIC (A-2-6)	
	106.9	38.3	3	2	2	4								Sat.		MEDIUM STIFF, LIGHT GRAY, CLAYEY SILT, SLIGHTLY PLASTIC (A-5)	
	101.9	43.3	2	2	2	4								Sat.		SOFT, LIGHT GRAY, FINE SANDY SILT, SATURATED, TRACE MICA (A-4)	
	96.9	48.3	3	4	6	10								Sat.		MEDIUM DENSE, LIGHT GRAY, ORANGE, SILTY COARSE TO FINE SAND, SATURATED, TRACE MICA, NON PLASTIC (A-2-4)	
			6	11	15	26								Sat.		Boring Terminated at Elevation 95.4 ft IN UNDIVIDED COASTAL PLAIN SILTY SAND STA. 208+94 -L-; 89' RT	

NCDOT BORE SINGLE I5987A_GEO_RWAL_SITE 1_Y2_BORELOGS.GPJ NC_DOT.GDT 1/26/22

LABORATORY TESTING SUMMARY

PROJECT NUMBER: 47533.1.2

TIP: I-5987A

COUNTY: ROBESON

DESCRIPTION: SITE 1 - ABUTMENT RETAINING WALLS AT END BENT 1 AND END BENT 2 OF BRIDGE ON -Y2- (SR 1529 POWERSVILLE ROAD) OVER -L- (I-95) AT -Y2- STA. 29+75.79

Sample No.	Station	Alignment	Offset (feet)	Depth Interval (feet)	AASHTO Class.	L.L.	P.I.	% by Weight				% Retained #4 Sieve	% Passing (sieves)			% Moisture	% Organic
								Coarse Sand	Fine Sand	Silt	Clay		#10	#40	#200		
SS-101	30+59	-Y2-	14 RT	18.3 - 19.8	A-2-6 (0)	31	11	10.2	64.9	6.1	18.8	0	100	95	27	--	--
SS-102	30+74	-Y2-	81 LT	3.2 - 4.7	A-6 (6)	40	24	30.0	29.2	7.5	33.3	0	100	85	43	19.5	--
SS-103	30+74	-Y2-	81 LT	18.2 - 19.7	A-2-6 (0)	32	14	7.2	66.4	10.3	16.1	0	100	97	29	--	--
SS-105	30+54	-Y2-	123 RT	8.3 - 9.8	A-2-4 (0)	26	10	28.4	49.0	5.2	17.4	0	100	91	25	--	--
SS-118	28+94	-Y2-	86 LT	3.5 - 5.0	A-6 (4)	31	18	24.6	35.9	13.1	26.4	0	100	88	43	12.8	--
SS-119	28+91	-Y2-	19 RT	8.3 - 9.8	A-7-6 (13)	45	32	11.9	36.5	15.8	35.8	0	100	97	55	19.2	--
SS-120	28+91	-Y2-	19 RT	18.3 - 19.8	A-2-6 (0)	32	16	8.4	64.5	6.0	21.1	0	100	98	29	--	--
SS-127	28+71	-Y2-	116 RT	3.6 - 5.1	A-7-6 (13)	45	29	21.6	23.7	16.7	38.0	0	100	88	58	19.0	--

Stephanie H. Huffman
 Certified Lab Technician Signature

114-01-1203
 Certification Number