


PAVEMENT SCHEDULE

WAKE COUNTY RESURFACING

PROJECT REFERENCE NO. 2023CPT 05.03.2022L ETC	SHEET NO. 16
Prepared in the Office of: 	

* VARIABLE OUTSIDE SHOULDER – PARTIAL C&G, PARTIAL EARTH SHOULDER

C1	PROP. APPROX. 1" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.	U	EXISTING PAVEMENT
C2	PROP. APPROX. 1¼" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 137.5 LBS. PER SQ. YD.	V1	MILL ASPHALT PAVEMENT, 1½" DEPTH
C3	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.	V2	MILL ASPHALT PAVEMENT, 2½" DEPTH
D1	PROP. APPROX. 2½" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD.	V3	MILL ASPHALT PAVEMENT, 0'-1" DEPTH
R	EXISTING CURB AND GUTTER	V4	MILL ASPHALT PAVEMENT, 0'-1¼" DEPTH
S	SHOULDER GRADING, ASB REQUIRED	V5	MILL ASPHALT PAVEMENT, 0'-1½" DEPTH

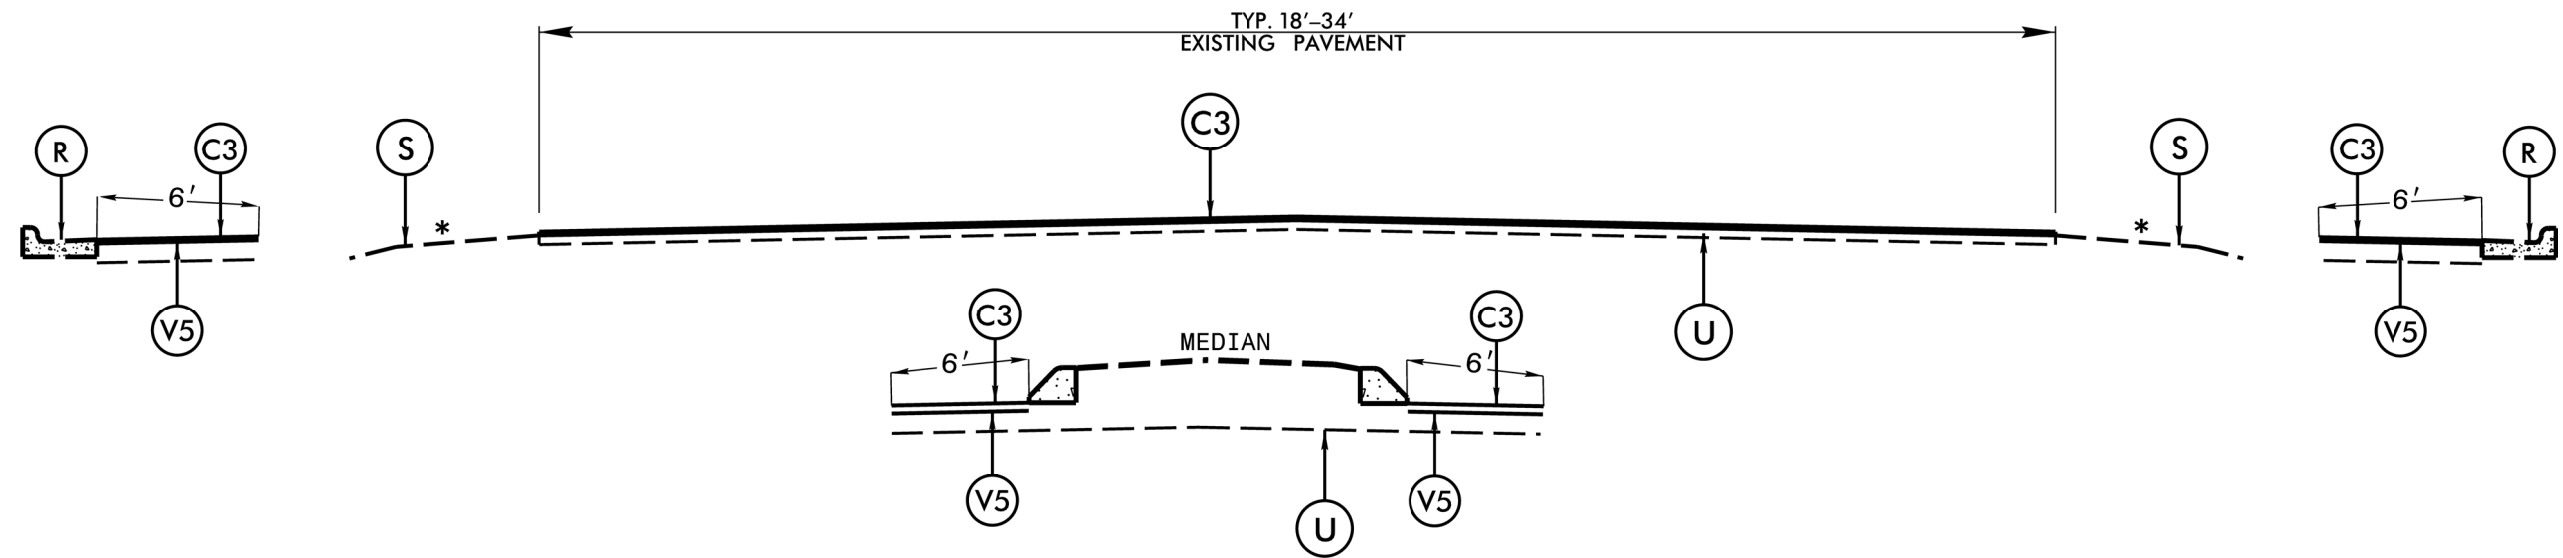

TYPICAL SECTION NO. 1

FULL DEPTH PATCHING AND RESURFACE S9.5B
 MAP NOS. 1, 3-4, 8-11, 16, 23-24, 28, 30-31, 41-47, 50-55

**** SHOULDER GRADING ON MAPS 1-3, 8, 10, 54-55 ONLY ****

MAP 8 SR 1191 (TECHNOLOGY DR.)
 0-1½" MILLING AT CONCRETE ISLAND IN MEDIAN
 AT APPROXIMATELY STA 0+00 TO STA 0+81.

MAP 30 SR 3743 (MARY MARVIN TRL.)
 0-1½" MILLING AT CONCRETE ISLAND IN MEDIAN
 AT APPROXIMATELY STA 0+11 TO STA 0+70.

0-1½" MILLING AT CURB & GUTTER
 AT APPROXIMATELY STA 0+11 TO STA 0+70.

MAP 41 SR 3810 (S. DOWNS DR.)
 0-1½" MILLING AT CONCRETE ISLAND IN MEDIAN
 AT APPROXIMATELY STA 0+25 TO STA 1+17.

0-1½" MILLING AT CURB & GUTTER
 AT APPROXIMATELY STA 0+00 TO STA 1+17.

MAP 1 SR 1101 (PINEY GROVE WILBON RD.)
 0-1½" MILLING AT CURB & GUTTER
 AT APPROXIMATELY STA 4+25 TO STA 12+75.

MAP 3 SR 1398 (DICKENS RD.)
 0-1½" MILLING AT CURB & GUTTER
 AT APPROXIMATELY STA 37+90 TO STA 38+82.

MAP 9 SR 1202 (THIRD ST.)
 0-1½" MILLING AT CURB & GUTTER
 AT APPROXIMATELY STA 3+69 TO STA 6+12 LT
 AND STA 6+12 TO STA 7+54 RT.

C:\Users\jgibson\OneDrive\Documents\2023\2023CPT 05.03.2022L ETC\16.dwg