



8/17/99

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
V1	MILLING OF EXISTING ASPHALT PAVEMENT AT DEPTH OF 1½"
T	SHOULDER GRADING
U	EXISTING PAVEMENT

PROJECT REFERENCE NO.	SHEET NO.
2023CPT.05.04.10921J, etc.	16

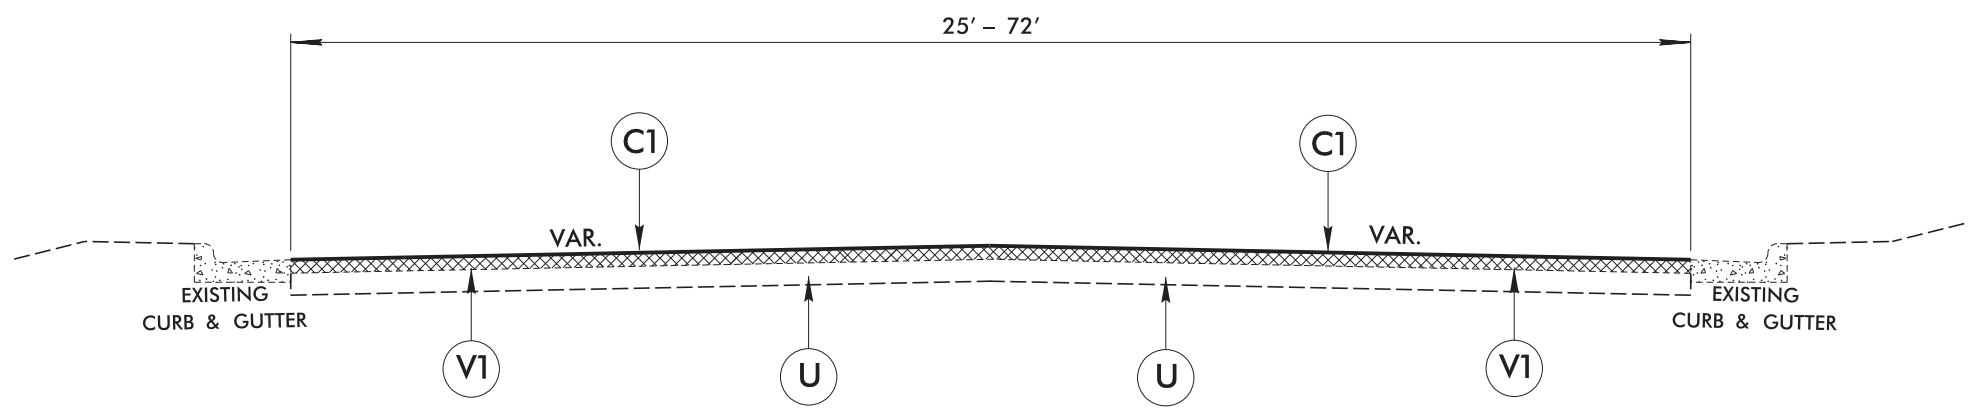


**TYPICAL SECTION NO. 1**

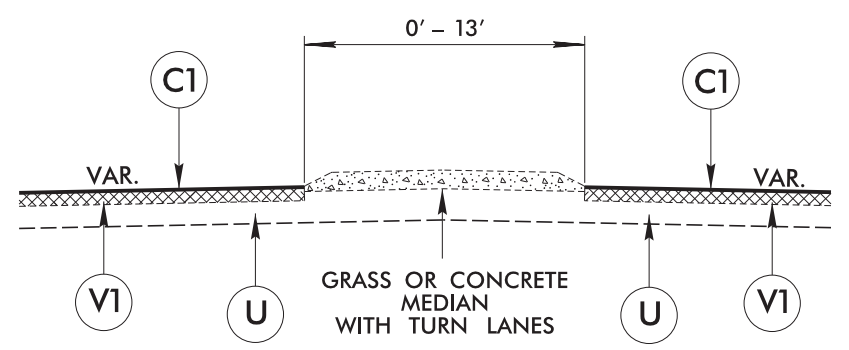

USE IN CONJUNCTION WITH TYPICAL SECTION NO. 1


MAP 7 LAURA DUNCAN RD.  
MEDIAN SECTION - 260' +/-

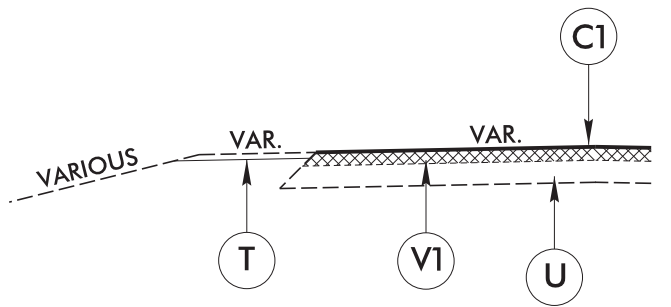

USE IN CONJUNCTION WITH TYPICAL SECTION NO. 1

MAP 7 LAURA DUNCAN RD.  
SHOULDER SECTION LT. - 1050' +/-

MAP 8 OLIVE CHAPEL RD.  
SHOULDER SECTION LT. - 5339' +/-

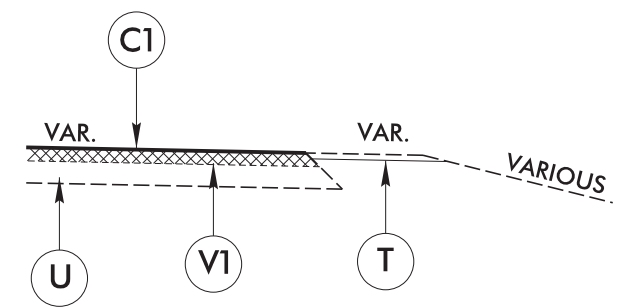

USE IN CONJUNCTION WITH TYPICAL SECTION NO. 1

MAP 7 LAURA DUNCAN RD.  
SHOULDER SECTION RT. - 1250' +/-

MAP 8 OLIVE CHAPEL RD.  
SHOULDER SECTION RT. - 995' +/-

**NOTE:**  
AGGREGATE SHOULDER BORROW IS TO BE CONSIDERED A CONTINGENCY ITEM.  
EXACT QUANTITIES ARE NOT DETERMINED.  
USE AS NEEDED FOR SHOULDER TREATMENT.