



8/17/99

PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. APPROX. 2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 224 LBS. PER SQ. YD.
V1	MILLING OF EXISTING ASPHALT PAVEMENT AT DEPTH OF 1½"
V2	MILLING OF EXISTING ASPHALT PAVEMENT AT DEPTH OF 2" (TO BE PAID FOR AS INCIDENTAL MILLING)
T	SHOULDER GRADING
U	EXISTING PAVEMENT

PROJECT REFERENCE NO.	SHEET NO.
2023CPT.05.04.10921J, etc.	18

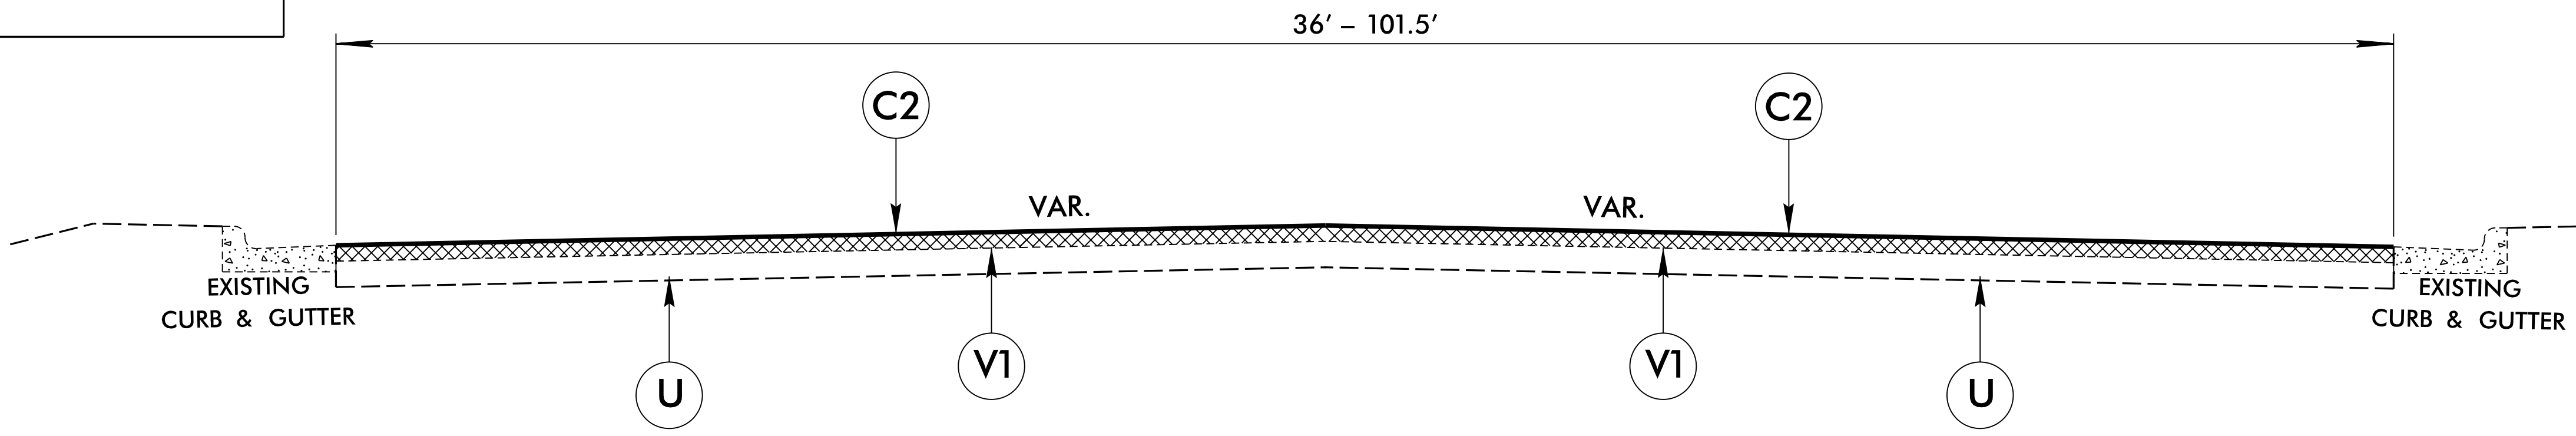


**TYPICAL SECTION NO. 4**

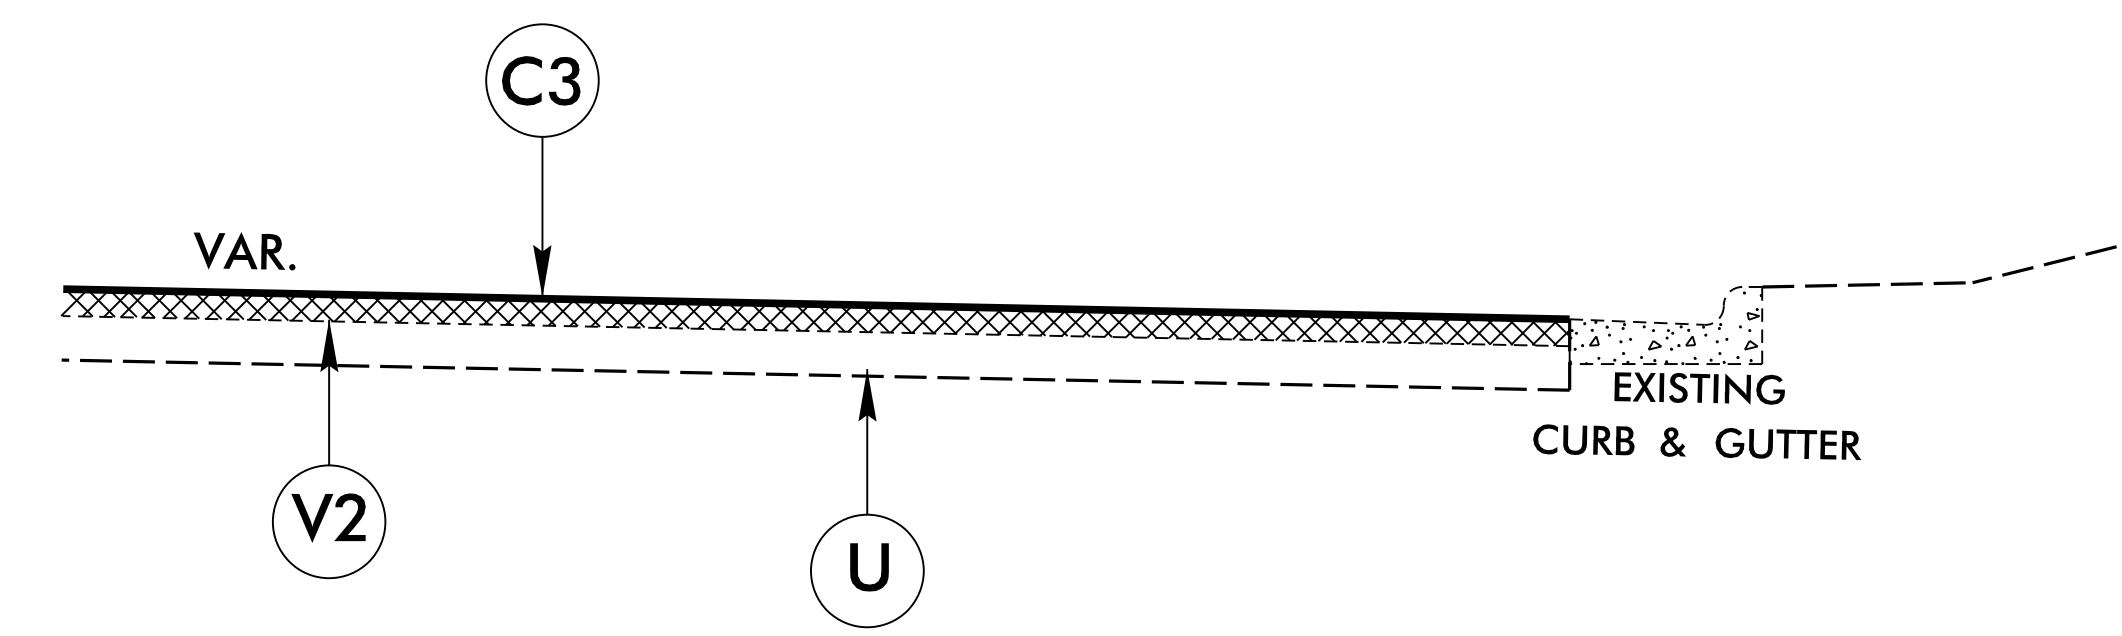


USE IN CONJUNCTION WITH TYPICAL SECTION NO. 4

MAP 2 US 70 WB  
INTERSECTION OF MCDOWELL ST. AND CABARRUS ST. - 88' +/-  
SEE INTERSECTION DETAIL ON SHEET 20

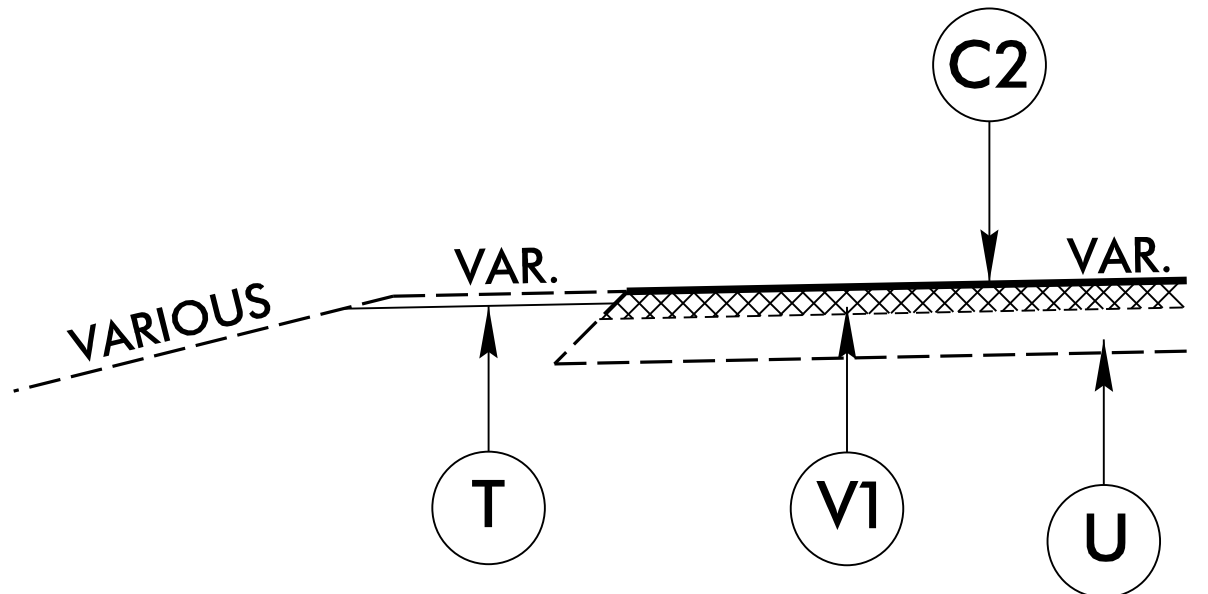

USE IN CONJUNCTION WITH TYPICAL SECTION NO. 4

MAP 3 US 70 EB  
SHOULDER SECTION LT. - 1145' +/-

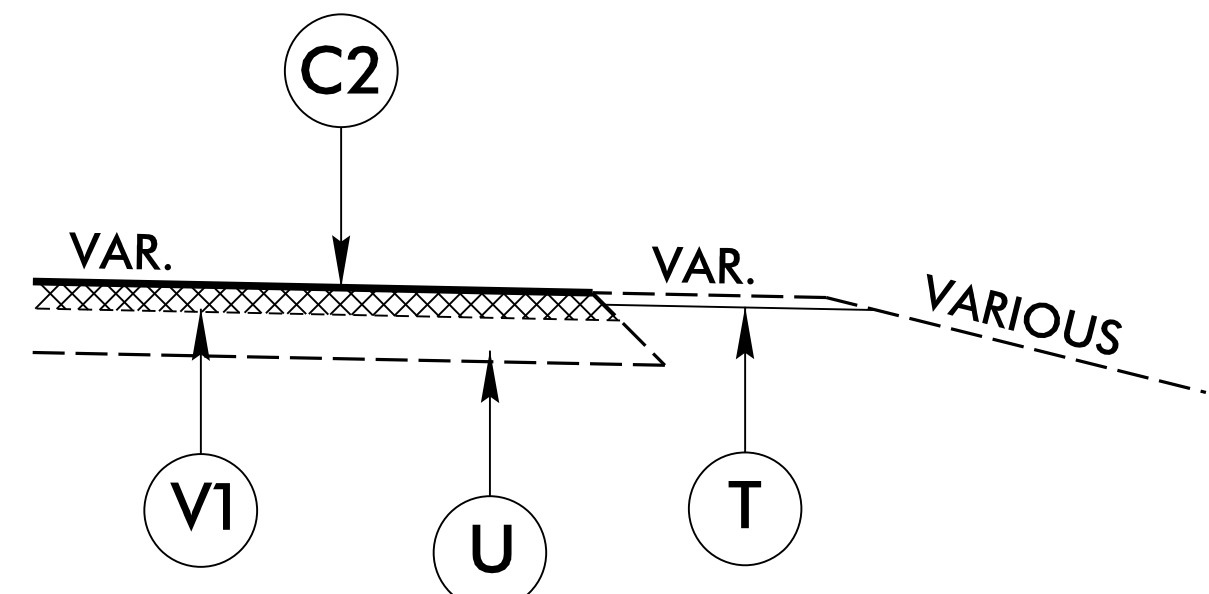

USE IN CONJUNCTION WITH TYPICAL SECTION NO. 4

MAP 2 US 70 WB  
SHOULDER SECTION RT. - 1135' +/-

**NOTE:**  
AGGREGATE SHOULDER BORROW IS TO BE CONSIDERED A CONTINGENCY ITEM.  
EXACT QUANTITIES ARE NOT DETERMINED. USE AS NEEDED FOR SHOULDER TREATMENT.