PROJECT REFERENCE NO.	SHEET NO.
HI-0007	2A-2

PAVEMENT SCHEDULE	
C2	2" S9.5C
M2	MILL 2"
U	EX. PAVEMENT

NOTE:
FOR MILLING EXISTING PAVEMENT,
WHEN OPEN-GRADED FRICTION COURSE IS PRESENT, USE 2.75" AND
WHEN OPEN-GRADED FRICTION COURSE IS NOT PRESENT, USE 2".

US-264 RAMP

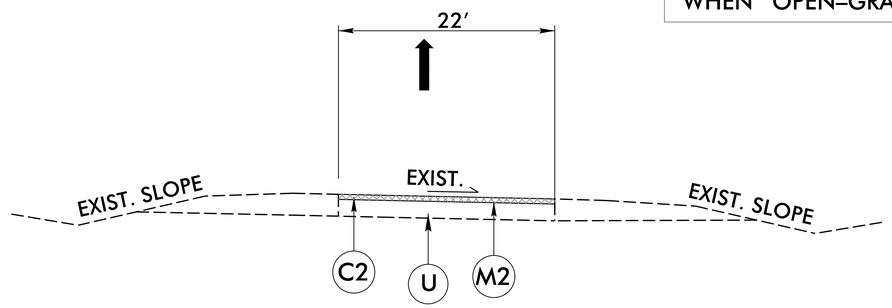

TYPICAL SECTION NO. 2

USE TYPICAL SECTION NO. 2

MAPS 2, 3, 4, 5, 6, 7, 8, 9

NOTES TO CONTRACTOR

Perform the work in accordance with Section 607 of the January 2018 North Carolina Department of Transportation Standard Specifications for Roads and Structures. Resurfacing will be accomplished at the same time as the milling operation.

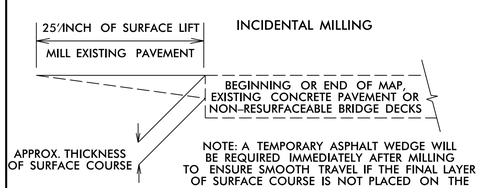

NOTE: A TEMPORARY ASPHALT WEDGE WILL BE REQUIRED IMMEDIATELY AFTER MILLING TO ENSURE SMOOTH TRAVEL IF THE FINAL LAYER OF SURFACE COURSE IS NOT PLACED ON THE SAME DAY AS MILLING.

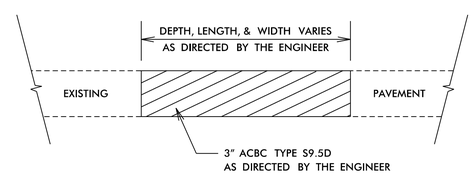

PATCHING EXISTING PAVEMENT
US-264 TRAVEL LANES
MILLING TO BE PERFORMED PRIOR TO PATCHING

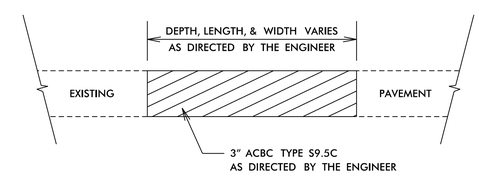

PATCHING EXISTING PAVEMENT
US-264 RAMPS
MILLING TO BE PERFORMED PRIOR TO PATCHING

REVISIONS

8/17/99

5/19/2022
HI-0007_Rdy.psh02A-2_Typ.dgn
USER:Rskennedy