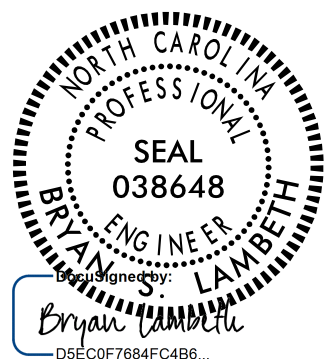
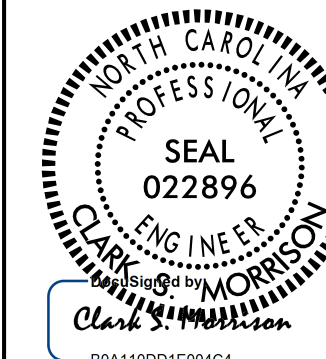



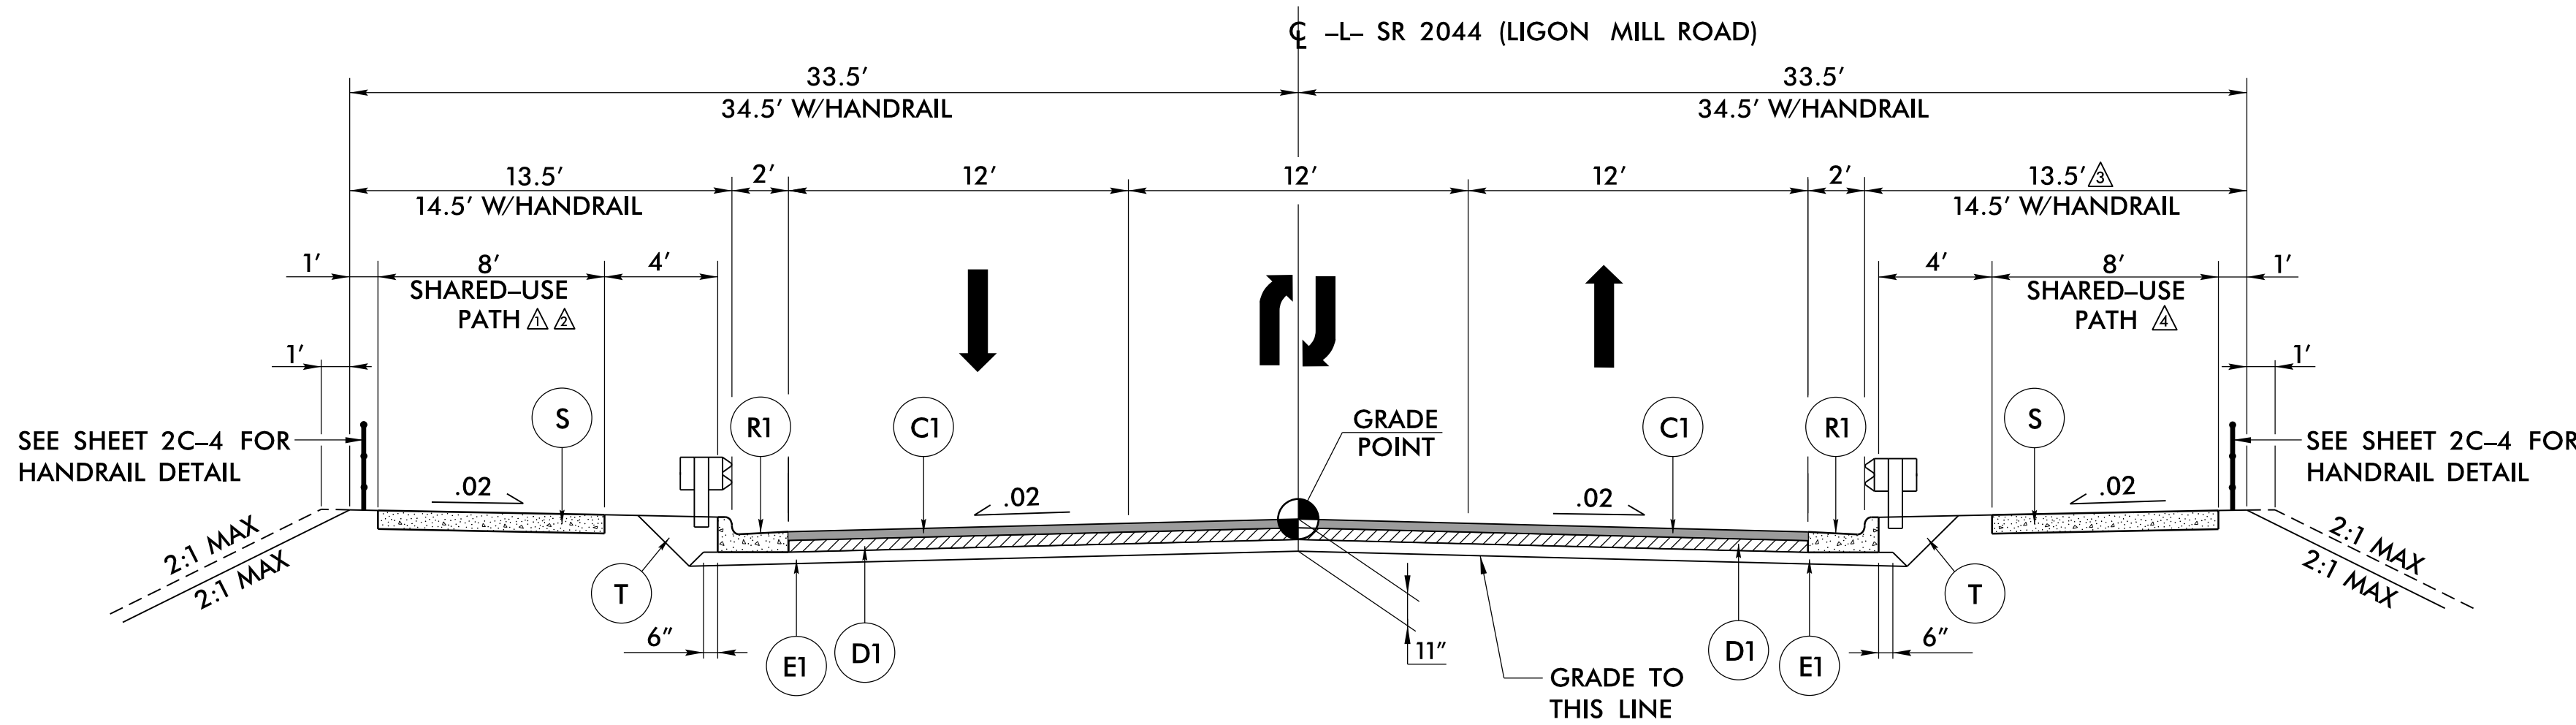
6/2/99

FINAL PAVEMENT SCHEDULE

PROJECT REFERENCE NO. B-5318	SHEET NO. 2A-1
ROADWAY DESIGN ENGINEER 	PAVEMENT DESIGN ENGINEER 
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	
 Dewberry	
NC DEPARTMENT OF TRANSPORTATION PAVEMENT MANAGEMENT UNIT 1593 MAIL SERVICE CENTER RALEIGH, NC 27699-1593	

ITEM	DESCRIPTION	ITEM	DESCRIPTION	ITEM	DESCRIPTION
(A1)	4" JOINTED CONCRETE WITH WIRE MESH	(D2)	PROP. VAR. DEPTH ASPHALT CONC. INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YARD PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 2.5" OR GREATER THAN 4" IN DEPTH.	(S)	4" CONCRETE SIDEWALK
(A2)	6" JOINTED CONCRETE WITH WIRE MESH	(E1)	PROP. APPROX. 4.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YARD.	(T)	EARTH MATERIAL
(C1)	PROP. APPROX. 3" ASPHALT CONC. SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YARD IN EACH OF TWO LAYERS.	(E2)	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YARD PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3" OR GREATER THAN 5.5" IN DEPTH.	(U)	EXISTING PAVEMENT
(C2)	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS PER SQ. YARD PER 1" DEPTH TO BE PLACED IN LAYERS NOT TO EXCEED 1.5" IN DEPTH.	(J1)	PROP. 6" AGGREGATE BASE COURSE	(VI)	INCIDENTAL MILLING (SEE MILLING DETAIL VI)
(D1)	PROP. APPROX. 4.0" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YARD.	(R1)	2'-6" CONCRETE CURB AND GUTTER		

NOTE: PAVEMENT EDGES ARE 1:1 UNLESS OTHERWISE NOTED.



▲ 5' SIDEWALK LOCATION WITH 8.5' BERM:
STA. 10+25 TO STA. 12+50 LT

▲ SHARED-USE PATH LOCATION:
STA. 12+50 TO STA. 18+48 LT
STA. 20+98 TO STA. 22+76 LT


TYPICAL SECTION NO. 1

-L- STA. 10+25.00 TO STA. 18+73.00 (BEGIN BRIDGE)
-L- STA. 20+73.00 (END BRIDGE) TO STA. 29+50.00

TRANSITION TO APPROACH SLAB:
STA. 18+08 TO STA. 18+48
STA. 20+98 TO STA. 21+38


▲ 4'-0" BERM WIDTH
STA. 10+25 TO 15+09 RT

▲ SHARED-USE PATH LOCATION:
STA. 15+50 TO STA. 18+48 RT
STA. 20+98 TO STA. 29+50 RT

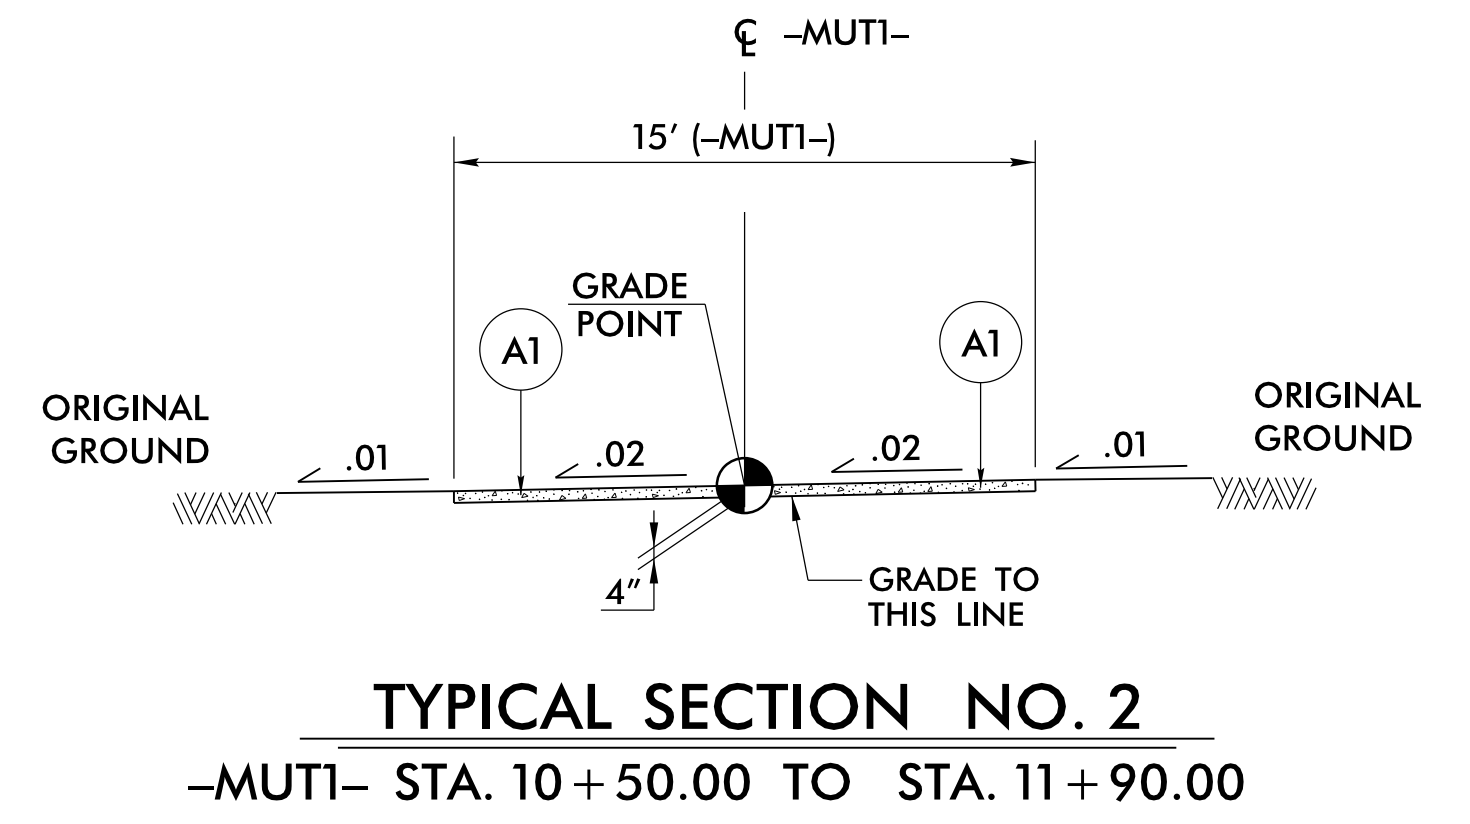


TYPICAL SECTION NO. 2

-MUTI- STA. 10+50.00 TO STA. 11+90.00

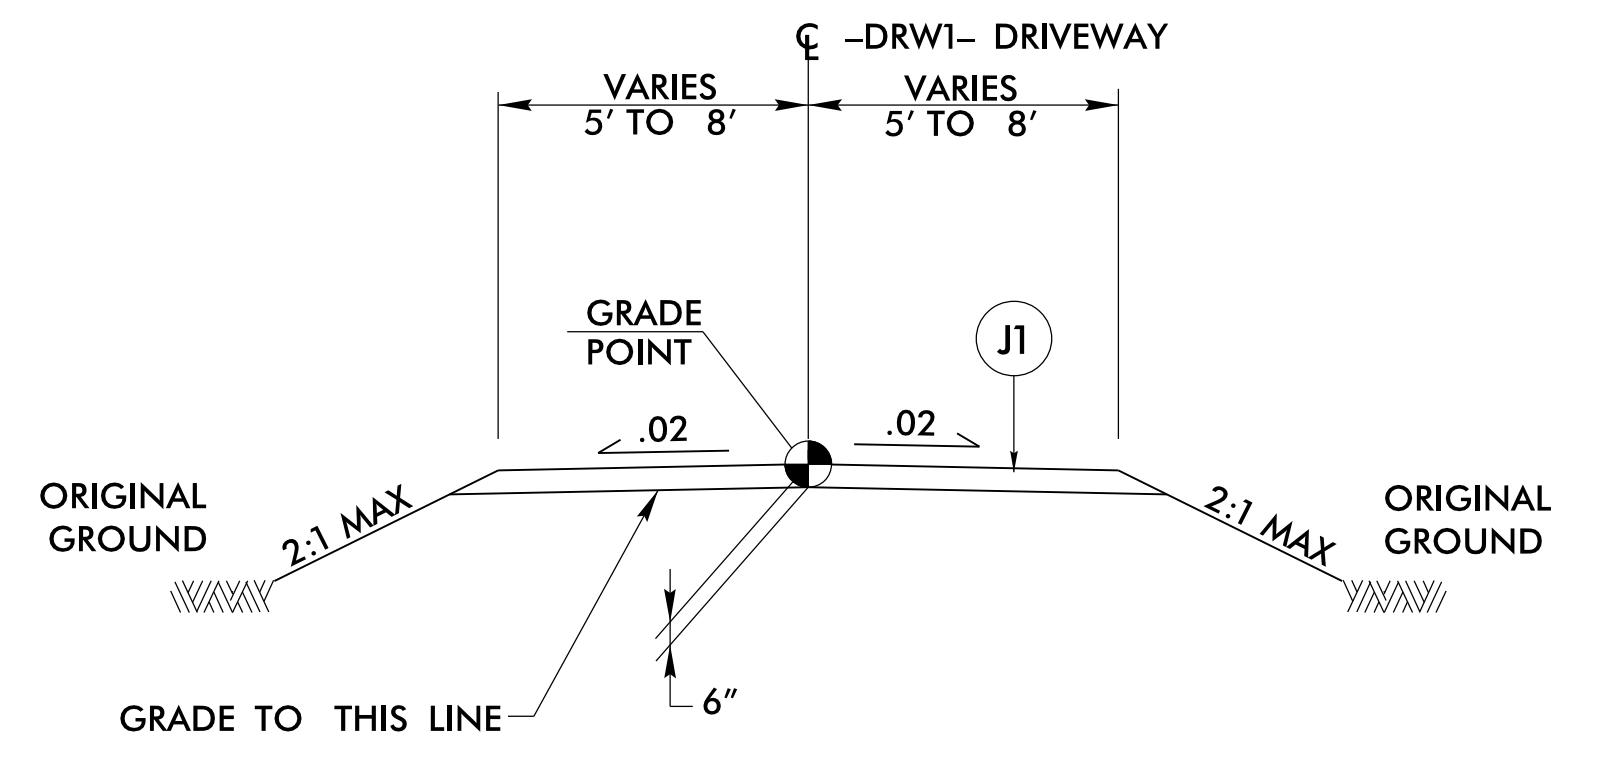

TYPICAL SECTION NO. 3

-DRW1- STA. 10+32.54 TO STA. 12+00.00

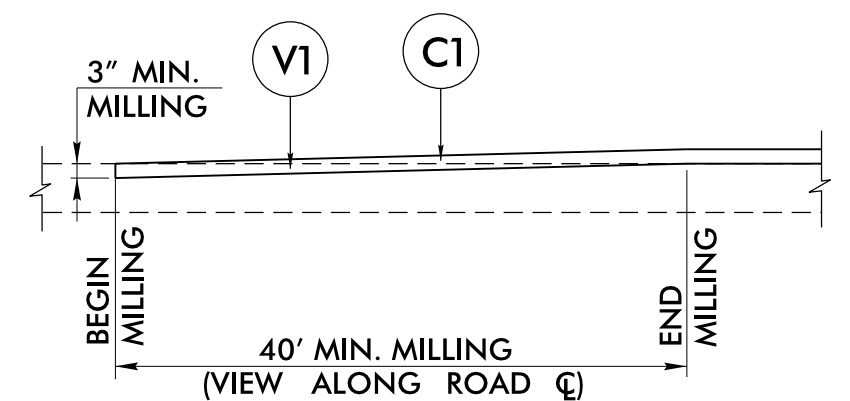

INCIDENTAL MILLING DETAIL - V1

-L- STA. 10+25.00 TO 10+65.00

9/22/2022 3:16:08 PM P:\P_02A-1.dgn