
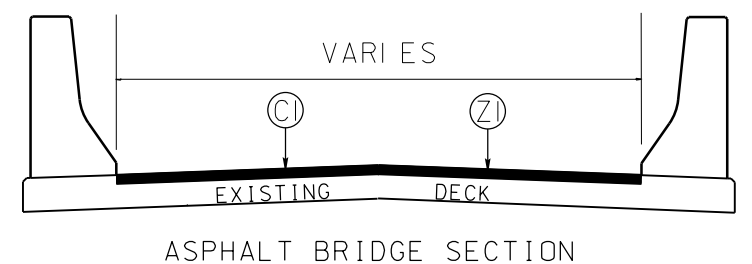
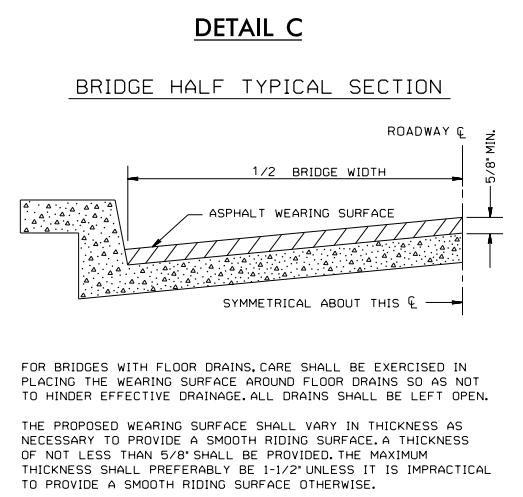
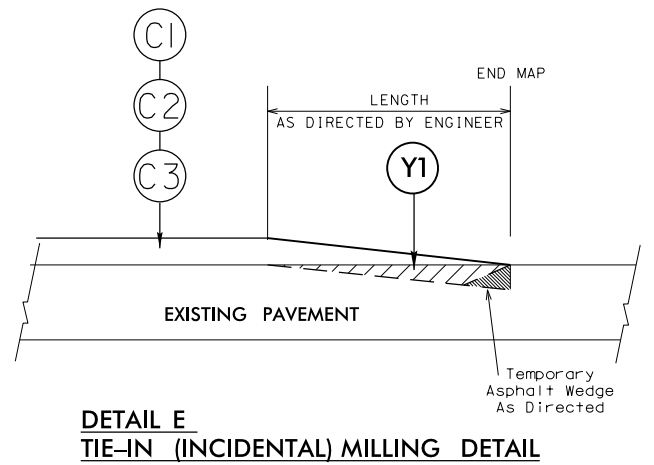
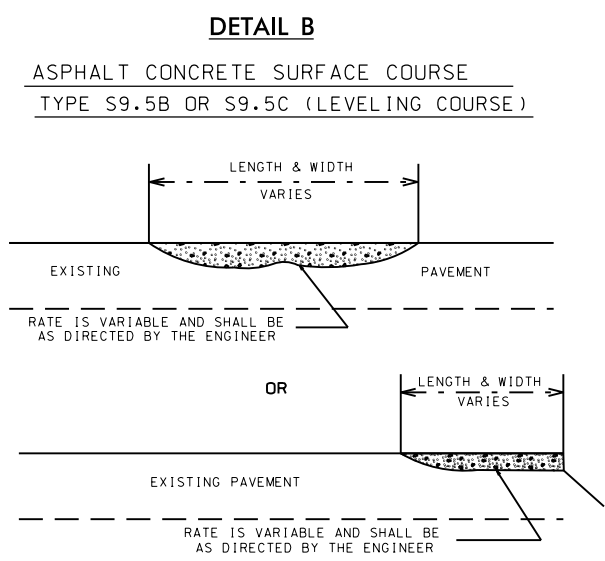
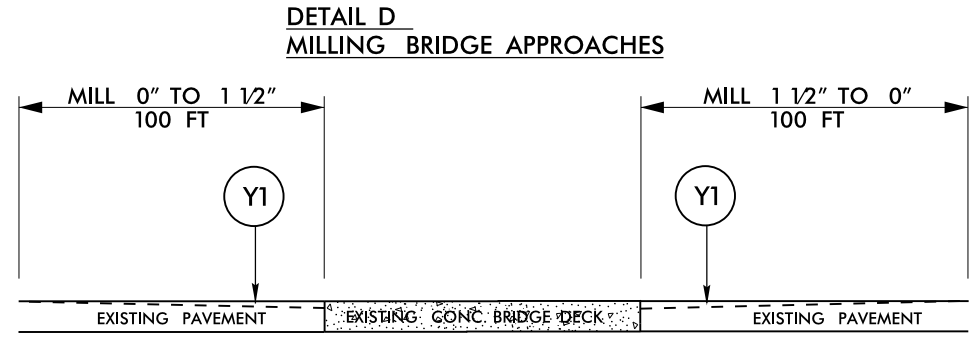


STATE	PROJECT WBS	SHEET NUMBER
NC	2016CPT.12.05.10181	13
	2016CPT.12.05.20181	

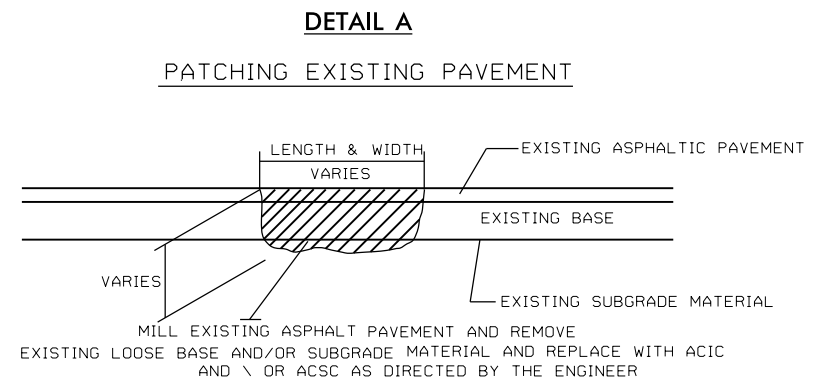

PAVEMENT SCHEDULE

C1	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 1 1/2" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C3	PROP. APPROX. 1" ASPHALT CONCRETE SURFACE COURSE, TYPE SF9.5A AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD.
E	PROP. APPROX. 8.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0B AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD., IN EACH OF TWO LIFTS.
F1	ASPHALT SURFACT TREATMENT, MATCOAT #67 STONE
F2	ASPHALT SURFACT TREATMENT, MATCOAT #78M STONE
T	AGGREGATE SHOULDER BORROW (SHOULDER RECONSTRUCTION)
Z1	MILL ASPHALT PAVEMENT APPROXIMATELY 1.5" DEPTH
Z2	MILL ASPHALT PAVEMENT APPROXIMATELY 3.0" DEPTH
Y1	INCIDENTAL MILLING

2016-2017
Resurfacing Program
Typical Sections
Catawba County NC

Checked by: _____
Drawn by: G. Brittain