

**This electronic collection of documents is provided  
for the convenience of the user  
and is Not a Certified Document –**

**The documents contained herein were originally issued  
and sealed by the individuals whose names and license  
numbers appear on each page, on the dates appearing  
with their signature on that page.**

**This file or an individual page  
shall not be considered a certified document.**

REFERENCE: B-5652

PROJECT: 45607

STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS  
GEOTECHNICAL ENGINEERING UNIT

STRUCTURE  
SUBSURFACE INVESTIGATION

COUNTY ONSLow  
PROJECT DESCRIPTION BRIDGE NO. 33 ON US 17 NBL  
OVER WOLF SWAMP AT -L RT- STA. 20 + 64

BRIDGE NO. 33 DETOUR ON -LDET- OVER WOLF  
SWAMP AT -LDET- STA. 19 + 22

CONTENTS

SHEET NO.	DESCRIPTION
1	TITLE SHEET
2	LEGEND (SOIL & ROCK)
3	SITE PLAN
4-5	PROFILES
6-9	BORE LOGS
10	SOIL TEST RESULTS
11	SITE PHOTOGRAPH(S)

STATE	STATE PROJECT REFERENCE NO.	SHEET NO.	TOTAL SHEETS
N.C.	B-5652	1	11

CAUTION NOTICE

THE SUBSURFACE INFORMATION AND THE SUBSURFACE INVESTIGATION ON WHICH IT IS BASED WERE MADE FOR THE PURPOSE OF STUDY, PLANNING AND DESIGN, AND NOT FOR CONSTRUCTION OR PAY PURPOSES. THE VARIOUS FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA AVAILABLE MAY BE REVIEWED OR INSPECTED IN RALEIGH BY CONTACTING THE N. C. DEPARTMENT OF TRANSPORTATION, GEOTECHNICAL ENGINEERING UNIT AT 1919 T07-6850. THE SUBSURFACE PLANS AND REPORTS, FIELD BORING LOGS, ROCK CORES AND SOIL TEST DATA ARE NOT PART OF THE CONTRACT.

GENERAL SOIL AND ROCK STRATA DESCRIPTIONS AND INDICATED BOUNDARIES ARE BASED ON A GEOTECHNICAL INTERPRETATION OF ALL AVAILABLE SUBSURFACE DATA AND MAY NOT NECESSARILY REFLECT THE ACTUAL SUBSURFACE CONDITIONS BETWEEN BORINGS OR BETWEEN SAMPLED STRATA WITHIN THE BOREHOLE. THE LABORATORY SAMPLE DATA AND THE IN SITU (IN-PLACE) TEST DATA CAN BE RELIED ON ONLY TO THE DEGREE OF RELIABILITY INHERENT IN THE STANDARD TEST METHOD. THE OBSERVED WATER LEVELS OR SOIL MOISTURE CONDITIONS INDICATED IN THE SUBSURFACE INVESTIGATIONS ARE AS RECORDED AT THE TIME OF THE INVESTIGATION. THESE WATER LEVELS OR SOIL MOISTURE CONDITIONS MAY VARY CONSIDERABLY WITH TIME ACCORDING TO CLIMATIC CONDITIONS INCLUDING TEMPERATURES, PRECIPITATION AND WIND, AS WELL AS OTHER NON-CLIMATIC FACTORS.

THE BIDDER OR CONTRACTOR IS CAUTIONED THAT DETAILS SHOWN ON THE SUBSURFACE PLANS ARE PRELIMINARY ONLY AND IN MANY CASES THE FINAL DESIGN DETAILS ARE DIFFERENT. FOR BIDDING AND CONSTRUCTION PURPOSES, REFER TO THE CONSTRUCTION PLANS AND DOCUMENTS FOR FINAL DESIGN INFORMATION ON THIS PROJECT. THE DEPARTMENT DOES NOT WARRANT OR GUARANTEE THE SUFFICIENCY OR ACCURACY OF THE INVESTIGATION MADE, NOR THE INTERPRETATIONS MADE, OR OPINION OF THE DEPARTMENT AS TO THE TYPE OF MATERIALS AND CONDITIONS TO BE ENCOUNTERED. THE BIDDER OR CONTRACTOR IS CAUTIONED TO MAKE SUCH INDEPENDENT SUBSURFACE INVESTIGATIONS AS HE DEEMS NECESSARY TO SATISFY HIMSELF AS TO CONDITIONS TO BE ENCOUNTERED ON THE PROJECT. THE CONTRACTOR SHALL HAVE NO CLAIM FOR ADDITIONAL COMPENSATION OR FOR AN EXTENSION OF TIME FOR ANY REASON RESULTING FROM THE ACTUAL CONDITIONS ENCOUNTERED AT THE SITE DIFFERING FROM THOSE INDICATED IN THE SUBSURFACE INFORMATION.

- NOTES:
1. THE INFORMATION CONTAINED HEREIN IS NOT IMPLIED OR GUARANTEED BY THE N. C. DEPARTMENT OF TRANSPORTATION AS ACCURATE NOR IS IT CONSIDERED PART OF THE PLANS, SPECIFICATIONS OR CONTRACT FOR THE PROJECT.
  2. BY HAVING REQUESTED THIS INFORMATION, THE CONTRACTOR SPECIFICALLY WAIVES ANY CLAIMS FOR INCREASED COMPENSATION OR EXTENSION OF TIME BASED ON DIFFERENCES BETWEEN THE CONDITIONS INDICATED HEREIN AND THE ACTUAL CONDITIONS AT THE PROJECT SITE.

PERSONNEL

J. HOLLAND

K. SWAIN

J. EDMONDSON


INVESTIGATED BY J. HOLLAND

DRAWN BY S. V. HUDSON, LG

CHECKED BY J. LEE STONE, LG

SUBMITTED BY S. V. HUDSON, LG

DATE MAY 2019



DocuSigned by: Steve V Hudson 8/7/2019


01DB23BB746D469...  
SIGNATURE DATE


DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED

NORTH CAROLINA DEPARTMENT OF TRANSPORTATION  
DIVISION OF HIGHWAYS  
GEOTECHNICAL ENGINEERING UNIT  
**SUBSURFACE INVESTIGATION**  
SOIL AND ROCK LEGEND, TERMS, SYMBOLS, AND ABBREVIATIONS


<p><b>SOIL DESCRIPTION</b></p> <p>SOIL IS CONSIDERED UNCONSOLIDATED, SEMI-CONSOLIDATED, OR WEATHERED EARTH MATERIALS THAT CAN BE PENETRATED WITH A CONTINUOUS FLIGHT POWER AUGER AND YIELD LESS THAN 100 BLOWS PER FOOT ACCORDING TO THE STANDARD PENETRATION TEST (AASHTO T 206, ASTM D1586). SOIL CLASSIFICATION IS BASED ON THE AASHTO SYSTEM. BASIC DESCRIPTIONS GENERALLY INCLUDE THE FOLLOWING: CONSISTENCY, COLOR, TEXTURE, MOISTURE, AASHTO CLASSIFICATION, AND OTHER PERTINENT FACTORS SUCH AS MINERALOGICAL COMPOSITION, ANGULARITY, STRUCTURE, PLASTICITY, ETC. FOR EXAMPLE, <i>VERY STIFF, GRAY, SILTY CLAY, MOIST WITH INTERBEDDED FINE SAND LAYERS, HIGHLY PLASTIC, A-7-6</i></p>										<p><b>GRADATION</b></p> <p><u>WELL GRADED</u> - INDICATES A GOOD REPRESENTATION OF PARTICLE SIZES FROM FINE TO COARSE. <u>UNIFORMLY GRADED</u> - INDICATES THAT SOIL PARTICLES ARE ALL APPROXIMATELY THE SAME SIZE. <u>GAP-GRADED</u> - INDICATES A MIXTURE OF UNIFORM PARTICLE SIZES OF TWO OR MORE SIZES.</p>										<p><b>ROCK DESCRIPTION</b></p> <p>HARD ROCK IS NON-COASTAL PLAIN MATERIAL THAT WOULD YIELD SPT REFUSAL IF TESTED, AN INFERRED ROCK LINE INDICATES THE LEVEL AT WHICH NON-COASTAL PLAIN MATERIAL WOULD YIELD SPT REFUSAL. SPT REFUSAL IS PENETRATION BY A SPLIT SPOON SAMPLER EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS IN NON-COASTAL PLAIN MATERIAL. THE TRANSITION BETWEEN SOIL AND ROCK IS OFTEN REPRESENTED BY A ZONE OF WEATHERED ROCK. ROCK MATERIALS ARE TYPICALLY DIVIDED AS FOLLOWS:</p>										<p><b>TERMS AND DEFINITIONS</b></p> <p><u>ALLUVIUM (ALLUV.)</u> - SOILS THAT HAVE BEEN TRANSPORTED BY WATER. <u>AQUIFER</u> - A WATER BEARING FORMATION OR STRATA. <u>ARENACEOUS</u> - APPLIED TO ROCKS THAT HAVE BEEN DERIVED FROM SAND OR THAT CONTAIN SAND. <u>ARGILLACEOUS</u> - APPLIED TO ALL ROCKS OR SUBSTANCES COMPOSED OF CLAY MINERALS, OR HAVING A NOTABLE PROPORTION OF CLAY IN THEIR COMPOSITION, SUCH AS SHALE, SLATE, ETC. <u>ARTESIAN</u> - GROUND WATER THAT IS UNDER SUFFICIENT PRESSURE TO RISE ABOVE THE LEVEL AT WHICH IT IS ENCOUNTERED, BUT WHICH DOES NOT NECESSARILY RISE TO OR ABOVE THE GROUND SURFACE. <u>CALCAREOUS (CALC.)</u> - SOILS THAT CONTAIN APPRECIABLE AMOUNTS OF CALCIUM CARBONATE. <u>COLLUVIUM</u> - ROCK FRAGMENTS MIXED WITH SOIL DEPOSITED BY GRAVITY ON SLOPE OR AT BOTTOM OF SLOPE. <u>CORE RECOVERY (REC.)</u> - TOTAL LENGTH OF ALL MATERIAL RECOVERED IN THE CORE BARREL DIVIDED BY TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. <u>DIKE</u> - A TABULAR BODY OF IGNEOUS ROCK THAT CUTS ACROSS THE STRUCTURE OF ADJACENT ROCKS OR CUTS MASSIVE ROCK. <u>DIP</u> - THE ANGLE AT WHICH A STRATUM OR ANY PLANAR FEATURE IS INCLINED FROM THE HORIZONTAL. <u>DIP DIRECTION (DIP AZIMUTH)</u> - THE DIRECTION OR BEARING OF THE HORIZONTAL TRACE OF THE LINE OF DIP, MEASURED CLOCKWISE FROM NORTH. <u>FAULT</u> - A FRACTURE OR FRACTURE ZONE ALONG WHICH THERE HAS BEEN DISPLACEMENT OF THE SIDES RELATIVE TO ONE ANOTHER PARALLEL TO THE FRACTURE. <u>FISSILE</u> - A PROPERTY OF SPLITTING ALONG CLOSELY SPACED PARALLEL PLANES. <u>FLOAT</u> - ROCK FRAGMENTS ON SURFACE NEAR THEIR ORIGINAL POSITION AND DISLOADED FROM PARENT MATERIAL. <u>FLOOD PLAIN (FP)</u> - LAND BORDERING A STREAM, BUILT OF SEDIMENTS DEPOSITED BY THE STREAM. <u>FORMATION (FM)</u> - A MAPPABLE GEOLOGIC UNIT THAT CAN BE RECOGNIZED AND TRACED IN THE FIELD. <u>JOINT</u> - FRACTURE IN ROCK ALONG WHICH NO APPRECIABLE MOVEMENT HAS OCCURRED. <u>LEDGE</u> - A SHELF-LIKE RIDGE OR PROJECTION OF ROCK WHOSE THICKNESS IS SMALL COMPARED TO ITS LATERAL EXTENT. <u>LENS</u> - A BODY OF SOIL OR ROCK THAT THINS OUT IN ONE OR MORE DIRECTIONS. <u>MOTTLED (MOT.)</u> - IRREGULARLY MARKED WITH SPOTS OF DIFFERENT COLORS, MOTTLING IN SOILS USUALLY INDICATES POOR AERATION AND LACK OF GOOD DRAINAGE. <u>PERCHED WATER</u> - WATER MAINTAINED ABOVE THE NORMAL GROUND WATER LEVEL BY THE PRESENCE OF AN INTERVENING IMPERVIOUS STRATUM. <u>RESIDUAL (RES.) SOIL</u> - SOIL FORMED IN PLACE BY THE WEATHERING OF ROCK. <u>ROCK QUALITY DESIGNATION (RQD)</u> - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF CORE RUN AND EXPRESSED AS A PERCENTAGE. <u>SAPROLITE (SAP.)</u> - RESIDUAL SOIL THAT RETAINS THE RELIC STRUCTURE OR FABRIC OF THE PARENT ROCK. <u>SILL</u> - AN INTRUSIVE BODY OF IGNEOUS ROCK OF APPROXIMATELY UNIFORM THICKNESS AND RELATIVELY THIN COMPARED WITH ITS LATERAL EXTENT, THAT HAS BEEN EMPLACED PARALLEL TO THE BEDDING OR SCHISTOSITY OF THE INTRUDED ROCKS. <u>SLICKENISE</u> - POLISHED AND STRIATED SURFACE THAT RESULTS FROM FRICTION ALONG A FAULT OR SLIP PLANE. <u>STANDARD PENETRATION TEST (PENETRATION RESISTANCE) (SPT)</u> - NUMBER OF BLOWS (N OR BPF) OF A 140 LB. HAMMER FALLING 30 INCHES REQUIRED TO PRODUCE A PENETRATION OF 1 FOOT INTO SOIL WITH A 2 INCH OUTSIDE DIAMETER SPLIT SPOON SAMPLER. SPT REFUSAL IS PENETRATION EQUAL TO OR LESS THAN 0.1 FOOT PER 60 BLOWS. <u>STRATA CORE RECOVERY (SREC.)</u> - TOTAL LENGTH OF STRATA MATERIAL RECOVERED DIVIDED BY TOTAL LENGTH OF STRATUM AND EXPRESSED AS A PERCENTAGE. <u>STRATA ROCK QUALITY DESIGNATION (SROD)</u> - A MEASURE OF ROCK QUALITY DESCRIBED BY TOTAL LENGTH OF ROCK SEGMENTS WITHIN A STRATUM EQUAL TO OR GREATER THAN 4 INCHES DIVIDED BY THE TOTAL LENGTH OF STRATA AND EXPRESSED AS A PERCENTAGE. <u>TOPSOIL (TS.)</u> - SURFACE SOILS USUALLY CONTAINING ORGANIC MATTER.</p>																																																																																																					
<p><b>SOIL LEGEND AND AASHTO CLASSIFICATION</b></p> <table border="1"> <tr> <th>GENERAL CLASS.</th> <th colspan="4">GRANULAR MATERIALS (&lt;= 35% PASSING #200)</th> <th colspan="4">SILT-CLAY MATERIALS (&gt; 35% PASSING #200)</th> <th colspan="3">ORGANIC MATERIALS</th> </tr> <tr> <th>GROUP CLASS.</th> <th>A-1</th> <th>A-3</th> <th>A-2</th> <th>A-2</th> <th>A-4</th> <th>A-5</th> <th>A-6</th> <th>A-7</th> <th>A-1, A-2</th> <th>A-3</th> <th>A-4, A-5</th> <th>A-6, A-7</th> </tr> <tr> <th>SYMBOL</th> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> <td>[Pattern]</td> </tr> <tr> <th>% PASSING #10 #40 #200</th> <td>50 Mx 30 Mx 15 Mx</td> <td>50 Mx 25 Mx 10 Mx</td> <td>51 Mx 35 Mx 35 Mx</td> <td>40 Mx 41 Mx 10 Mx</td> <td>40 Mx 41 Mx 11 Mx</td> <td>40 Mx 41 Mx 11 Mx</td> <td>36 Mx 36 Mx 36 Mx</td> <td>36 Mx 36 Mx 36 Mx</td> <td colspan="3">GRANULAR SOILS</td> <td>SILT-CLAY SOILS</td> </tr> <tr> <th>MATERIAL PASSING #40 LL PI</th> <td colspan="4">NP</td> <td>40 Mx 41 Mx 10 Mx</td> <td>40 Mx 41 Mx 11 Mx</td> <td>40 Mx 41 Mx 11 Mx</td> <td>40 Mx 41 Mx 11 Mx</td> <td colspan="3">SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER</td> <td>HIGHLY ORGANIC SOILS</td> </tr> <tr> <th>GROUP INDEX</th> <td>0</td> <td>0</td> <td>0</td> <td>4 Mx</td> <td>8 Mx</td> <td>12 Mx</td> <td>16 Mx</td> <td>NO Mx</td> <td colspan="3"></td> <td></td> </tr> <tr> <th>USUAL TYPES OF MAJOR MATERIALS</th> <td colspan="2">STONE FRAGS. GRAVEL, AND SAND</td> <td>FINE SAND</td> <td colspan="2">SILTY OR CLAYEY GRAVEL AND SAND</td> <td>SILTY SOILS</td> <td>CLAYEY SOILS</td> <td colspan="3"></td> <td></td> </tr> <tr> <th>GEN. RATING AS SUBGRADE</th> <td colspan="4">EXCELLENT TO GOOD</td> <td colspan="3">FAIR TO POOR</td> <td>FAIR TO POOR</td> <td>POOR</td> <td colspan="3">UNSATURABLE</td> </tr> </table> <p>PI OF A-7-5 SUBGROUP IS &lt;= LL - 30 ; PI OF A-7-6 SUBGROUP IS &gt; LL - 30</p>										GENERAL CLASS.	GRANULAR MATERIALS (<= 35% PASSING #200)				SILT-CLAY MATERIALS (> 35% PASSING #200)				ORGANIC MATERIALS			GROUP CLASS.	A-1	A-3	A-2	A-2	A-4	A-5	A-6	A-7	A-1, A-2	A-3	A-4, A-5	A-6, A-7	SYMBOL	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	% PASSING #10 #40 #200	50 Mx 30 Mx 15 Mx	50 Mx 25 Mx 10 Mx	51 Mx 35 Mx 35 Mx	40 Mx 41 Mx 10 Mx	40 Mx 41 Mx 11 Mx	40 Mx 41 Mx 11 Mx	36 Mx 36 Mx 36 Mx	36 Mx 36 Mx 36 Mx	GRANULAR SOILS			SILT-CLAY SOILS	MATERIAL PASSING #40 LL PI	NP				40 Mx 41 Mx 10 Mx	40 Mx 41 Mx 11 Mx	40 Mx 41 Mx 11 Mx	40 Mx 41 Mx 11 Mx	SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER			HIGHLY ORGANIC SOILS	GROUP INDEX	0	0	0	4 Mx	8 Mx	12 Mx	16 Mx	NO Mx					USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS. GRAVEL, AND SAND		FINE SAND	SILTY OR CLAYEY GRAVEL AND SAND		SILTY SOILS	CLAYEY SOILS					GEN. RATING AS SUBGRADE	EXCELLENT TO GOOD				FAIR TO POOR			FAIR TO POOR	POOR	UNSATURABLE			<p><b>MINERALOGICAL COMPOSITION</b></p> <p>MINERAL NAMES SUCH AS QUARTZ, FELDSPAR, MICA, TALC, KAOLIN, ETC. ARE USED IN DESCRIPTIONS WHEN THEY ARE CONSIDERED OF SIGNIFICANCE.</p>										<p><b>WEATHERING</b></p> <p>FRESH - ROCK FRESH, CRYSTALS BRIGHT, FEW JOINTS MAY SHOW SLIGHT STAINING, ROCK RINGS UNDER HAMMER IF CRYSTALLINE. VERY SLIGHT (IV SLI.) - ROCK GENERALLY FRESH, JOINTS STAINED, SOME JOINTS MAY SHOW THIN CLAY COATINGS IF OPEN, CRYSTALS ON A BROKEN SPECIMEN FACE SHINE BRIGHTLY, ROCK RINGS UNDER HAMMER BLOWS IF OF A CRYSTALLINE NATURE. SLIGHT (SLI.) - ROCK GENERALLY FRESH, JOINTS STAINED AND DISCOLORATION EXTENDS INTO ROCK UP TO 1 INCH, OPEN JOINTS MAY CONTAIN CLAY. IN GRANITOID ROCKS SOME OCCASIONAL FELDSPAR CRYSTALS ARE DULL AND DISCOLORED, CRYSTALLINE ROCKS RING UNDER HAMMER BLOWS. MODERATE (MOD.) - SIGNIFICANT PORTIONS OF ROCK SHOW DISCOLORATION AND WEATHERING EFFECTS. IN GRANITOID ROCKS, MOST FELDSPARS ARE DULL, AND DISCOLORED, SOME SHOW CLAY. ROCK HAS DULL SOUND UNDER HAMMER BLOWS AND SHOWS SIGNIFICANT LOSS OF STRENGTH AS COMPARED WITH FRESH ROCK. MODERATELY SEVERE (MOD. SEV.) - ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED, IN GRANITOID ROCKS, ALL FELDSPARS DULL AND DISCOLORED AND A MAJORITY SHOW KAOLINIZATION, ROCK SHOWS SEVERE LOSS OF STRENGTH AND CAN BE EXCAVATED WITH A GEOLOGIST'S PICK. ROCK GIVES "CLUNK" SOUND WHEN STRUCK, IF TESTED, WOULD YIELD SPT REFUSAL. SEVERE (SEV.) - ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED, ROCK FABRIC CLEAR AND EVIDENT BUT REDUCED IN STRENGTH TO STRONG SOIL. IN GRANITOID ROCKS ALL FELDSPARS ARE KAOLINIZED TO SOME EXTENT, SOME FRAGMENTS OF STRONG ROCK USUALLY REMAIN, IF TESTED, WOULD YIELD SPT N VALUES &gt; 100 BPF. VERY SEVERE (IV SEV.) - ALL ROCK EXCEPT QUARTZ DISCOLORED OR STAINED, ROCK FABRIC ELEMENTS ARE DISCERNIBLE BUT MASS IS EFFECTIVELY REDUCED TO SOIL STATUS, WITH ONLY FRAGMENTS OF STRONG ROCK REMAINING, SAPROLITE IS AN EXAMPLE OF ROCK WEATHERED TO A DEGREE THAT ONLY MINOR VESTIGES OF ORIGINAL ROCK FABRIC REMAIN, IF TESTED, WOULD YIELD SPT N VALUES &lt; 100 BPF. COMPLETE - ROCK REDUCED TO SOIL, ROCK FABRIC NOT DISCERNIBLE, OR DISCERNIBLE ONLY IN SMALL AND SCATTERED CONCENTRATIONS, QUARTZ MAY BE PRESENT AS DIKES OR STRINGERS, SAPROLITE IS ALSO AN EXAMPLE.</p>									
GENERAL CLASS.	GRANULAR MATERIALS (<= 35% PASSING #200)				SILT-CLAY MATERIALS (> 35% PASSING #200)				ORGANIC MATERIALS																																																																																																																										
GROUP CLASS.	A-1	A-3	A-2	A-2	A-4	A-5	A-6	A-7	A-1, A-2	A-3	A-4, A-5	A-6, A-7																																																																																																																							
SYMBOL	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]	[Pattern]																																																																																																																							
% PASSING #10 #40 #200	50 Mx 30 Mx 15 Mx	50 Mx 25 Mx 10 Mx	51 Mx 35 Mx 35 Mx	40 Mx 41 Mx 10 Mx	40 Mx 41 Mx 11 Mx	40 Mx 41 Mx 11 Mx	36 Mx 36 Mx 36 Mx	36 Mx 36 Mx 36 Mx	GRANULAR SOILS			SILT-CLAY SOILS																																																																																																																							
MATERIAL PASSING #40 LL PI	NP				40 Mx 41 Mx 10 Mx	40 Mx 41 Mx 11 Mx	40 Mx 41 Mx 11 Mx	40 Mx 41 Mx 11 Mx	SOILS WITH LITTLE OR MODERATE AMOUNTS OF ORGANIC MATTER			HIGHLY ORGANIC SOILS																																																																																																																							
GROUP INDEX	0	0	0	4 Mx	8 Mx	12 Mx	16 Mx	NO Mx																																																																																																																											
USUAL TYPES OF MAJOR MATERIALS	STONE FRAGS. GRAVEL, AND SAND		FINE SAND	SILTY OR CLAYEY GRAVEL AND SAND		SILTY SOILS	CLAYEY SOILS																																																																																																																												
GEN. RATING AS SUBGRADE	EXCELLENT TO GOOD				FAIR TO POOR			FAIR TO POOR	POOR	UNSATURABLE																																																																																																																									
<p><b>CONSISTENCY OR DENSENESS</b></p> <table border="1"> <tr> <th>PRIMARY SOIL TYPE</th> <th>COMPACTNESS OR CONSISTENCY</th> <th>RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)</th> <th>RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT<sup>2</sup>)</th> </tr> <tr> <td>GENERALLY GRANULAR MATERIAL (NON-COESIVE)</td> <td>VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE</td> <td>&lt; 4 4 TO 10 10 TO 30 30 TO 50 &gt; 50</td> <td>N/A</td> </tr> <tr> <td>GENERALLY SILT-CLAY MATERIAL (COESIVE)</td> <td>VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD</td> <td>&lt; 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 &gt; 30</td> <td>&lt; 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 &gt; 4</td> </tr> </table>										PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT <sup>2</sup> )	GENERALLY GRANULAR MATERIAL (NON-COESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A	GENERALLY SILT-CLAY MATERIAL (COESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4	<p><b>GROUND WATER</b></p> <p> WATER LEVEL IN BORE HOLE IMMEDIATELY AFTER DRILLING  STATIC WATER LEVEL AFTER 24 HOURS  PERCHED WATER, SATURATED ZONE, OR WATER BEARING STRATA  SPRING OR SEEP</p>										<p><b>MISCELLANEOUS SYMBOLS</b></p> <table border="1"> <tr> <td> ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION</td> <td> DIP &amp; DIP DIRECTION OF ROCK STRUCTURES</td> <td> SLOPE INDICATOR INSTALLATION</td> </tr> <tr> <td> SOIL SYMBOL</td> <td> TEST BORING</td> <td> CONE PENETROMETER TEST</td> </tr> <tr> <td> ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT</td> <td> AUGER BORING</td> <td> SOUNDING ROD</td> </tr> <tr> <td> INFERRED SOIL BOUNDARY</td> <td> CORE BORING</td> <td> TEST BORING WITH CORE</td> </tr> <tr> <td> INFERRED ROCK LINE</td> <td> MONITORING WELL</td> <td> SPT N-VALUE</td> </tr> <tr> <td> ALLUVIAL SOIL BOUNDARY</td> <td> PIEZOMETER INSTALLATION</td> <td></td> </tr> </table>										ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION	DIP & DIP DIRECTION OF ROCK STRUCTURES	SLOPE INDICATOR INSTALLATION	SOIL SYMBOL	TEST BORING	CONE PENETROMETER TEST	ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT	AUGER BORING	SOUNDING ROD	INFERRED SOIL BOUNDARY	CORE BORING	TEST BORING WITH CORE	INFERRED ROCK LINE	MONITORING WELL	SPT N-VALUE	ALLUVIAL SOIL BOUNDARY	PIEZOMETER INSTALLATION																																																																									
PRIMARY SOIL TYPE	COMPACTNESS OR CONSISTENCY	RANGE OF STANDARD PENETRATION RESISTANCE (N-VALUE)	RANGE OF UNCONFINED COMPRESSIVE STRENGTH (TONS/FT <sup>2</sup> )																																																																																																																																
GENERALLY GRANULAR MATERIAL (NON-COESIVE)	VERY LOOSE LOOSE MEDIUM DENSE DENSE VERY DENSE	< 4 4 TO 10 10 TO 30 30 TO 50 > 50	N/A																																																																																																																																
GENERALLY SILT-CLAY MATERIAL (COESIVE)	VERY SOFT SOFT MEDIUM STIFF STIFF VERY STIFF HARD	< 2 2 TO 4 4 TO 8 8 TO 15 15 TO 30 > 30	< 0.25 0.25 TO 0.5 0.5 TO 1.0 1 TO 2 2 TO 4 > 4																																																																																																																																
ROADWAY EMBANKMENT (RE) WITH SOIL DESCRIPTION	DIP & DIP DIRECTION OF ROCK STRUCTURES	SLOPE INDICATOR INSTALLATION																																																																																																																																	
SOIL SYMBOL	TEST BORING	CONE PENETROMETER TEST																																																																																																																																	
ARTIFICIAL FILL (AF) OTHER THAN ROADWAY EMBANKMENT	AUGER BORING	SOUNDING ROD																																																																																																																																	
INFERRED SOIL BOUNDARY	CORE BORING	TEST BORING WITH CORE																																																																																																																																	
INFERRED ROCK LINE	MONITORING WELL	SPT N-VALUE																																																																																																																																	
ALLUVIAL SOIL BOUNDARY	PIEZOMETER INSTALLATION																																																																																																																																		
<p><b>TEXTURE OR GRAIN SIZE</b></p> <table border="1"> <tr> <th>U.S. STD. SIEVE SIZE OPENING (MM)</th> <th>4</th> <th>10</th> <th>40</th> <th>60</th> <th>200</th> <th>270</th> </tr> <tr> <td></td> <td>4.75</td> <td>2.00</td> <td>0.42</td> <td>0.25</td> <td>0.075</td> <td>0.053</td> </tr> </table> <table border="1"> <tr> <th>BOULDER (BLDR.)</th> <th>COBBLE (COB.)</th> <th>GRAVEL (GR.)</th> <th>COARSE SAND (CSE. SD.)</th> <th>FINE SAND (F SD.)</th> <th>SILT (SL.)</th> <th>CLAY (CL.)</th> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table> <table border="1"> <tr> <th>GRAIN SIZE</th> <th>MM</th> <th>305</th> <th>75</th> <th>2.0</th> <th>0.25</th> <th>0.05</th> <th>0.005</th> </tr> <tr> <td></td> <td>IN.</td> <td>12</td> <td>3</td> <td></td> <td></td> <td></td> <td></td> </tr> </table>										U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270		4.75	2.00	0.42	0.25	0.075	0.053	BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)								GRAIN SIZE	MM	305	75	2.0	0.25	0.05	0.005		IN.	12	3					<p><b>RECOMMENDATION SYMBOLS</b></p> <table border="1"> <tr> <td></td> <td>UNDERCUT</td> <td></td> <td>UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE</td> <td></td> <td>UNCLASSIFIED EXCAVATION - ACCEPTABLE, BUT NOT TO BE USED IN THE TOP 3 FEET OF EMBANKMENT OR BACKFILL</td> </tr> <tr> <td></td> <td>SHALLOW UNDERCUT</td> <td></td> <td>UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK</td> <td></td> <td></td> </tr> </table>											UNDERCUT		UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE		UNCLASSIFIED EXCAVATION - ACCEPTABLE, BUT NOT TO BE USED IN THE TOP 3 FEET OF EMBANKMENT OR BACKFILL		SHALLOW UNDERCUT		UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK																																																										
U.S. STD. SIEVE SIZE OPENING (MM)	4	10	40	60	200	270																																																																																																																													
	4.75	2.00	0.42	0.25	0.075	0.053																																																																																																																													
BOULDER (BLDR.)	COBBLE (COB.)	GRAVEL (GR.)	COARSE SAND (CSE. SD.)	FINE SAND (F SD.)	SILT (SL.)	CLAY (CL.)																																																																																																																													
GRAIN SIZE	MM	305	75	2.0	0.25	0.05	0.005																																																																																																																												
	IN.	12	3																																																																																																																																
	UNDERCUT		UNCLASSIFIED EXCAVATION - UNSUITABLE WASTE		UNCLASSIFIED EXCAVATION - ACCEPTABLE, BUT NOT TO BE USED IN THE TOP 3 FEET OF EMBANKMENT OR BACKFILL																																																																																																																														
	SHALLOW UNDERCUT		UNCLASSIFIED EXCAVATION - ACCEPTABLE DEGRADABLE ROCK																																																																																																																																
<p><b>SOIL MOISTURE - CORRELATION OF TERMS</b></p> <table border="1"> <tr> <th>SOIL MOISTURE SCALE (ATTERBERG LIMITS)</th> <th>FIELD MOISTURE DESCRIPTION</th> <th>GUIDE FOR FIELD MOISTURE DESCRIPTION</th> </tr> <tr> <td>LL PLASTIC RANGE (PI) PL</td> <td>- SATURATED - (SAT.)</td> <td>USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE</td> </tr> <tr> <td></td> <td>- WET - (W)</td> <td>SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE</td> </tr> <tr> <td></td> <td>- MOIST - (M)</td> <td>SOLID; AT OR NEAR OPTIMUM MOISTURE</td> </tr> <tr> <td></td> <td>- DRY - (D)</td> <td>REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE</td> </tr> </table>										SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION	LL PLASTIC RANGE (PI) PL	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE		- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE		- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE		- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE	<p><b>ABBREVIATIONS</b></p> <table border="1"> <tr> <td>AR - AUGER REFUSAL</td> <td>MED. - MEDIUM</td> <td>VST - VANE SHEAR TEST</td> </tr> <tr> <td>BT - BORING TERMINATED</td> <td>MICA - MICACEOUS</td> <td>WEA. - WEATHERED</td> </tr> <tr> <td>CL. - CLAY</td> <td>MOD. - MODERATELY</td> <td>U. - UNIT WEIGHT</td> </tr> <tr> <td>CPT - CONE PENETRATION TEST</td> <td>NP - NON PLASTIC</td> <td>U. - DRY UNIT WEIGHT</td> </tr> <tr> <td>CSE. - COARSE</td> <td>ORG. - ORGANIC</td> <td></td> </tr> <tr> <td>DPT - DILATOMETER TEST</td> <td>PMT - PRESSUREMETER TEST</td> <td></td> </tr> <tr> <td>F - FINE</td> <td>SAP. - SAPROLITIC</td> <td></td> </tr> <tr> <td>FOSS. - FOSSILIFEROUS</td> <td>SD. - SAND, SANDY</td> <td></td> </tr> <tr> <td>FRAC. - FRACTURED, FRACTURES</td> <td>SL. - SILT, SILTY</td> <td></td> </tr> <tr> <td>FRAGS. - FRAGMENTS</td> <td>SLI. - SLIGHTLY</td> <td></td> </tr> <tr> <td>HI. - HIGHLY</td> <td>TCR - TRIAXIAL REFUSAL</td> <td></td> </tr> <tr> <td></td> <td>U. - MOISTURE CONTENT</td> <td></td> </tr> <tr> <td></td> <td>V - VERY</td> <td></td> </tr> </table>										AR - AUGER REFUSAL	MED. - MEDIUM	VST - VANE SHEAR TEST	BT - BORING TERMINATED	MICA - MICACEOUS	WEA. - WEATHERED	CL. - CLAY	MOD. - MODERATELY	U. - UNIT WEIGHT	CPT - CONE PENETRATION TEST	NP - NON PLASTIC	U. - DRY UNIT WEIGHT	CSE. - COARSE	ORG. - ORGANIC		DPT - DILATOMETER TEST	PMT - PRESSUREMETER TEST		F - FINE	SAP. - SAPROLITIC		FOSS. - FOSSILIFEROUS	SD. - SAND, SANDY		FRAC. - FRACTURED, FRACTURES	SL. - SILT, SILTY		FRAGS. - FRAGMENTS	SLI. - SLIGHTLY		HI. - HIGHLY	TCR - TRIAXIAL REFUSAL			U. - MOISTURE CONTENT			V - VERY																																																											
SOIL MOISTURE SCALE (ATTERBERG LIMITS)	FIELD MOISTURE DESCRIPTION	GUIDE FOR FIELD MOISTURE DESCRIPTION																																																																																																																																	
LL PLASTIC RANGE (PI) PL	- SATURATED - (SAT.)	USUALLY LIQUID; VERY WET, USUALLY FROM BELOW THE GROUND WATER TABLE																																																																																																																																	
	- WET - (W)	SEMISOLID; REQUIRES DRYING TO ATTAIN OPTIMUM MOISTURE																																																																																																																																	
	- MOIST - (M)	SOLID; AT OR NEAR OPTIMUM MOISTURE																																																																																																																																	
	- DRY - (D)	REQUIRES ADDITIONAL WATER TO ATTAIN OPTIMUM MOISTURE																																																																																																																																	
AR - AUGER REFUSAL	MED. - MEDIUM	VST - VANE SHEAR TEST																																																																																																																																	
BT - BORING TERMINATED	MICA - MICACEOUS	WEA. - WEATHERED																																																																																																																																	
CL. - CLAY	MOD. - MODERATELY	U. - UNIT WEIGHT																																																																																																																																	
CPT - CONE PENETRATION TEST	NP - NON PLASTIC	U. - DRY UNIT WEIGHT																																																																																																																																	
CSE. - COARSE	ORG. - ORGANIC																																																																																																																																		
DPT - DILATOMETER TEST	PMT - PRESSUREMETER TEST																																																																																																																																		
F - FINE	SAP. - SAPROLITIC																																																																																																																																		
FOSS. - FOSSILIFEROUS	SD. - SAND, SANDY																																																																																																																																		
FRAC. - FRACTURED, FRACTURES	SL. - SILT, SILTY																																																																																																																																		
FRAGS. - FRAGMENTS	SLI. - SLIGHTLY																																																																																																																																		
HI. - HIGHLY	TCR - TRIAXIAL REFUSAL																																																																																																																																		
	U. - MOISTURE CONTENT																																																																																																																																		
	V - VERY																																																																																																																																		
<p><b>PLASTICITY</b></p> <table border="1"> <tr> <th>NON PLASTIC</th> <th>SLIGHTLY PLASTIC</th> <th>MODERATELY PLASTIC</th> <th>HIGHLY PLASTIC</th> </tr> <tr> <td></td> <td></td> <td></td> <td></td> </tr> </table>										NON PLASTIC	SLIGHTLY PLASTIC	MODERATELY PLASTIC	HIGHLY PLASTIC					<p><b>EQUIPMENT USED ON SUBJECT PROJECT</b></p> <table border="1"> <tr> <td>DRILL UNITS:</td> <td>ADVANCING TOOLS:</td> <td>HAMMER TYPE:</td> </tr> <tr> <td><input checked="" type="checkbox"/> CME-458</td> <td><input type="checkbox"/> CLAY BITS</td> <td><input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL</td> </tr> <tr> <td><input checked="" type="checkbox"/> CME-55</td> <td><input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER</td> <td></td> </tr> <tr> <td><input type="checkbox"/> CME-550</td> <td><input type="checkbox"/> 8" HOLLOW AUGERS</td> <td></td> </tr> <tr> <td></td> <td><input type="checkbox"/> HARD FACED FINGER BITS</td> <td></td> </tr> <tr> <td></td> <td><input type="checkbox"/> TUNG-CARBIDE INSERTS</td> <td></td> </tr> <tr> <td></td> <td><input checked="" type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER</td> <td></td> </tr> <tr> <td></td> <td><input checked="" type="checkbox"/> TRICONE <input checked="" type="checkbox"/> 2 3/8" STEEL TEETH</td> <td></td> </tr> <tr> <td></td> <td><input type="checkbox"/> TRICONE <input type="checkbox"/> TUNG-CARB.</td> <td></td> </tr> <tr> <td></td> <td><input type="checkbox"/> CORE BIT</td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </table>										DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:	<input checked="" type="checkbox"/> CME-458	<input type="checkbox"/> CLAY BITS	<input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL	<input checked="" type="checkbox"/> CME-55	<input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER		<input type="checkbox"/> CME-550	<input type="checkbox"/> 8" HOLLOW AUGERS			<input type="checkbox"/> HARD FACED FINGER BITS			<input type="checkbox"/> TUNG-CARBIDE INSERTS			<input checked="" type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER			<input checked="" type="checkbox"/> TRICONE <input checked="" type="checkbox"/> 2 3/8" STEEL TEETH			<input type="checkbox"/> TRICONE <input type="checkbox"/> TUNG-CARB.			<input type="checkbox"/> CORE BIT																																																																											
NON PLASTIC	SLIGHTLY PLASTIC	MODERATELY PLASTIC	HIGHLY PLASTIC																																																																																																																																
DRILL UNITS:	ADVANCING TOOLS:	HAMMER TYPE:																																																																																																																																	
<input checked="" type="checkbox"/> CME-458	<input type="checkbox"/> CLAY BITS	<input checked="" type="checkbox"/> AUTOMATIC <input type="checkbox"/> MANUAL																																																																																																																																	
<input checked="" type="checkbox"/> CME-55	<input type="checkbox"/> 6" CONTINUOUS FLIGHT AUGER																																																																																																																																		
<input type="checkbox"/> CME-550	<input type="checkbox"/> 8" HOLLOW AUGERS																																																																																																																																		
	<input type="checkbox"/> HARD FACED FINGER BITS																																																																																																																																		
	<input type="checkbox"/> TUNG-CARBIDE INSERTS																																																																																																																																		
	<input checked="" type="checkbox"/> CASING <input type="checkbox"/> W/ ADVANCER																																																																																																																																		
	<input checked="" type="checkbox"/> TRICONE <input checked="" type="checkbox"/> 2 3/8" STEEL TEETH																																																																																																																																		
	<input type="checkbox"/> TRICONE <input type="checkbox"/> TUNG-CARB.																																																																																																																																		
	<input type="checkbox"/> CORE BIT																																																																																																																																		
<p><b>COLOR</b></p> <p>DESCRIPTIONS MAY INCLUDE COLOR OR COLOR COMBINATIONS (TAN, RED, YELLOW-BROWN, BLUE-BROWN). MODIFIERS SUCH AS LIGHT, DARK, STREAKED, ETC. ARE USED TO DESCRIBE APPEARANCE.</p>										<p><b>FRACATURE SPACING</b></p> <table border="1"> <tr> <th>TERM</th> <th>SPACING</th> </tr> <tr> <td>VERY WIDE</td> <td>MORE THAN 10 FEET</td> </tr> <tr> <td>WIDE</td> <td>3 TO 10 FEET</td> </tr> <tr> <td>MODERATELY CLOSE</td> <td>1 TO 3 FEET</td> </tr> <tr> <td>CLOSE</td> <td>0.16 TO 1 FOOT</td> </tr> <tr> <td>VERY CLOSE</td> <td>LESS THAN 0.16 FEET</td> </tr> </table>										TERM	SPACING	VERY WIDE	MORE THAN 10 FEET	WIDE	3 TO 10 FEET	MODERATELY CLOSE	1 TO 3 FEET	CLOSE	0.16 TO 1 FOOT	VERY CLOSE	LESS THAN 0.16 FEET	<p><b>BEDDING</b></p> <table border="1"> <tr> <th>TERM</th> <th>THICKNESS</th> </tr> <tr> <td>VERY THICKLY BEDDED</td> <td>4 FEET</td> </tr> <tr> <td>THICKLY BEDDED</td> <td>1.5 - 4 FEET</td> </tr> <tr> <td>THINLY BEDDED</td> <td>0.16 - 1.5 FEET</td> </tr> <tr> <td>VERY THINLY BEDDED</td> <td>0.03 - 0.16 FEET</td> </tr> <tr> <td>THICKLY LAMINATED</td> <td>0.008 - 0.03 FEET</td> </tr> <tr> <td>THINLY LAMINATED</td> <td>&lt; 0.008 FEET</td> </tr> </table>										TERM	THICKNESS	VERY THICKLY BEDDED	4 FEET	THICKLY BEDDED	1.5 - 4 FEET	THINLY BEDDED	0.16 - 1.5 FEET	VERY THINLY BEDDED	0.03 - 0.16 FEET	THICKLY LAMINATED	0.008 - 0.03 FEET	THINLY LAMINATED	< 0.008 FEET																																																																												
TERM	SPACING																																																																																																																																		
VERY WIDE	MORE THAN 10 FEET																																																																																																																																		
WIDE	3 TO 10 FEET																																																																																																																																		
MODERATELY CLOSE	1 TO 3 FEET																																																																																																																																		
CLOSE	0.16 TO 1 FOOT																																																																																																																																		
VERY CLOSE	LESS THAN 0.16 FEET																																																																																																																																		
TERM	THICKNESS																																																																																																																																		
VERY THICKLY BEDDED	4 FEET																																																																																																																																		
THICKLY BEDDED	1.5 - 4 FEET																																																																																																																																		
THINLY BEDDED	0.16 - 1.5 FEET																																																																																																																																		
VERY THINLY BEDDED	0.03 - 0.16 FEET																																																																																																																																		
THICKLY LAMINATED	0.008 - 0.03 FEET																																																																																																																																		
THINLY LAMINATED	< 0.008 FEET																																																																																																																																		
<p><b>INDURATION</b></p> <p>FOR SEDIMENTARY ROCKS, INDURATION IS THE HARDENING OF MATERIAL BY CEMENTING, HEAT, PRESSURE, ETC.</p> <table border="1"> <tr> <td>FRIABLE</td> <td>RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.</td> </tr> <tr> <td>MODERATELY INDURATED</td> <td>GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.</td> </tr> <tr> <td>INDURATED</td> <td>GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.</td> </tr> <tr> <td>EXTREMELY INDURATED</td> <td>SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.</td> </tr> </table>										FRIABLE	RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.	MODERATELY INDURATED	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.	INDURATED	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.	EXTREMELY INDURATED	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.	<p><b>BENCH MARK: LOCATIONS AND ELEVATIONS OBTAINED WITH A SURVEY GRADE RTK GPS</b></p> <p>ELEVATION: FEET</p>																																																																																																																	
FRIABLE	RUBBING WITH FINGER FREES NUMEROUS GRAINS; GENTLE BLOW BY HAMMER DISINTEGRATES SAMPLE.																																																																																																																																		
MODERATELY INDURATED	GRAINS CAN BE SEPARATED FROM SAMPLE WITH STEEL PROBE; BREAKS EASILY WHEN HIT WITH HAMMER.																																																																																																																																		
INDURATED	GRAINS ARE DIFFICULT TO SEPARATE WITH STEEL PROBE; DIFFICULT TO BREAK WITH HAMMER.																																																																																																																																		
EXTREMELY INDURATED	SHARP HAMMER BLOWS REQUIRED TO BREAK SAMPLE; SAMPLE BREAKS ACROSS GRAINS.																																																																																																																																		
<p><b>NOTES:</b></p> <p>FIAD = FILLED IMMEDIATELY AFTER DRILLING U.C.P. = UNDIVIDED COASTAL PLAIN WSE = WATER SURFACE ELEVATION</p>										<p>DATE: 8-15-14</p>																																																																																																																									

SKEW = 90°

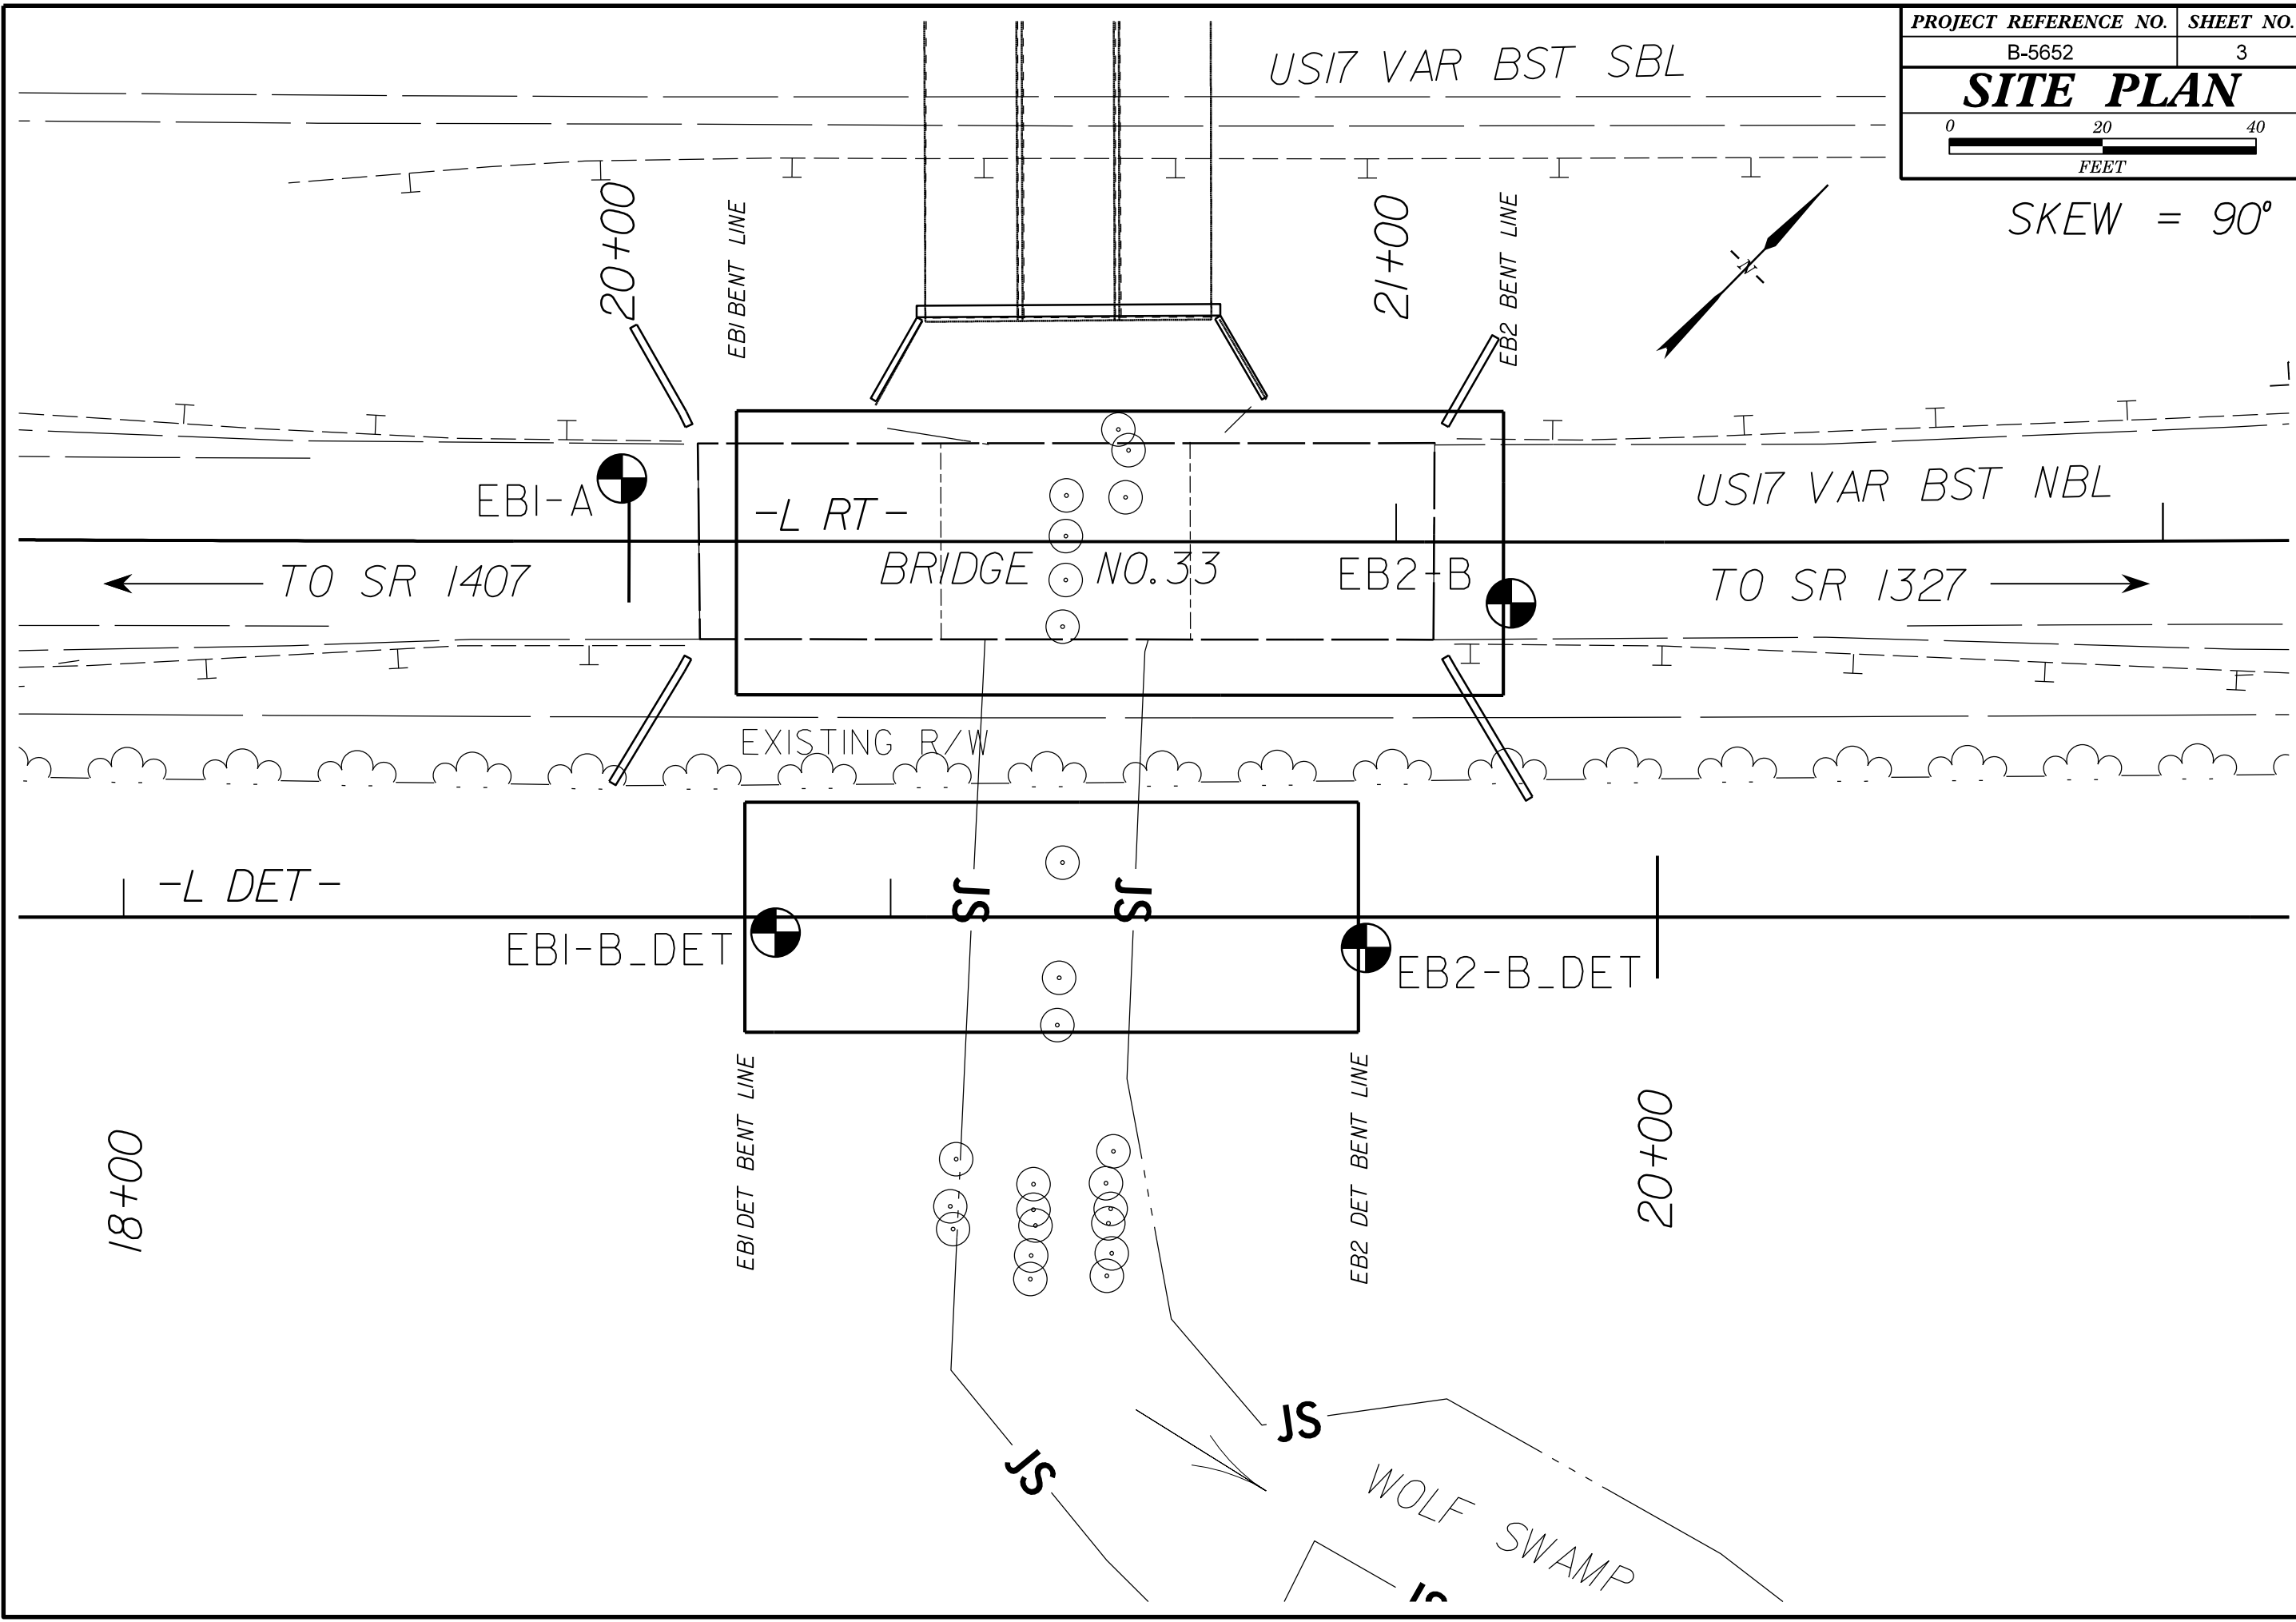




## PROFILE THROUGH BORINGS PROJECTED ALONG -L\_RT-

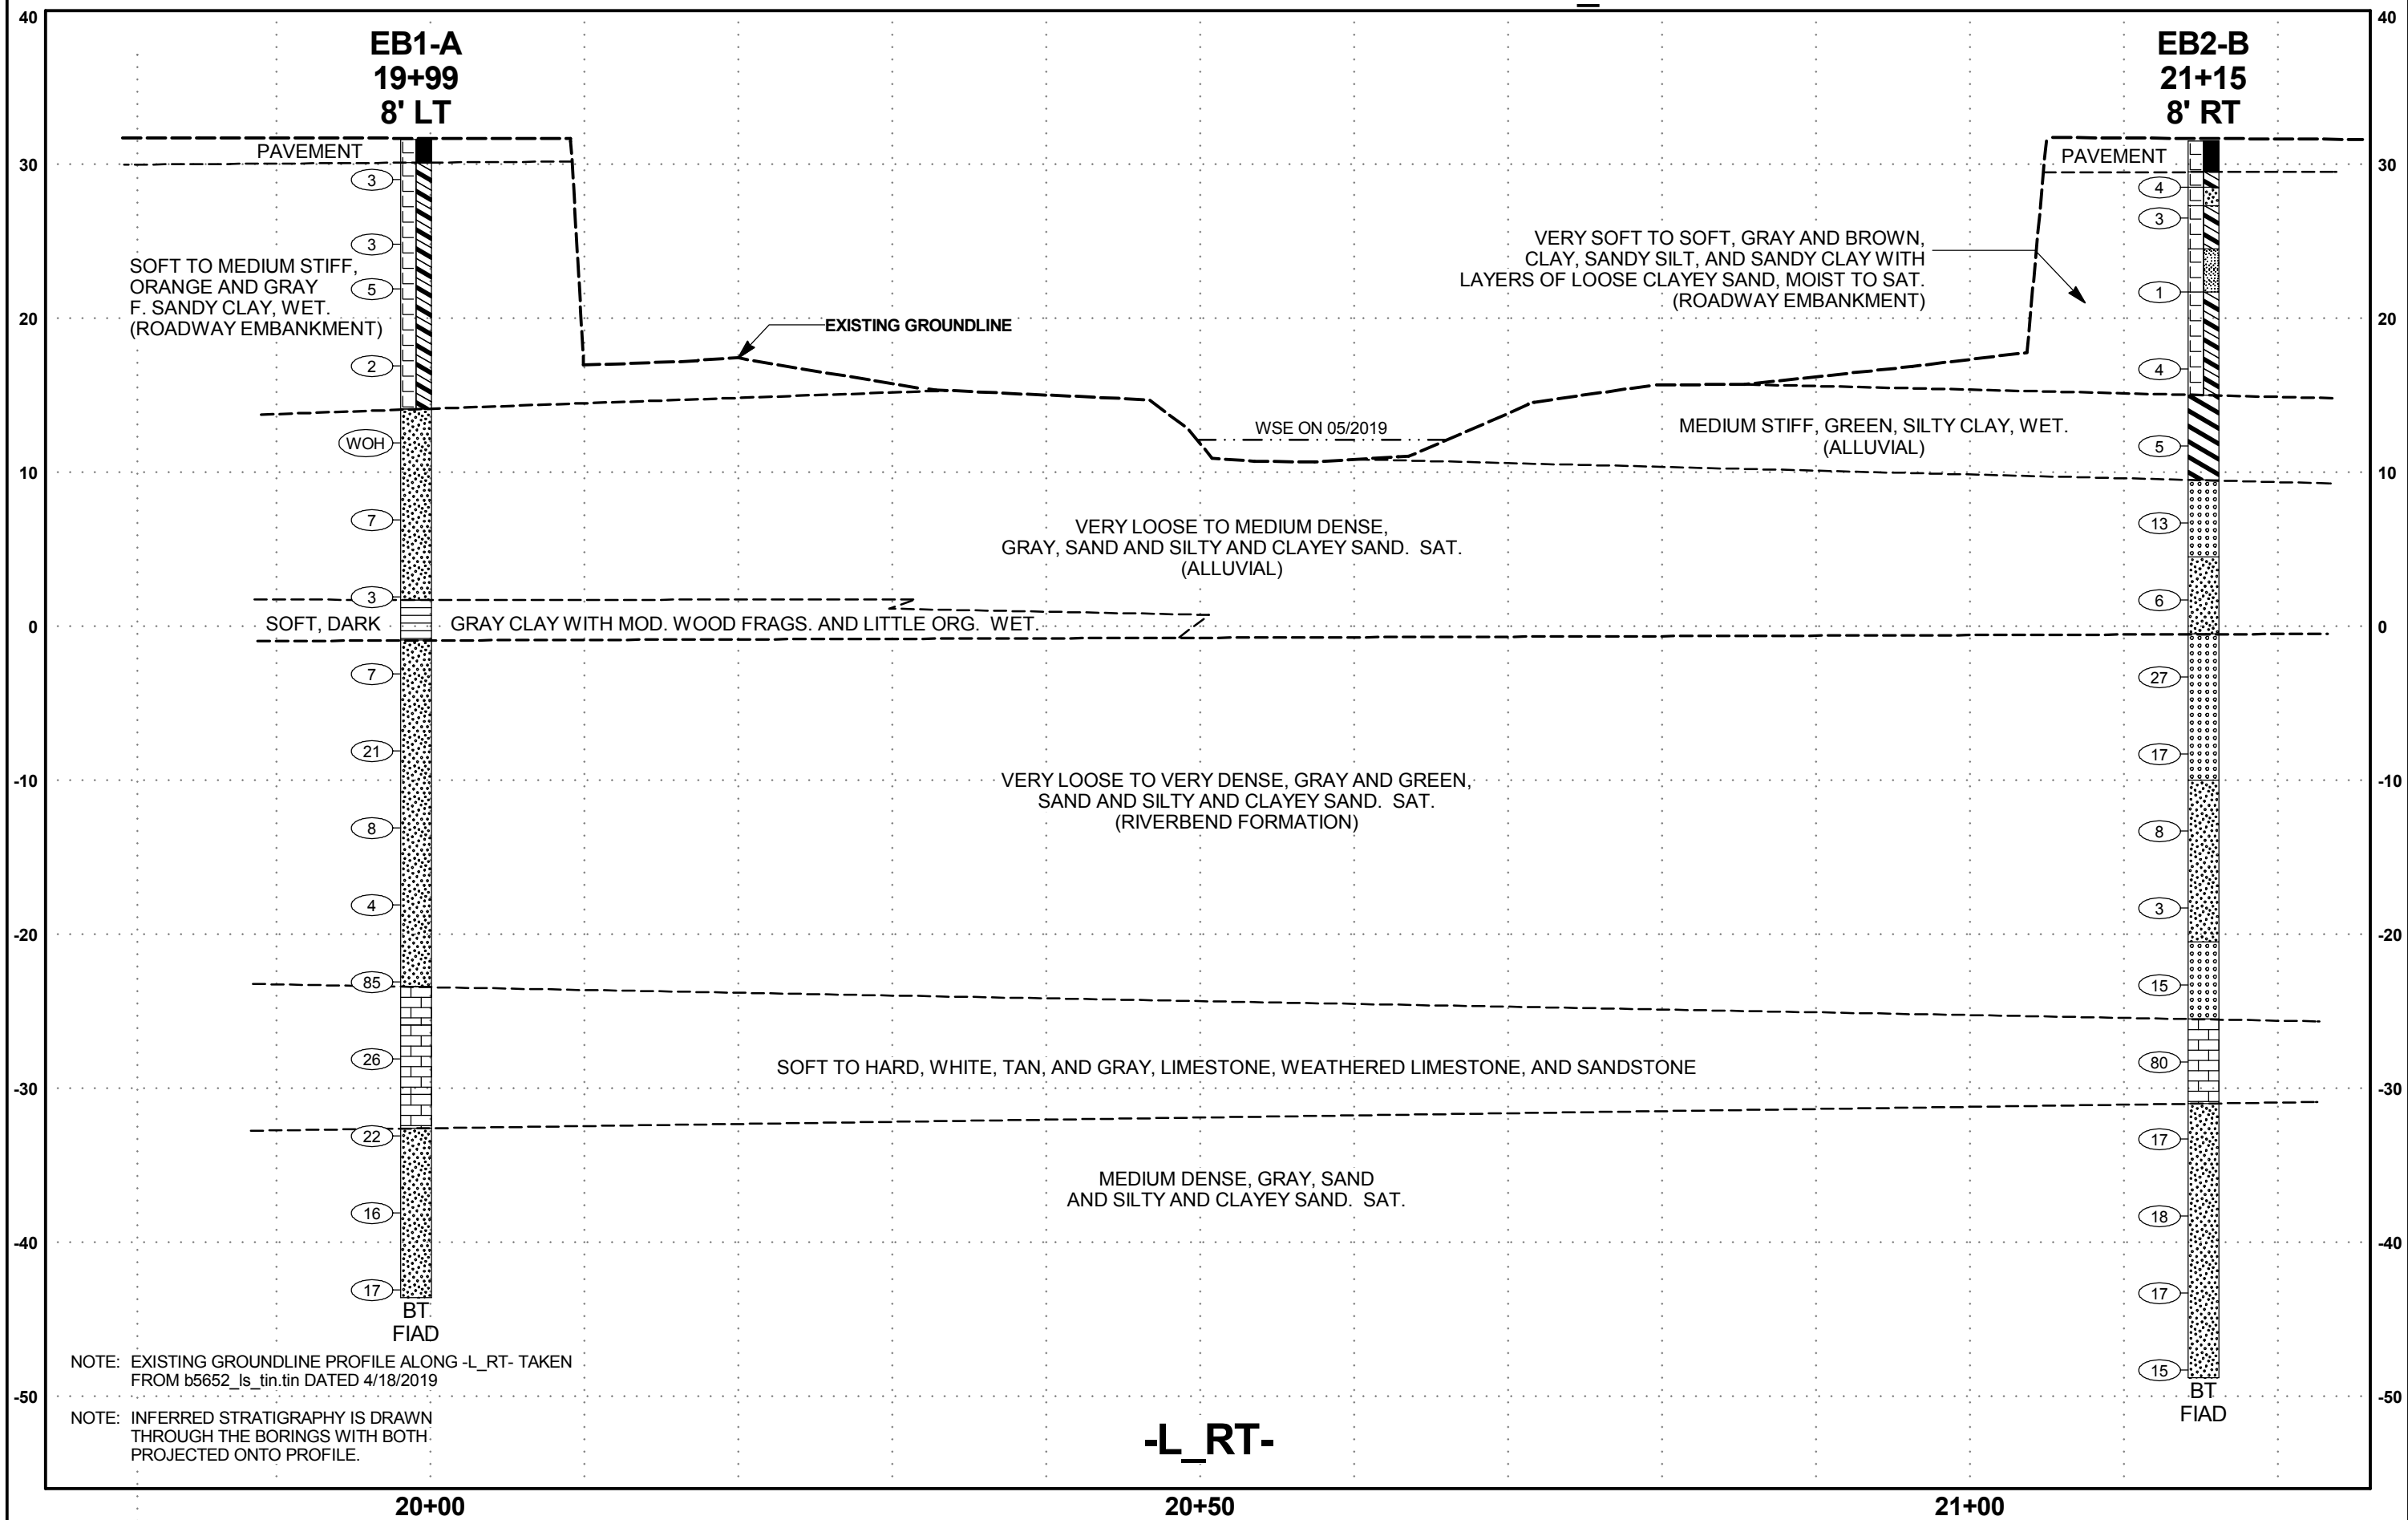


NOTE: EXISTING GROUNDLINE PROFILE ALONG -L\_RT- TAKEN FROM b5652\_ls\_tin.tin DATED 4/18/2019

NOTE: INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS WITH BOTH PROJECTED ONTO PROFILE.



PROFILE THROUGH BORINGS PROJECTED ALONG -L\_DET-

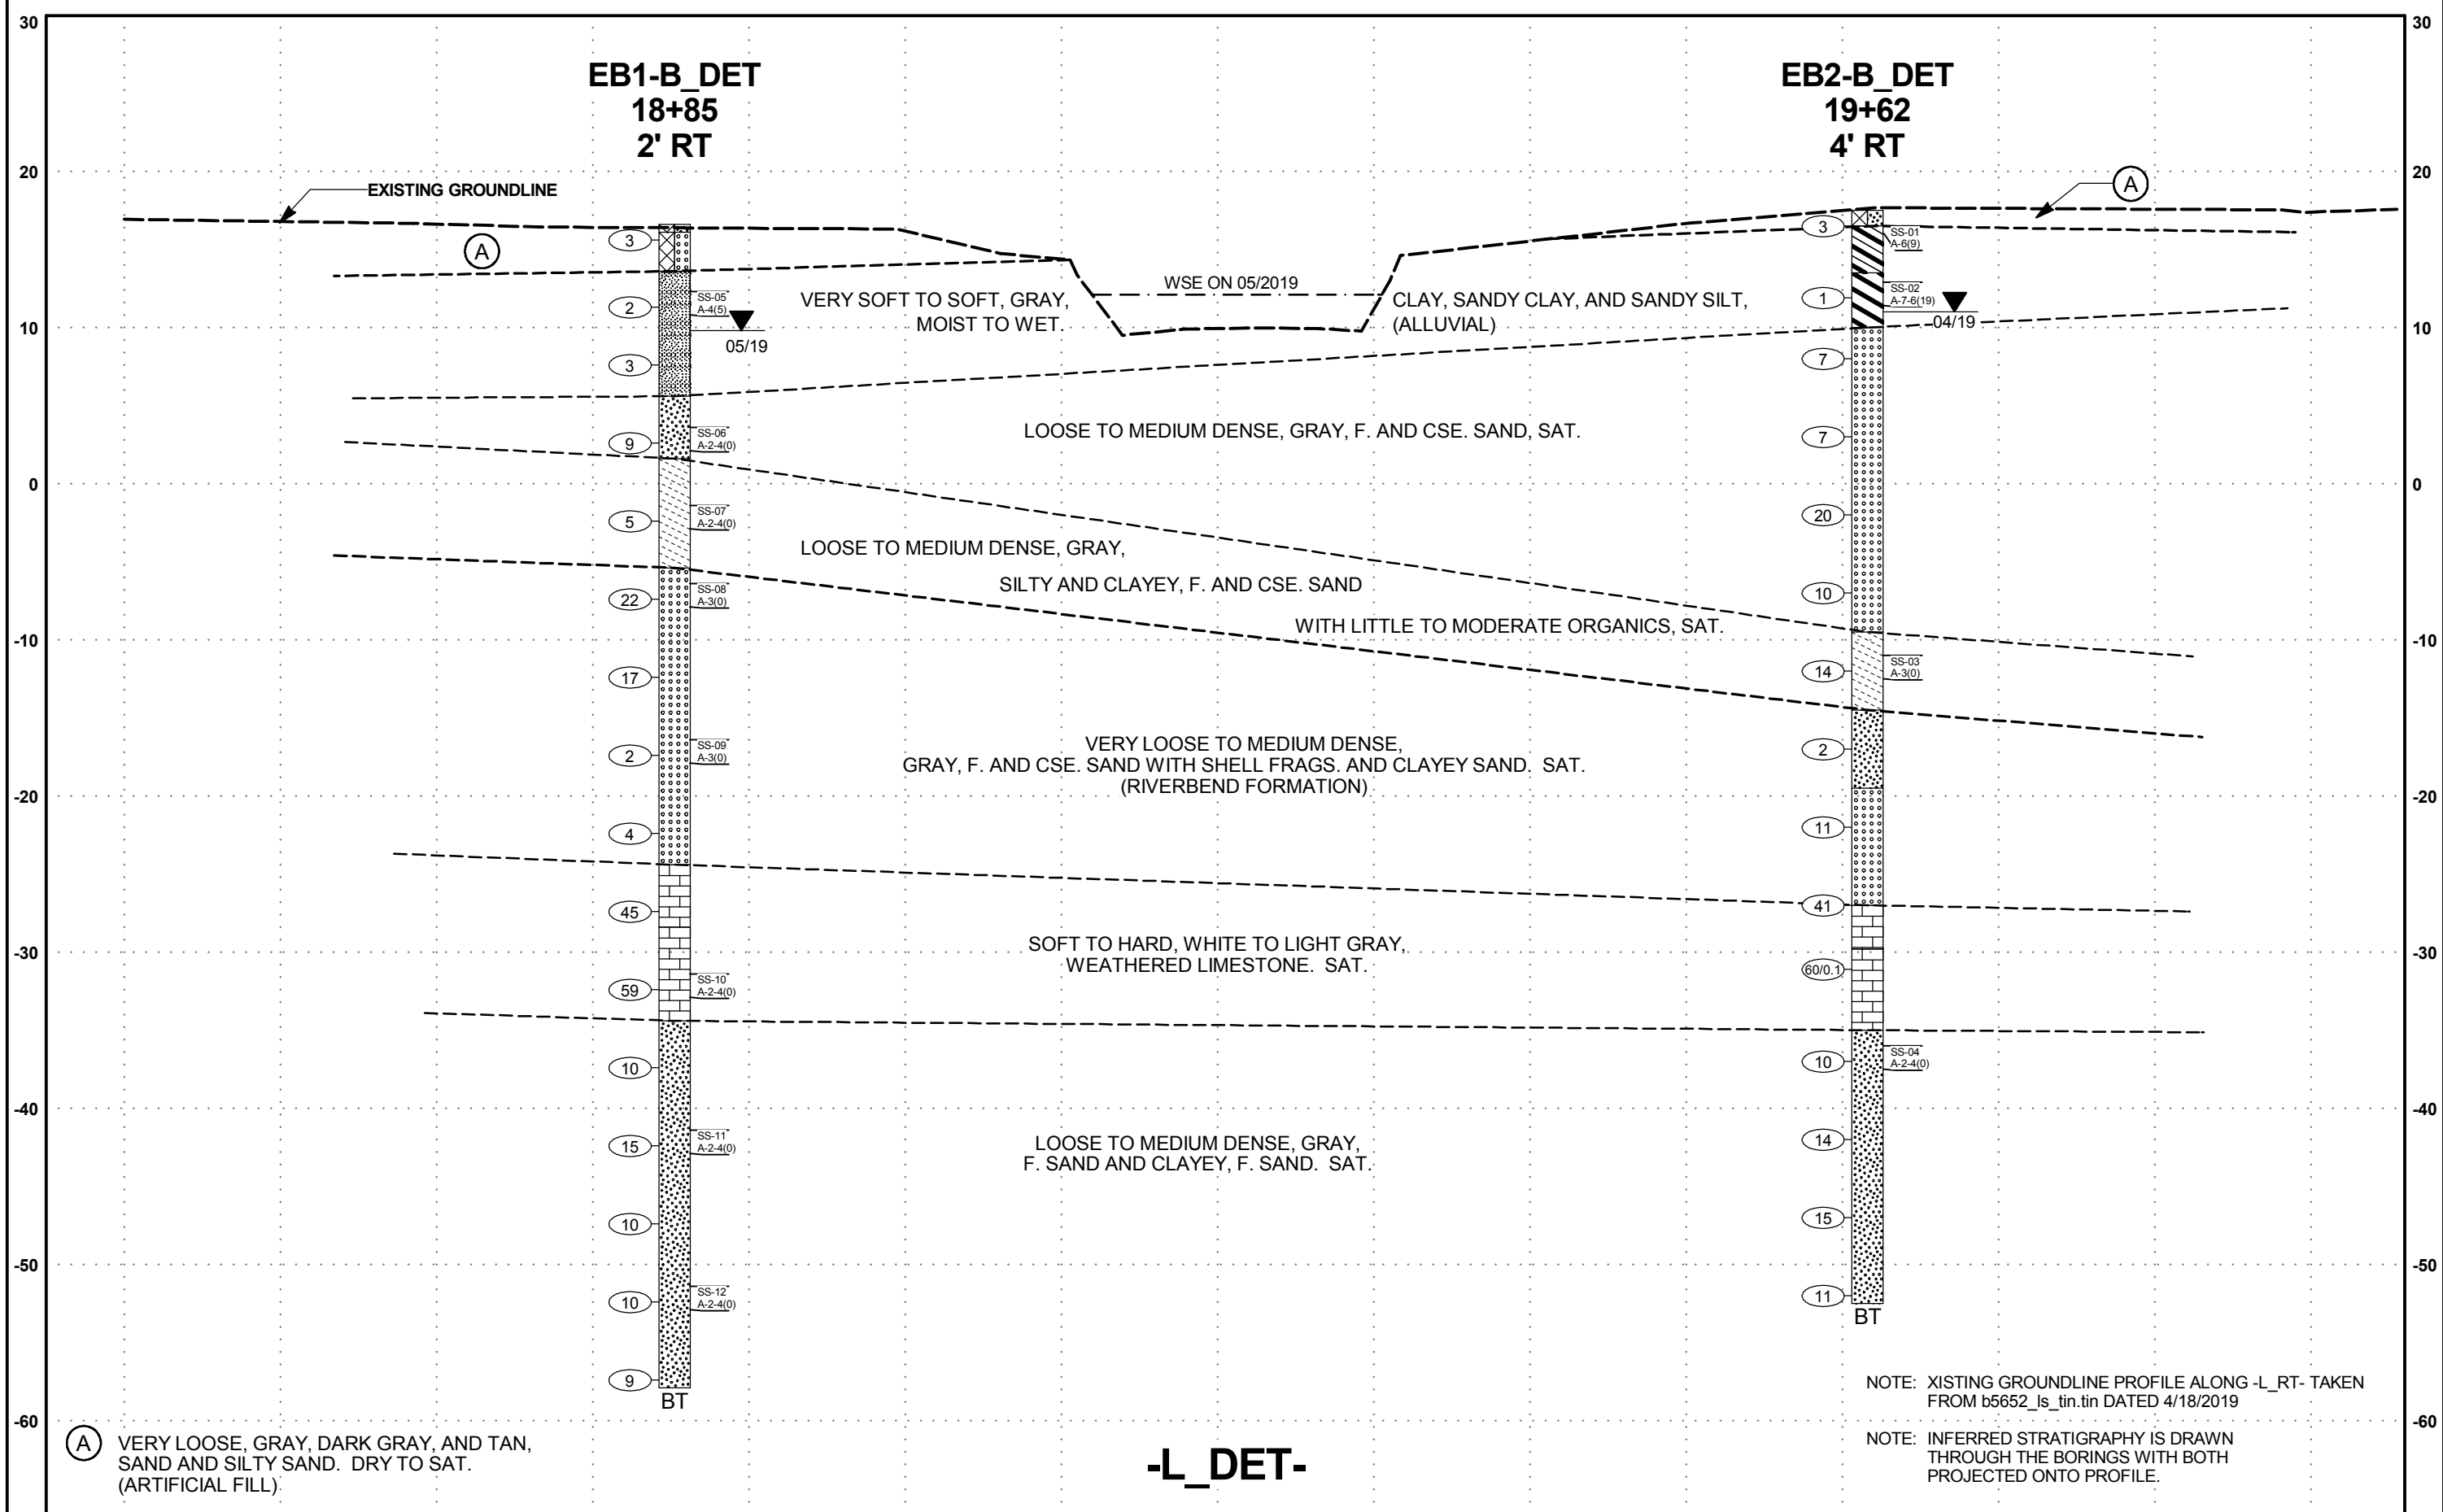

NOTE: XISTING GROUNDLINE PROFILE ALONG -L\_RT- TAKEN FROM b5652\_ls\_tin.tin DATED 4/18/2019

NOTE: INFERRED STRATIGRAPHY IS DRAWN THROUGH THE BORINGS WITH BOTH PROJECTED ONTO PROFILE.

# GEOTECHNICAL BORING REPORT BORE LOG





**PROJECT REFERENCE NO.** B-5652  
**SHEET** 6

<b>WBS:</b> 45607.1.1		<b>TIP:</b> B-5652		<b>COUNTY:</b> ONSLOW		<b>GEOLOGIST:</b> J. HOLLAND		
<b>SITE DESCRIPTION:</b> Bridge No. 33 on US 17 NBL over Wolf Swamp at -L_RT- Sta. 20+64							<b>GROUND WTR (ft)</b>	
<b>BORING NO.:</b> EB1-A		<b>STATION:</b> 19+99		<b>OFFSET:</b> 8 ft LT		<b>ALIGNMENT:</b> -L_RT-		
<b>COLLAR ELEV.:</b> 31.6 ft		<b>TOTAL DEPTH:</b> 75.2 ft		<b>NORTHING:</b> 385,360		<b>EASTING:</b> 2,491,057		
<b>DRILL RIG/HAMMER EFF./DATE:</b> CAT1314 CME-45B 94% 09/26/2018							<b>DRILL METHOD:</b> Mud Rotary	
<b>DRILLER:</b> D.T. Chalmers, Jr.							<b>START DATE:</b> 05/06/19	
<b>COMP. DATE:</b> 05/06/19							<b>SURFACE WATER DEPTH:</b> N/A	

<b>WBS:</b> 45607.1.1		<b>TIP:</b> B-5652		<b>COUNTY:</b> ONSLOW		<b>GEOLOGIST:</b> J. HOLLAND		
<b>SITE DESCRIPTION:</b> Bridge No. 33 on US 17 NBL over Wolf Swamp at -L_RT- Sta. 20+64							<b>GROUND WTR (ft)</b>	
<b>BORING NO.:</b> EB1-A		<b>STATION:</b> 19+99		<b>OFFSET:</b> 8 ft LT		<b>ALIGNMENT:</b> -L_RT-		
<b>COLLAR ELEV.:</b> 31.6 ft		<b>TOTAL DEPTH:</b> 75.2 ft		<b>NORTHING:</b> 385,360		<b>EASTING:</b> 2,491,057		
<b>DRILL RIG/HAMMER EFF./DATE:</b> CAT1314 CME-45B 94% 09/26/2018							<b>DRILL METHOD:</b> Mud Rotary	
<b>DRILLER:</b> D.T. Chalmers, Jr.							<b>START DATE:</b> 05/06/19	
<b>COMP. DATE:</b> 05/06/19							<b>SURFACE WATER DEPTH:</b> N/A	

NC DOT BORE DOUBLE B5652 GEO BRDG CATLIN.GPI.NC DOT CATLIN.GDI 05/22/19

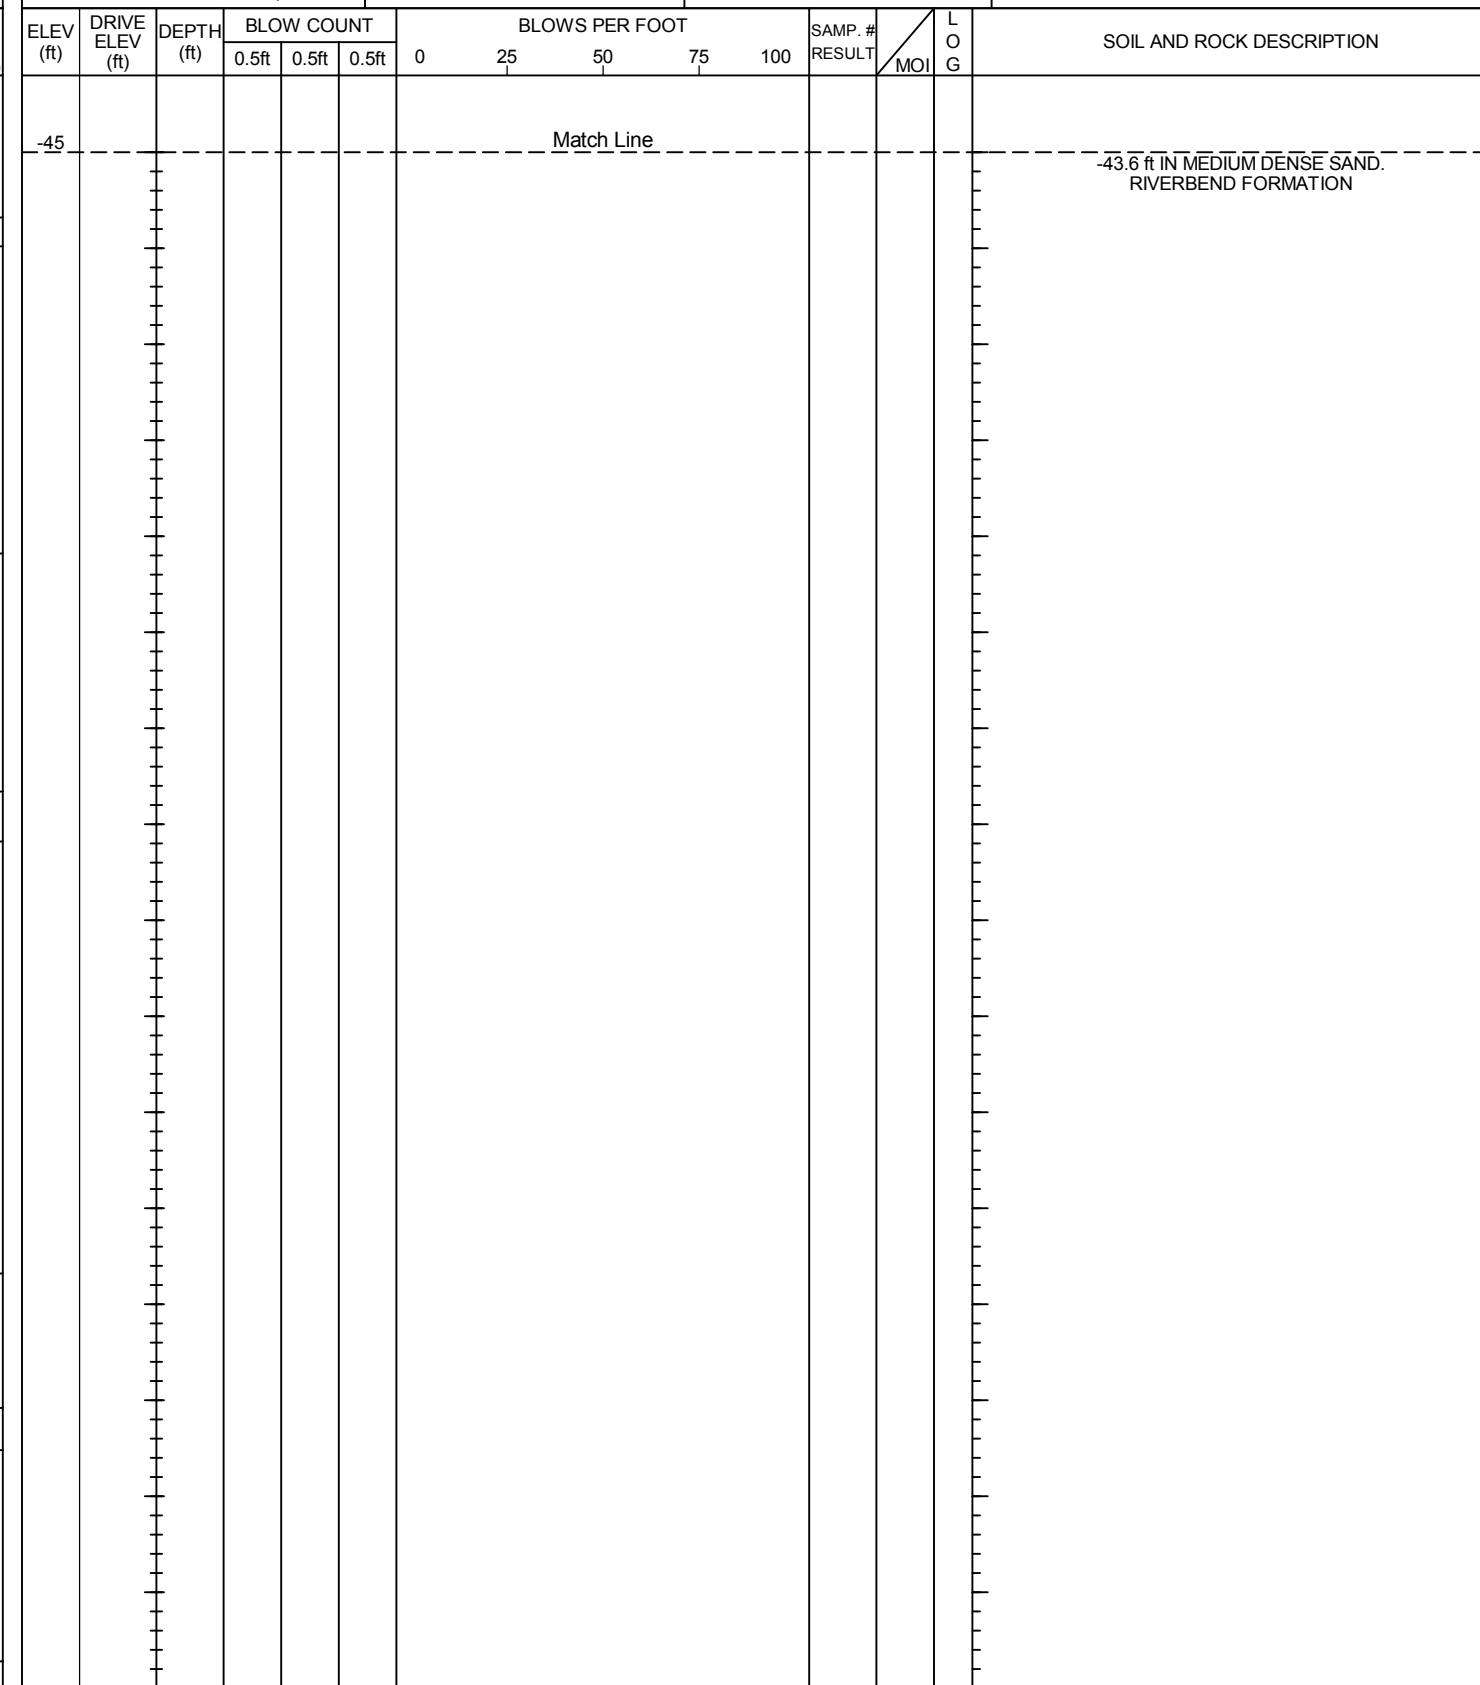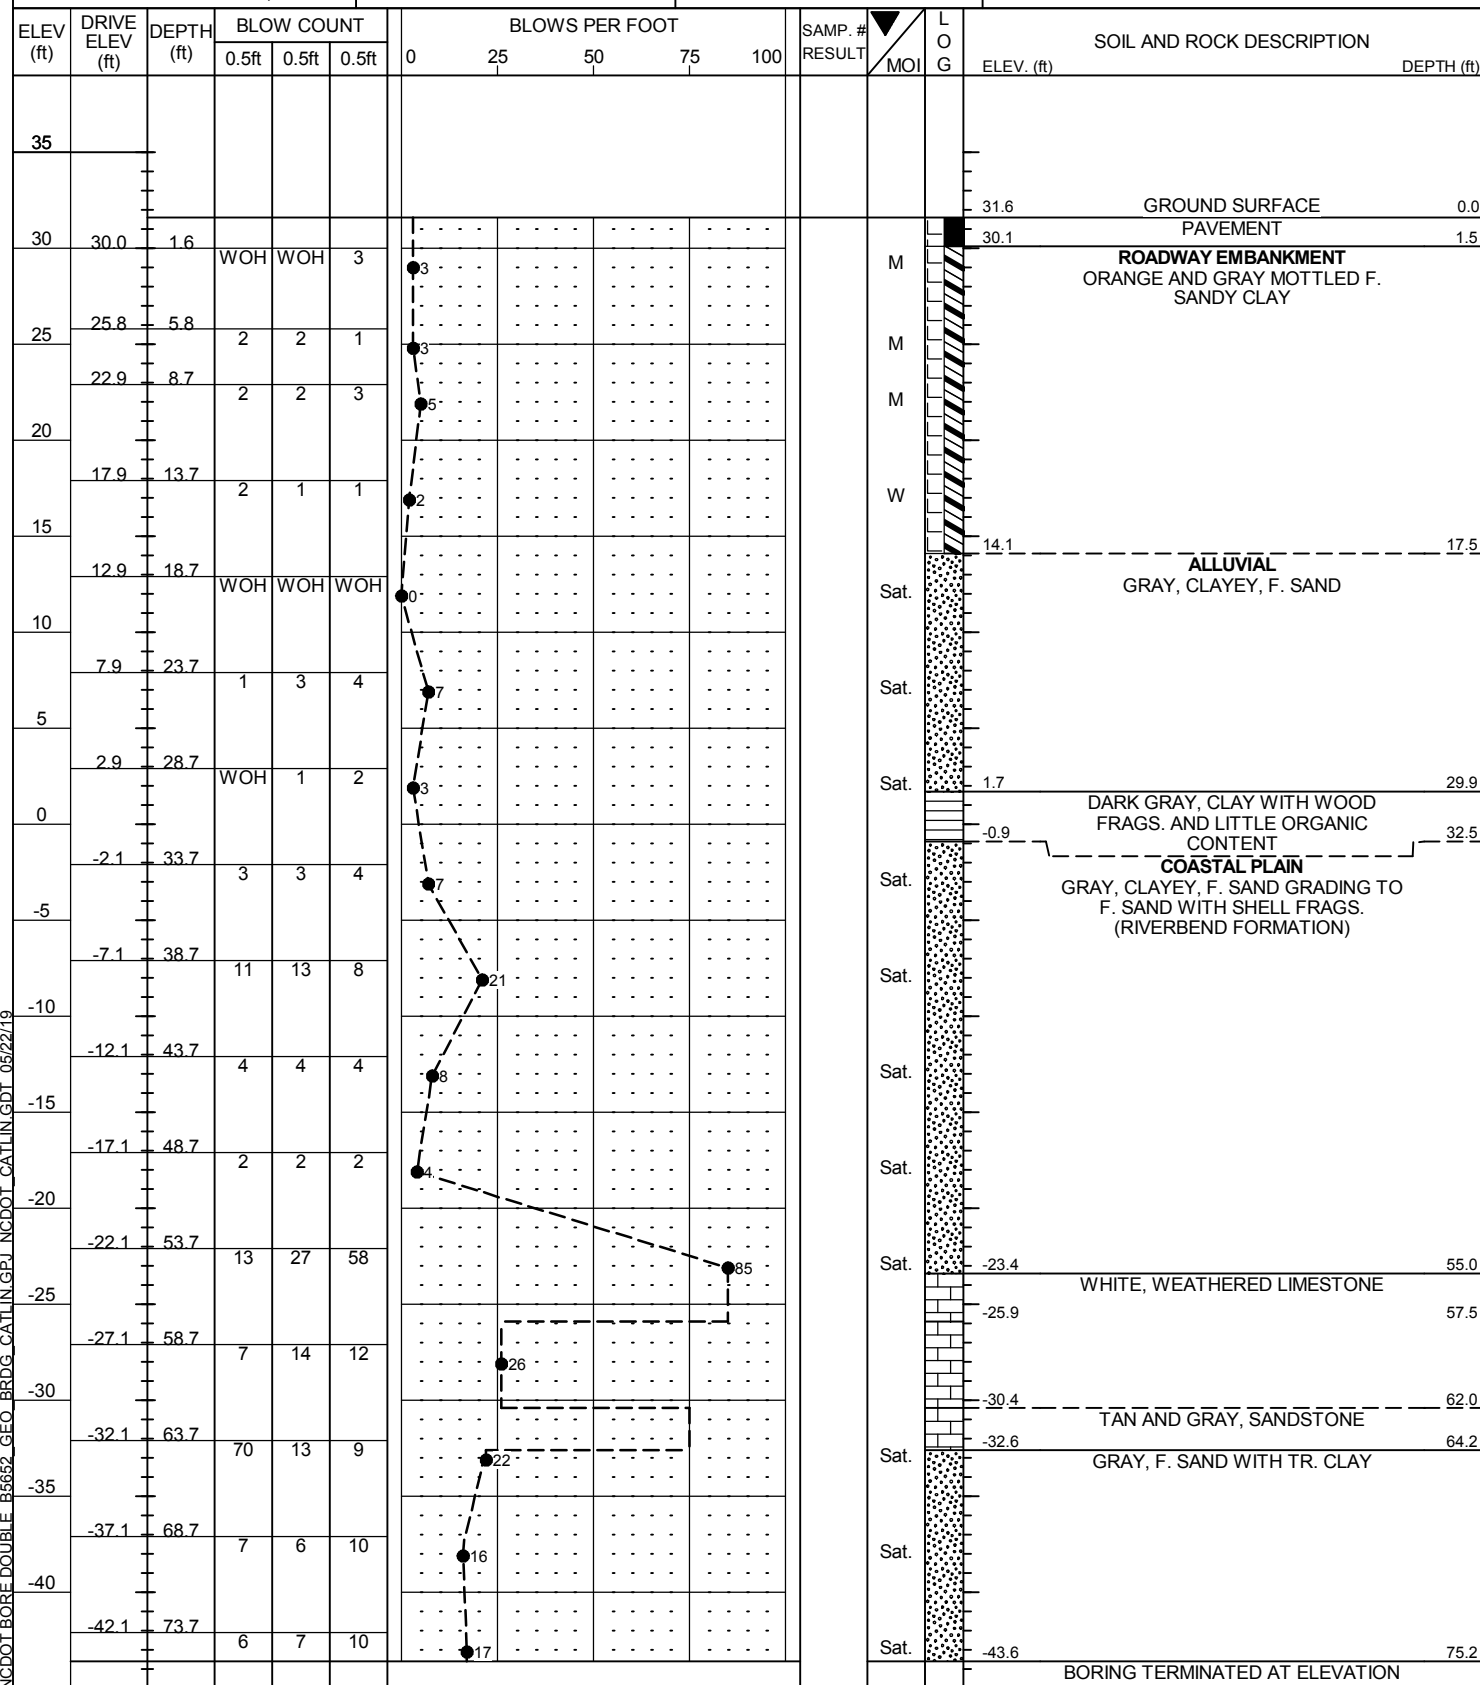

# GEOTECHNICAL BORING REPORT BORE LOG



PROJECT REFERENCE NO.

B-5652

SHEET

7

<b>WBS:</b> 45607.1.1		<b>TIP:</b> B-5652		<b>COUNTY:</b> ONSLOW		<b>GEOLOGIST:</b> K. SWAIN	
<b>SITE DESCRIPTION:</b> Bridge No. 33 on US 17 NBL over Wolf Swamp at -L_RT- Sta. 20+64							<b>GROUND WTR (ft)</b>
<b>BORING NO.:</b> EB2-B		<b>STATION:</b> 21+15		<b>OFFSET:</b> 8 ft RT		<b>ALIGNMENT:</b> -L_RT-	
<b>COLLAR ELEV.:</b> 31.5 ft		<b>TOTAL DEPTH:</b> 80.3 ft		<b>NORTHING:</b> 385,430		<b>EASTING:</b> 2,491,151	
<b>DRILL RIG/HAMMER EFF./DATE:</b> CAT1314 CME-45B 94% 09/26/2018			<b>DRILL METHOD:</b> Mud Rotary			<b>HAMMER TYPE:</b> AUTOMATIC	
<b>DRILLER:</b> D.T. Chalmers, Jr.		<b>START DATE:</b> 05/06/19		<b>COMP. DATE:</b> 05/06/19		<b>SURFACE WATER DEPTH:</b> N/A	

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. # RESULT	MOI	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
35																
															31.5	GROUND SURFACE
															29.5	PAVEMENT
	29.5	2.0													29.5	ROADWAY EMBANKMENT
															28.5	BROWN CLAY
															27.3	BROWN, CLAYEY SAND
															24.5	BROWN, CLAY
															21.7	GRAY, SANDY SILT
															15.0	BROWN, CLAY AND SANDY CLAY
															9.5	ALLUVIAL GREEN, SILTY CLAY
															4.5	GRAY, F. SAND
															-0.5	COASTAL PLAIN GRAY AND GREEN, F. SAND (RIVERBEND FORMATION)
															-10.0	GREEN AND GRAY, CLAYEY AND SILTY, F. SAND
															-20.5	GRAY, F. SAND
															-25.5	WHITE WEATHERED LIMESTONE
															-31.0	GRAY, CLAYEY AND SILTY F. SAND
															-37.3	
															-42.3	

<b>WBS:</b> 45607.1.1		<b>TIP:</b> B-5652		<b>COUNTY:</b> ONSLOW		<b>GEOLOGIST:</b> K. SWAIN	
<b>SITE DESCRIPTION:</b> Bridge No. 33 on US 17 NBL over Wolf Swamp at -L_RT- Sta. 20+64							<b>GROUND WTR (ft)</b>
<b>BORING NO.:</b> EB2-B		<b>STATION:</b> 21+15		<b>OFFSET:</b> 8 ft RT		<b>ALIGNMENT:</b> -L_RT-	
<b>COLLAR ELEV.:</b> 31.5 ft		<b>TOTAL DEPTH:</b> 80.3 ft		<b>NORTHING:</b> 385,430		<b>EASTING:</b> 2,491,151	
<b>DRILL RIG/HAMMER EFF./DATE:</b> CAT1314 CME-45B 94% 09/26/2018			<b>DRILL METHOD:</b> Mud Rotary			<b>HAMMER TYPE:</b> AUTOMATIC	
<b>DRILLER:</b> D.T. Chalmers, Jr.		<b>START DATE:</b> 05/06/19		<b>COMP. DATE:</b> 05/06/19		<b>SURFACE WATER DEPTH:</b> N/A	

ELEV (ft)	DRIVE ELEV (ft)	DEPTH (ft)	BLOW COUNT			BLOWS PER FOOT					SAMP. # RESULT	MOI	LOG	SOIL AND ROCK DESCRIPTION	DEPTH (ft)	
			0.5ft	0.5ft	0.5ft	0	25	50	75	100						
															-45	Match Line
															-47.3	
															-48.8	GRAY, CLAYEY AND SILTY F. SAND (continued)
															-48.8	BORING TERMINATED AT ELEVATION -48.8 ft IN MEDIUM DENSE CLAYEY SAND. RIVERBEND FORMATION



NC DOT BORE DOUBLE B5652 GEO BRDG CATLIN.GPI.NC DOT CATLIN.GDI 05/22/19



# GEOTECHNICAL BORING REPORT BORE LOG

<b>WBS:</b> 45607.1.1	<b>TIP:</b> B-5652	<b>COUNTY:</b> ONSLOW	<b>GEOLOGIST:</b> J. HOLLAND
<b>SITE DESCRIPTION:</b> Bridge No. 33 Detour on -L_DET- over Wolf Swamp at -LDET- Sta. 19+22			<b>GROUND WTR (ft)</b>
<b>BORING NO.:</b> EB1-B_DET	<b>STATION:</b> 18+85	<b>OFFSET:</b> 2 ft RT	<b>ALIGNMENT:</b> -L_DET-
<b>COLLAR ELEV.:</b> 16.6 ft	<b>TOTAL DEPTH:</b> 74.5 ft	<b>NORTHING:</b> 385,332	<b>EASTING:</b> 2,491,113
<b>DRILL RIG/HAMMER EFF./DATE:</b> CAT4425 CME-55 87% 01/16/2019		<b>DRILL METHOD:</b> Mud Rotary	<b>HAMMER TYPE:</b> AUTOMATIC
<b>DRILLER:</b> Jordan Edmondson	<b>START DATE:</b> 05/02/19	<b>COMP. DATE:</b> 05/02/19	<b>SURFACE WATER DEPTH:</b> N/A

<b>WBS:</b> 45607.1.1	<b>TIP:</b> B-5652	<b>COUNTY:</b> ONSLOW	<b>GEOLOGIST:</b> J. HOLLAND
<b>SITE DESCRIPTION:</b> Bridge No. 33 Detour on -L_DET- over Wolf Swamp at -LDET- Sta. 19+22			<b>GROUND WTR (ft)</b>
<b>BORING NO.:</b> EB1-B_DET	<b>STATION:</b> 18+85	<b>OFFSET:</b> 2 ft RT	<b>ALIGNMENT:</b> -L_DET-
<b>COLLAR ELEV.:</b> 16.6 ft	<b>TOTAL DEPTH:</b> 74.5 ft	<b>NORTHING:</b> 385,332	<b>EASTING:</b> 2,491,113
<b>DRILL RIG/HAMMER EFF./DATE:</b> CAT4425 CME-55 87% 01/16/2019		<b>DRILL METHOD:</b> Mud Rotary	<b>HAMMER TYPE:</b> AUTOMATIC
<b>DRILLER:</b> Jordan Edmondson	<b>START DATE:</b> 05/02/19	<b>COMP. DATE:</b> 05/02/19	<b>SURFACE WATER DEPTH:</b> N/A

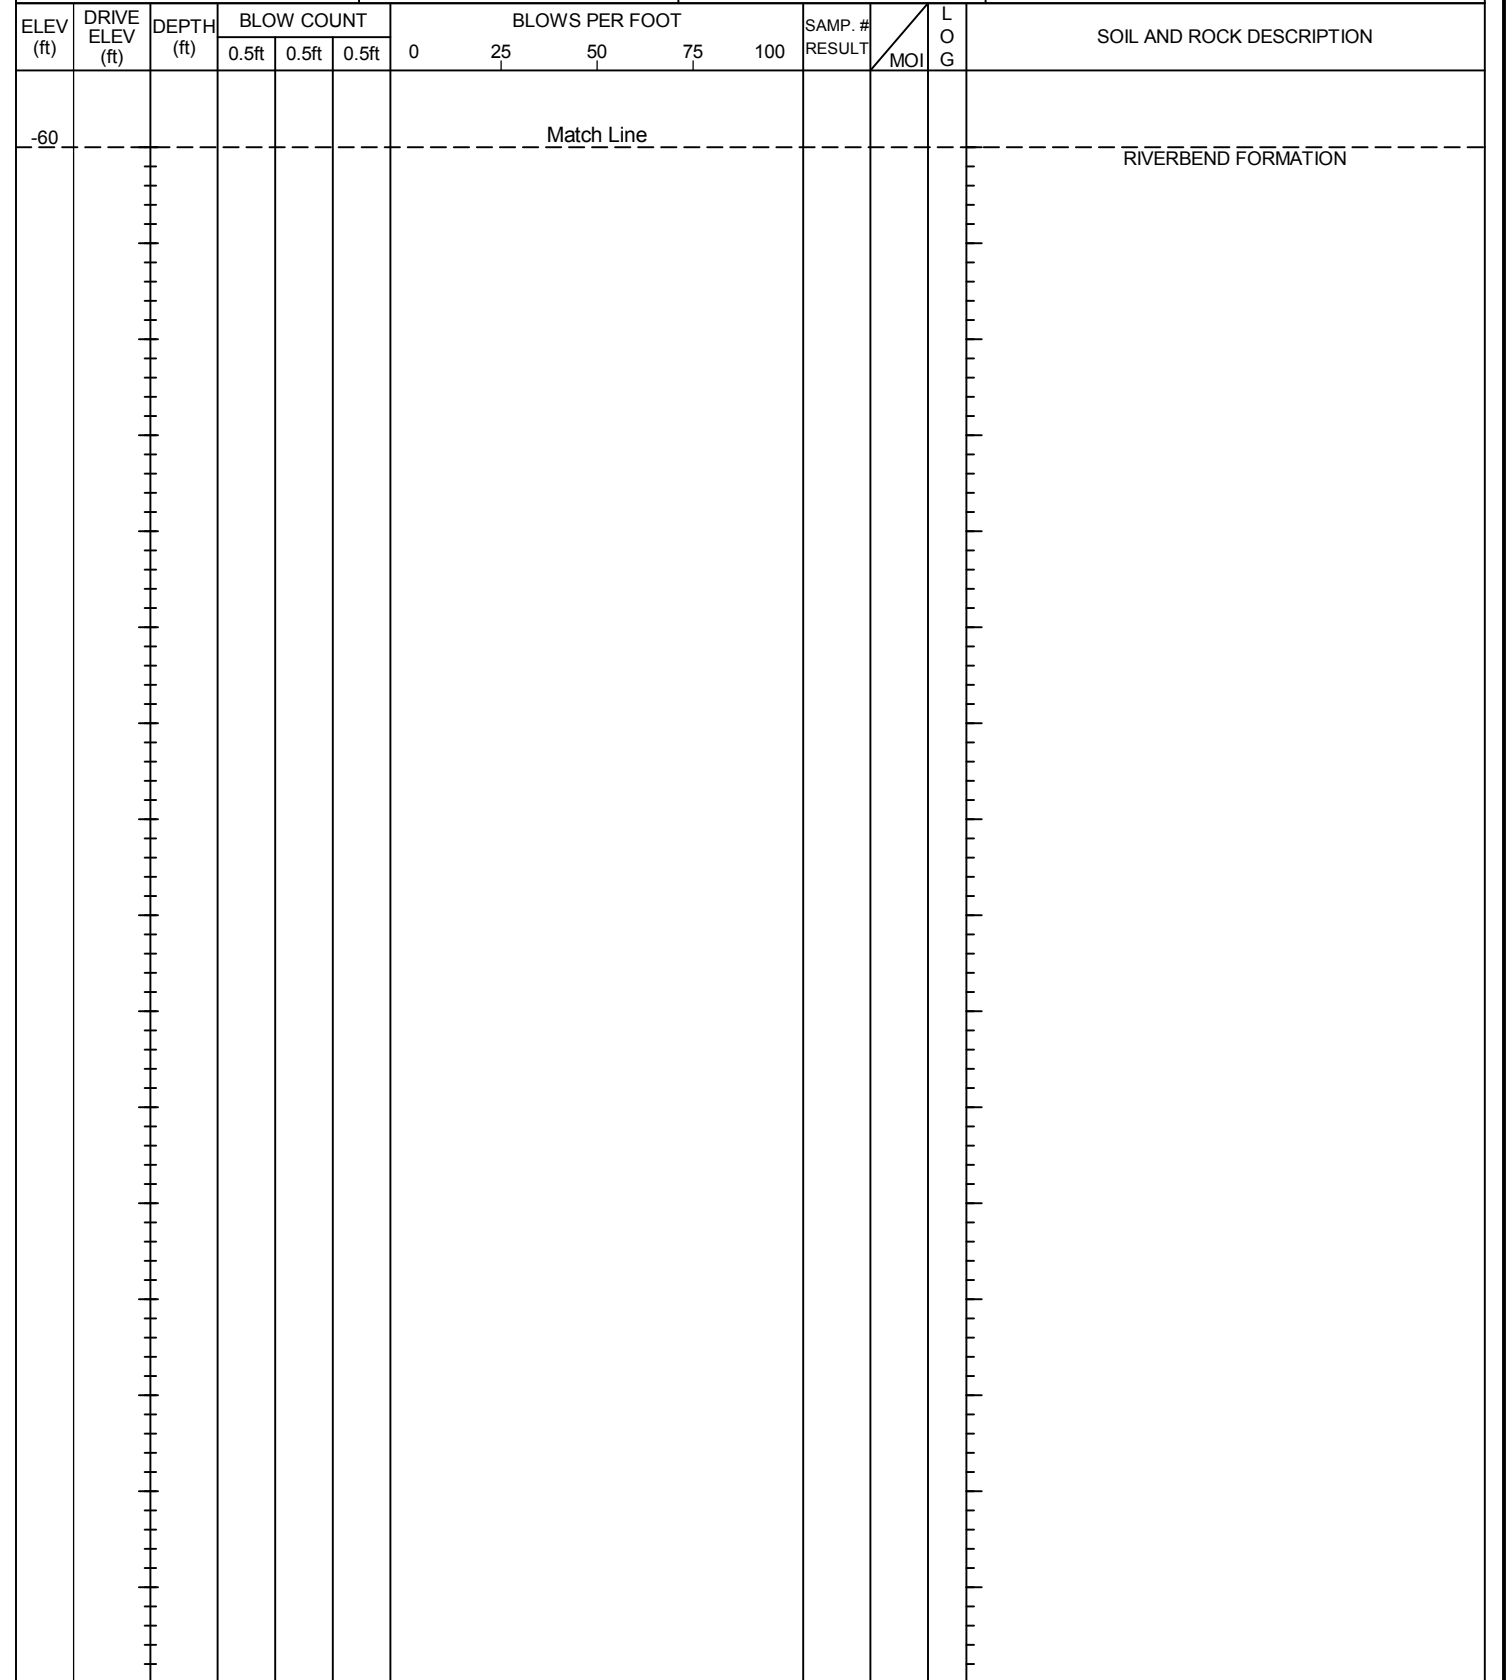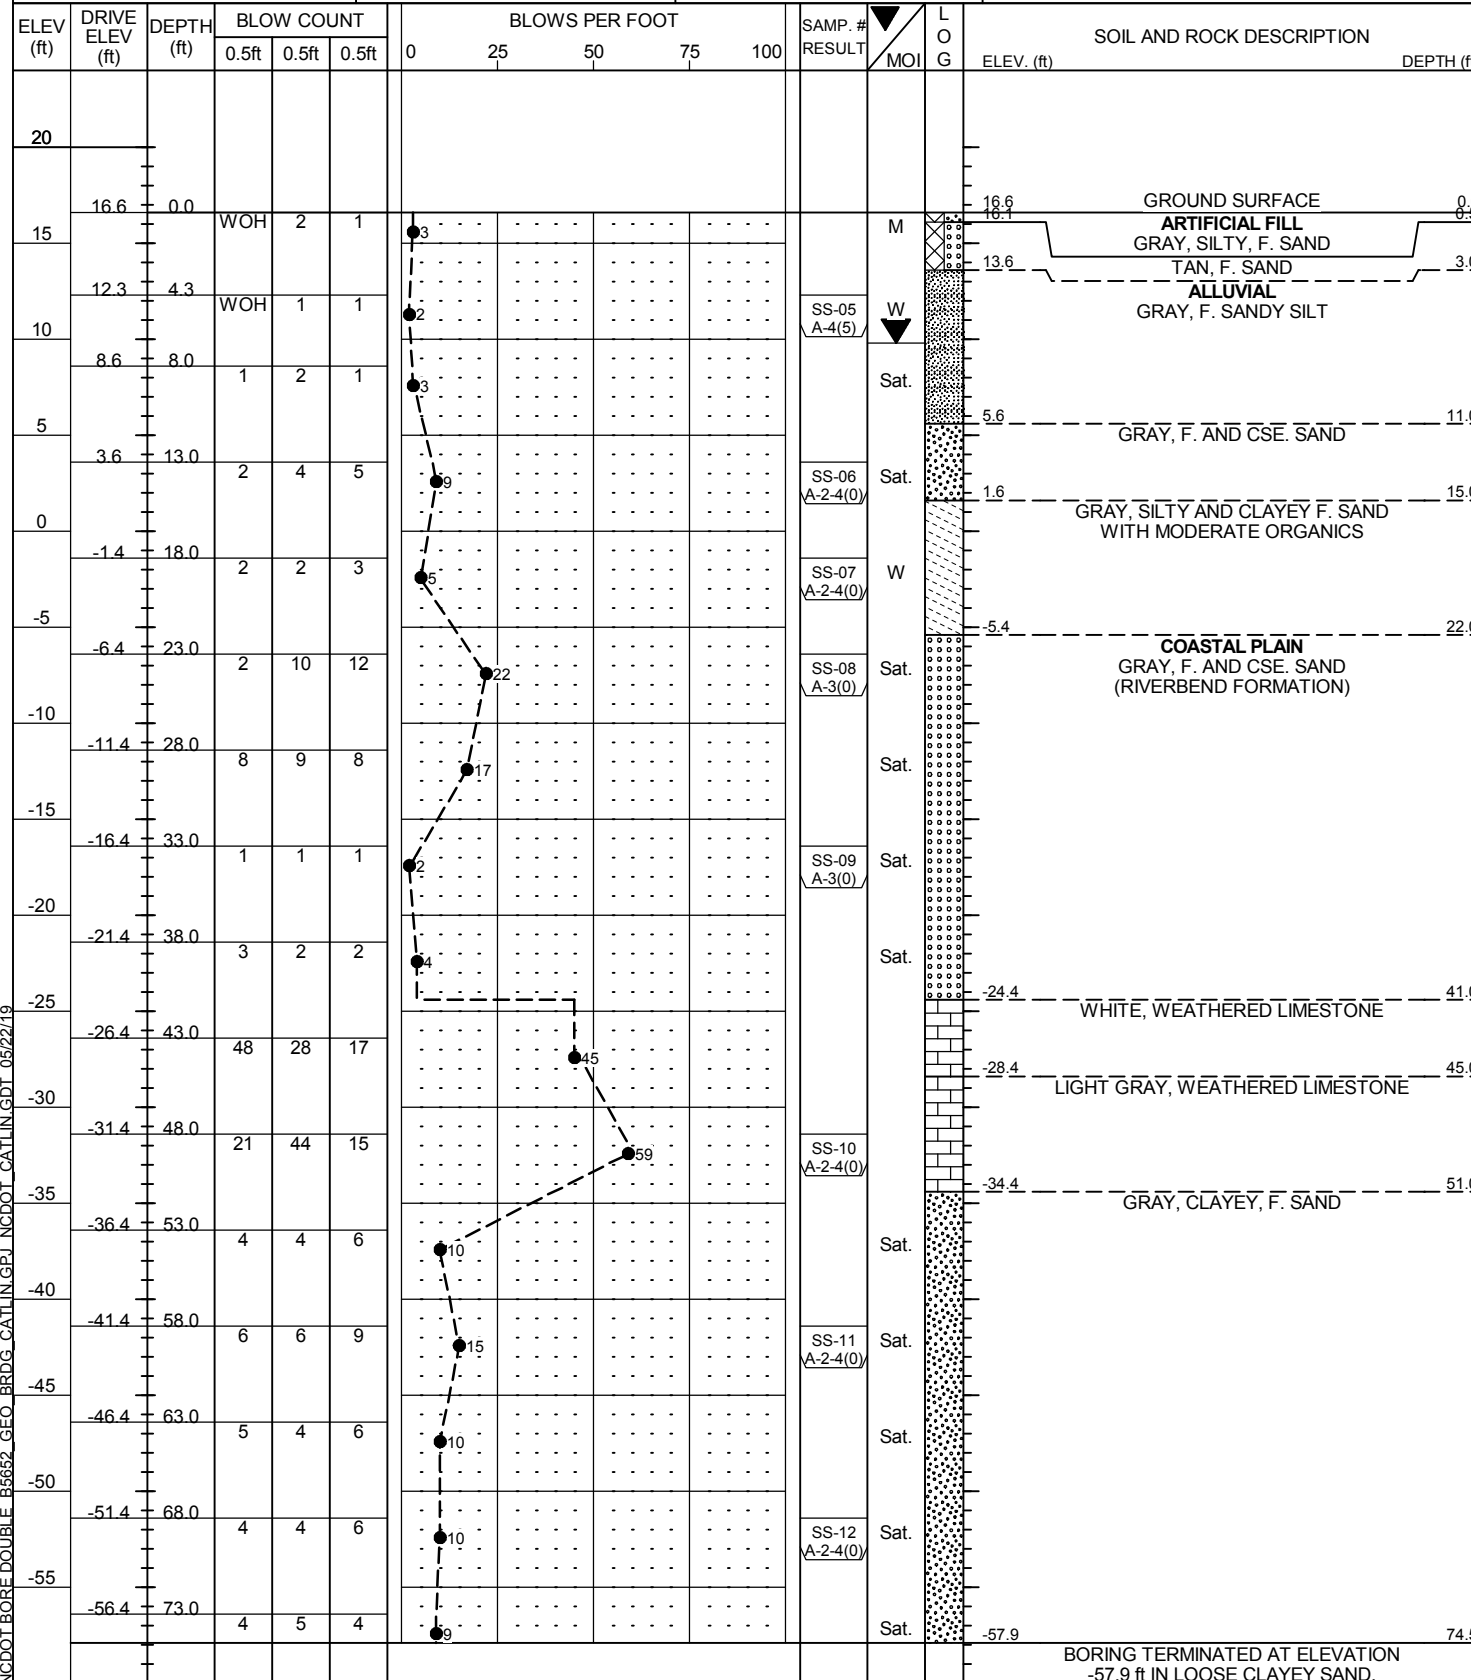

NCDOT BORE DOUBLE B5652 GEO BRDG CATLIN.GPI NCDOT CATLIN.GDI 05/22/19



# LABORATORY SUMMARY SHEET

## AASHTO Standard Specifications

(As modified by NCDOT, Material and Tests Unit, 2000.)

### TEST RESULTS

Proj. Sample Number	SS-05	SS-06	SS-07	SS-08	SS-09	SS-10	SS-11	SS-12	SS-01	SS-02	SS-03	SS-04		
Lab Sample Number	SS-05	SS-06	SS-07	SS-08	SS-09	SS-10	SS-11	SS-12	SS-01	SS-02	SS-03	SS-04		
Retained #4 Sieve %	0	0	7.2	0	0	3.7	0	0	0	0.2	3.9	0		
Passing #10 Sieve %	100	100	85.0	99.9	100	92.4	100	100	99.9	99.6	90.5	100		
Passing #40 Sieve %	100	86	96	89	98	98	100	100	98	98	89	100		
Passing #200 Sieve %	73	12	34	10	4	22	13	18	66	65	7	10		
<b>MINUS NUMBER 10 FRACTION</b>														
<b>SOIL MORTAR - 100%</b>														
Coarse Sand Ret.-#60 %	1.0	38.2	7.0	40.4	41.6	5.5	1.6	6.0	5.9	3.3	33.6	1.3		
Fine Sand Ret.-#270 %	29.6	52.3	67.7	52.3	54.3	74.2	86.6	78.0	32.5	37.1	61.3	89.4		
Silt 0.05 - 0.005mm %	59.4	4.5	14.0	2.3	0.1	9.2	4.7	4.9	32.8	26.6	3.9	4.3		
Clay <0.005mm %	10.1	5.0	11.2	5.0	4.0	11.1	7.0	11.1	28.8	33.0	1.2	5.0		
Liquid Limit (LL)	24	NP	NP	NP	NP	NP	NP	NP	33	49	NP	NP		
Plasticity Index (PI)	10	NP	NP	NP	NP	NP	NP	NP	17	34	NP	NP		
AASHTO Classification /Group Index	<b>A-4(5)</b>	<b>A-2-4(0)</b>	<b>A-2-4(0)</b>	<b>A-3(0)</b>	<b>A-3(0)</b>	<b>A-2-4(0)</b>	<b>A-2-4(0)</b>	<b>A-2-4(0)</b>	<b>A-6(9)</b>	<b>A-7-6(19)</b>	<b>A-3(0)</b>	<b>A-2-4(0)</b>		
Organic Content %	N/A	N/A	5.7	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A		
Station	18+85	18+85	18+85	18+85	18+85	18+85	18+85	18+85	19+62	19+62	19+62	19+62		
Offset	2ft RT	2ft RT	2ft RT	2ft RT	2ft RT	2ft RT	2ft RT	2ft RT	4ft RT	4ft RT	4ft RT	4ft RT		
Alignment	-L_DET-	-L_DET-	-L_DET-	-L_DET-	-L_DET-	-L_DET-	-L_DET-	-L_DET-	-L_DET-	-L_DET-	-L_DET-	-L_DET-		
Boring Identification	EB1-B_DET	EB1-B_DET	EB1-B_DET	EB1-B_DET	EB1-B_DET	EB1-B_DET	EB1-B_DET	EB1-B_DET	EB2-B_DET	EB2-B_DET	EB2-B_DET	EB2-B_DET		
Depth (FT)	4.3	13.0	18.0	23.0	33.0	48.0	58.0	68.0	1.0	4.6	28.5	53.5		
to	5.8	14.5	19.5	24.5	34.5	49.5	59.5	69.5	1.5	6.1	30.0	55.0		
Field Moist. Content %														
Tested By	MDM	MDM	MDM	MDM	MDM	MDM	MDM	MDM	MDM	MDM	MDM	MDM		
Submitted By	J. HOLLAND	J. HOLLAND	J. HOLLAND	J. HOLLAND	J. HOLLAND	J. HOLLAND	J. HOLLAND	J. HOLLAND	J. HOLLAND	J. HOLLAND	J. HOLLAND	J. HOLLAND		
Date Submitted	05/02/19	05/02/19	05/02/19	05/02/19	05/02/19	05/02/19	05/02/19	05/02/19	05/02/19	05/02/19	05/02/19	05/02/19		

NP = Non-Plastic

NEM = Not Enough Material for Analysis

N/A = Not Applicable / Not Analyzed

  
Laboratory Manager


Report Date: 04/16/2019

Laboratory Report Page 1 of 1

# SITE PHOTOGRAPHS



HIGHWAY 17 NORTH BOUND LANE  
FACING EAST

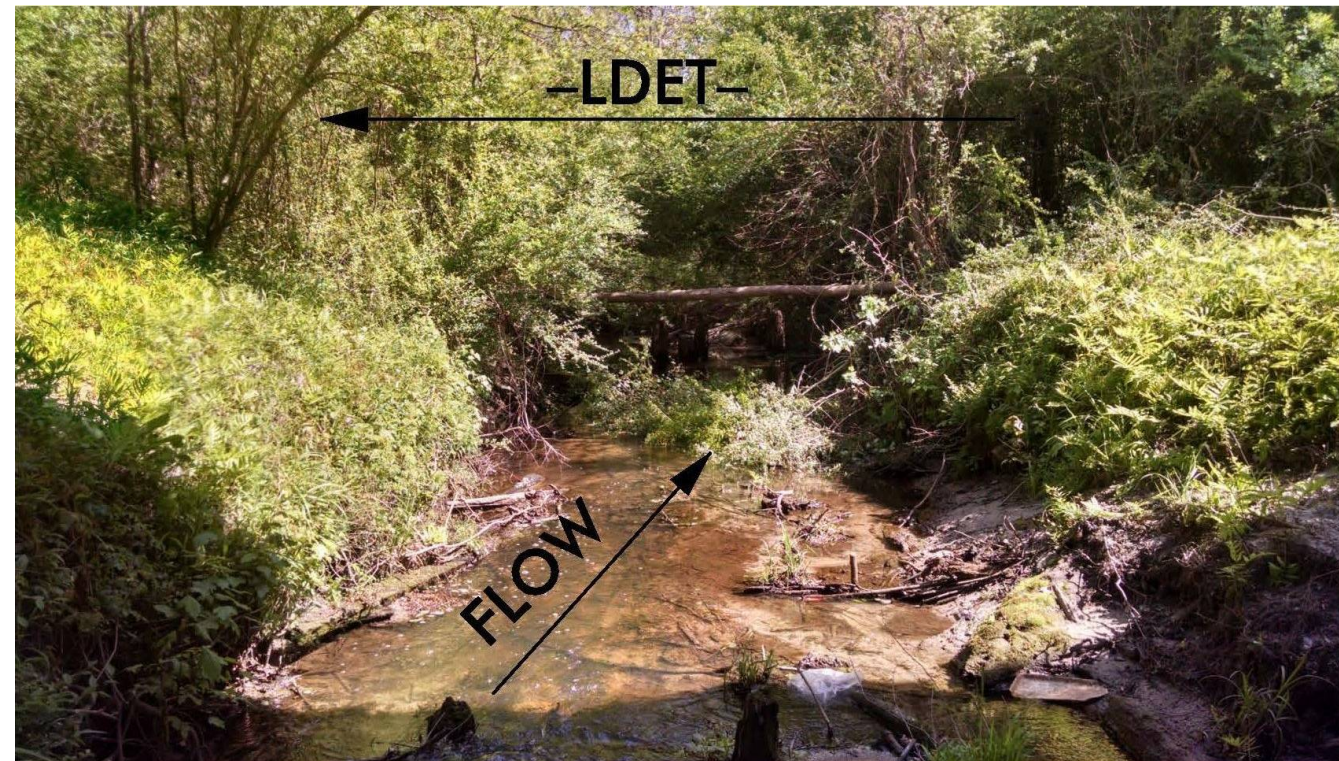

PROPOSED DETOUR BRIDGE LOCATION  
FACING EAST