



-L- STA. 18+04.80 TO 19+45.76 (BEGIN APPROACH SLAB)
 -L- STA. 21+82.93 (END APPROACH SLAB) TO 25+94.00

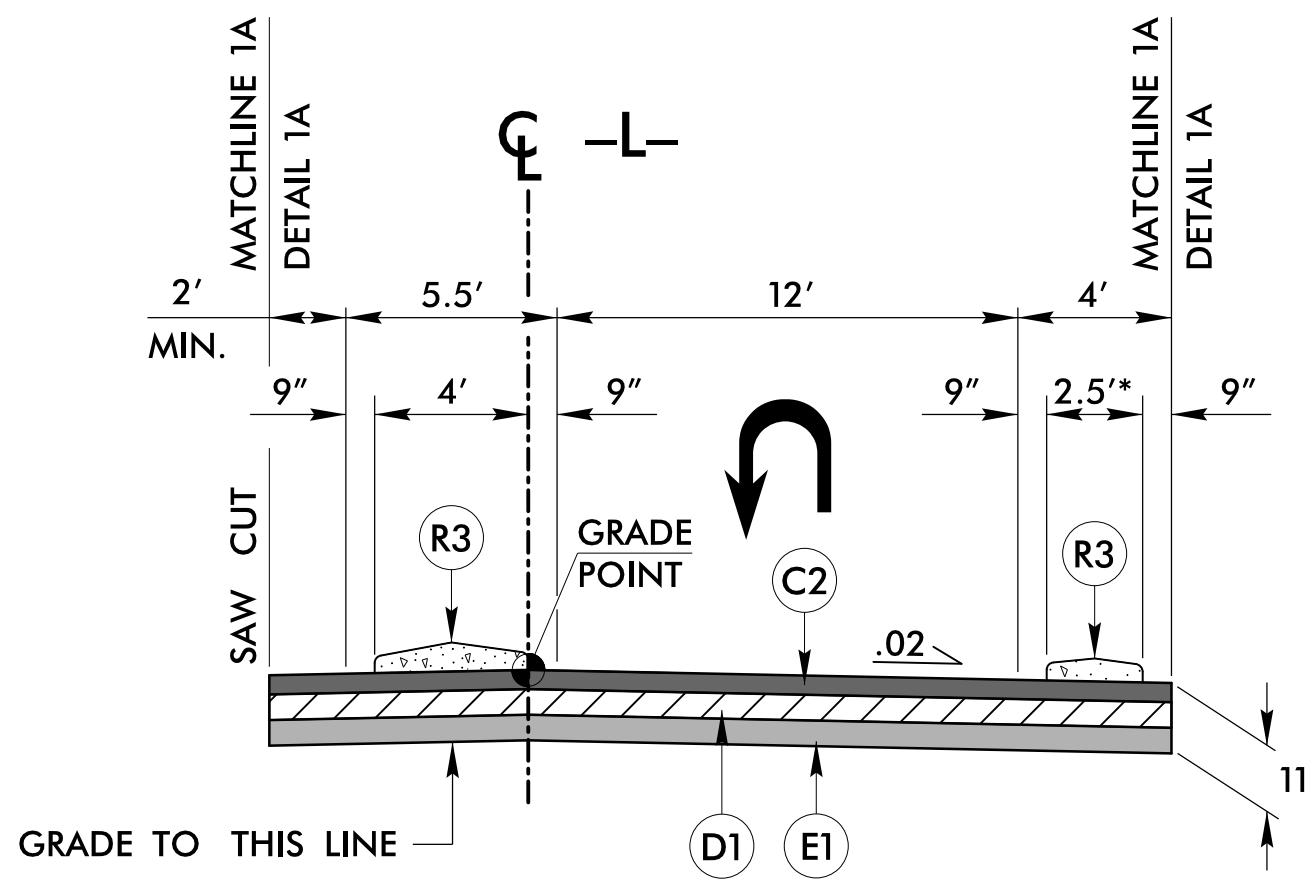

DETAIL A
 -L- STA. 23+46.00 TO 25+94.00


*NOTE: SEE PLAN SHEET 6 FOR CONCRETE ISLAND (R3) AT U-TURN BULB

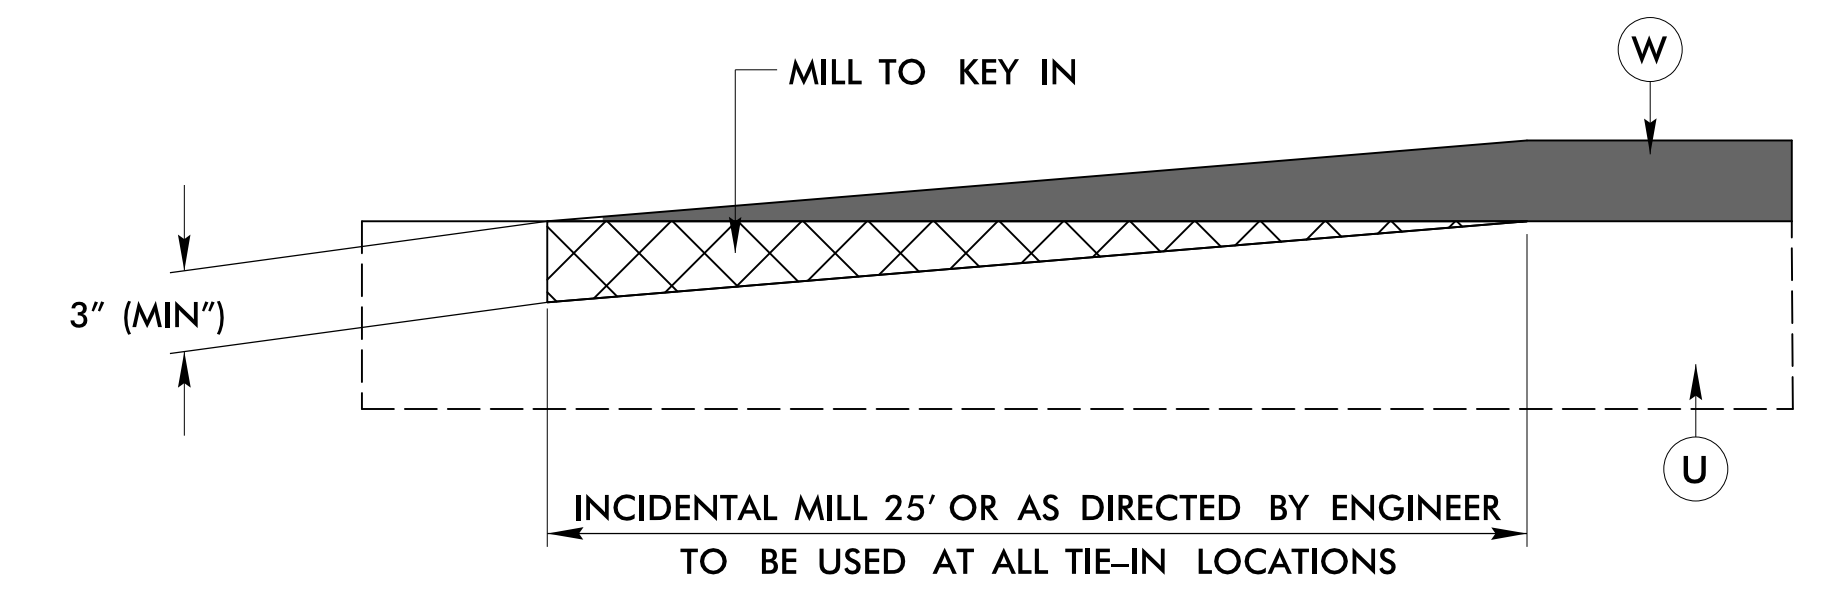


INCIDENTAL MILLING DETAIL B
 -L- STA. 16+55.00 TO 16+80.00
 -L- STA. 17+35.00 TO 17+97.00, OFFSET 89' ± LT
 -L- STA. 17+49.00 TO 18+12.00, OFFSET 85' ± RT
 -L- STA. 25+69.00 TO 25+94.00

FINAL PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 1.0" IN DEPTH OR GREATER THAN 1.5" IN DEPTH.
D1	PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
D2	PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 2.5" IN DEPTH OR GREATER THAN 4" IN DEPTH.
E1	PROP. APPROX. 4.0" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E2	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH. TO BE PLACED IN LAYERS NOT LESS THAN 3.0" IN DEPTH OR GREATER THAN 5.5" IN DEPTH.
R1	2'-6" CURB & GUTTER
R2	5" MONOLITHIC CONCRETE ISLAND (KEYED IN)
R3	5" MONOLITHIC CONCRETE ISLAND (SURFACE MOUNTED)
R4	PORTABLE CONCRETE BARRIER
S	4" CONCRETE SIDEWALK
T	EARTH MATERIAL
U	EXISTING PAVEMENT
V	MILLING 1.5" IN DEPTH
W	WEDGING (SEE WEDGING DETAIL, SHEET 2A-1)

ALL PAVEMENT SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE.

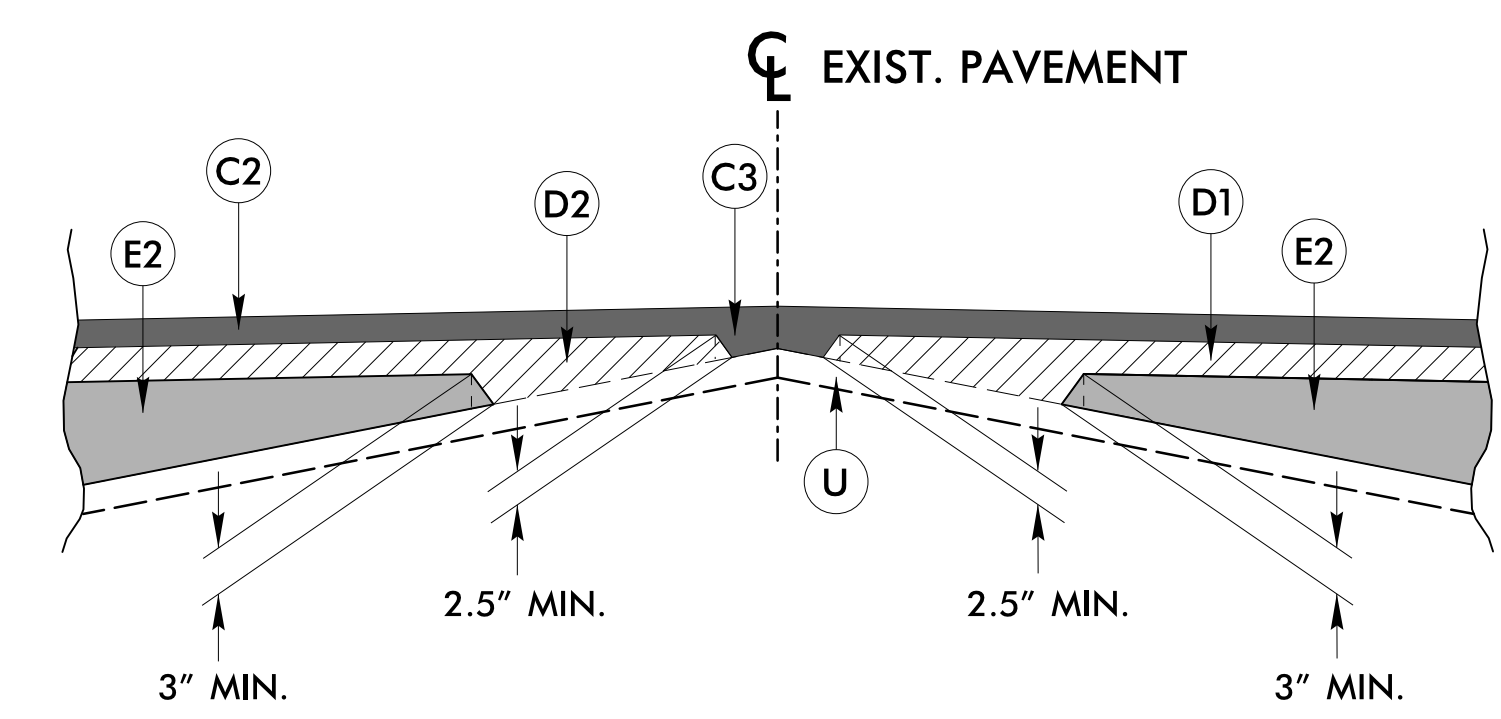

WEDGING DETAIL C

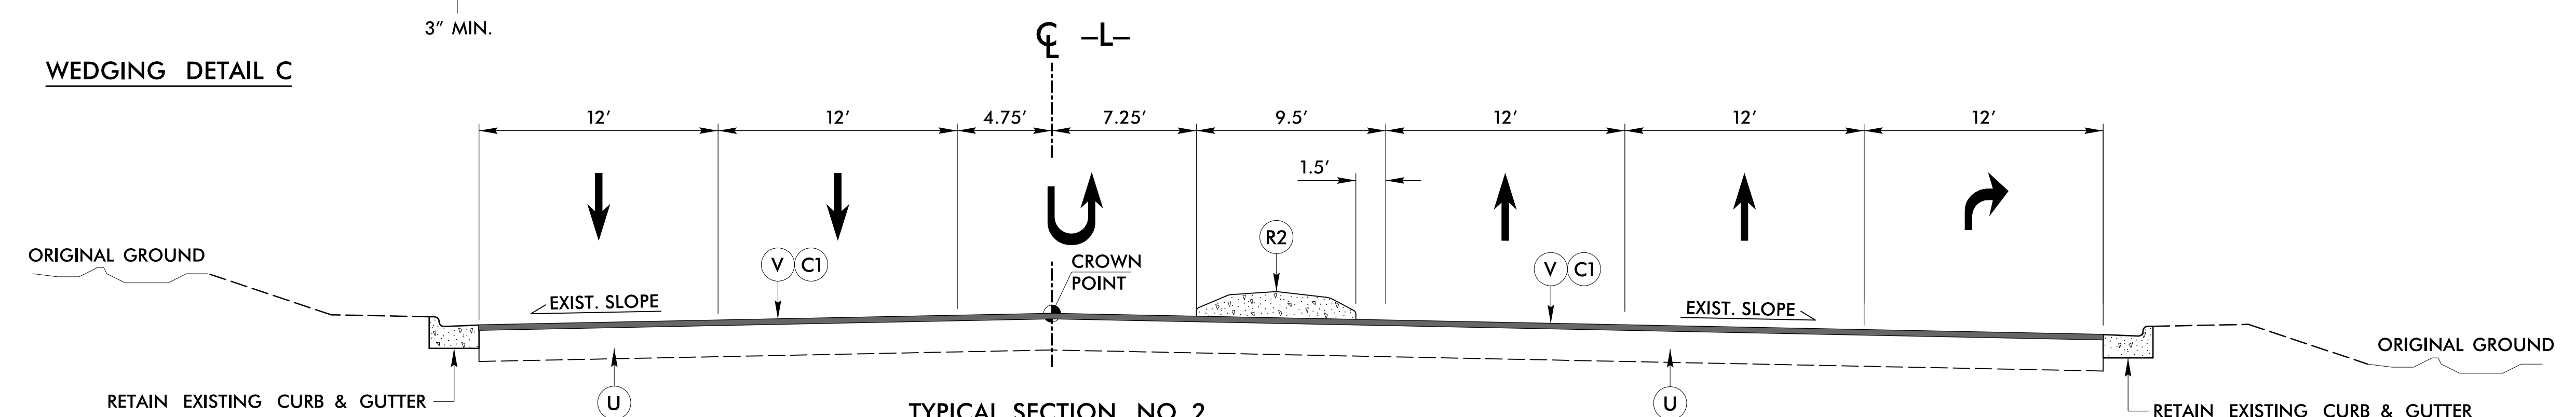

TYPICAL SECTION NO. 2
 -L- STA. 16+55.00 TO 18+04.80
 INCLUDES TIE-INS AT POPLAR TENT ROAD AND MCGILL AVENUE