

**NOTES:**

FOR MECHANICALLY STABILIZED EARTH (MSE) RETAINING WALLS, SEE MECHANICALLY STABILIZED EARTH RETAINING WALLS PROVISION.  
 FOR TYPE III REINFORCED BRIDGE APPROACH FILL, SEE BRIDGE APPROACH FILLS PROVISION AND ROADWAY DETAIL DRAWING NO. 422D10.  
 FOR SINGLE FACED PRECAST CONCRETE BARRIER, SEE ROADWAY PLANS AND SECTION 857 OF THE STANDARD SPECIFICATIONS.  
 A SEPARATION GEOTEXTILE IS REQUIRED AT THE BACK OF THE REINFORCED ZONE FOR RETAINING WALLS AT END BENT NO.1 AND END BENT NO.2  
 A DRAIN IS REQUIRED FOR RETAINING WALLS AT END BENT NO.1 AND END BENT NO.2.  
 BEFORE BEGINNING MSE WALL DESIGN FOR RETAINING WALLS AT END BENT NO.1 AND END BENT NO.2, SURVEY WALL LOCATION AND SUBMIT A REVISED WALL PROFILE VIEW (WALL ENVELOPE) FOR REVIEW. DO NOT START WALL DESIGN OR CONSTRUCTION UNTIL THE REVISED WALL ENVELOPE IS ACCEPTED.

DESIGN RETAINING WALL AT END BENT NO.1 FOR THE FOLLOWING:  
 1) H = DESIGN HEIGHT + EMBEDMENT  
 2) DESIGN LIFE = 75 YEARS  
 3) MAXIMUM FACTORED VERTICAL PRESSURE ON FOUNDATION MATERIAL = 6,000 PSF  
 4) MINIMUM REINFORCEMENT LENGTH (L) = 0.7H OR 6 FT, WHICHEVER IS LONGER  
 5) REINFORCED ZONE AGGREGATE PARAMETERS:

AGGREGATE TYPE*	UNIT WEIGHT ( $\gamma$ ) PCF	FRICTION ANGLE ( $\phi$ ) DEGREES	COHESION (c) PSF
COARSE	110	38	0
FINE	115	34	0

\*SEE MSE RETAINING WALLS PROVISION FOR COARSE AND FINE AGGREGATE MATERIAL REQUIREMENTS.

7) IN-SITU ASSUMED MATERIAL PARAMETERS:

MATERIAL TYPE	UNIT WEIGHT ( $\gamma$ ) PCF	FRICTION ANGLE ( $\phi$ ) DEGREES	COHESION (c) PSF
BACKFILL	120	30	0
FOUNDATION	120	32	0

DESIGN RETAINING WALL AT END BENT NO.2 FOR THE FOLLOWING:  
 1) H = DESIGN HEIGHT + EMBEDMENT  
 2) DESIGN LIFE = 75 YEARS  
 3) MAXIMUM FACTORED VERTICAL PRESSURE ON FOUNDATION MATERIAL = 6,000 PSF  
 4) MINIMUM REINFORCEMENT LENGTH (L) = 0.7H OR 6 FT, WHICHEVER IS LONGER  
 5) REINFORCED ZONE AGGREGATE PARAMETERS:


AGGREGATE TYPE*	UNIT WEIGHT ( $\gamma$ ) PCF	FRICTION ANGLE ( $\phi$ ) DEGREES	COHESION (c) PSF
COARSE	110	38	0
FINE	115	34	0

\*SEE MSE RETAINING WALLS PROVISION FOR COARSE AND FINE AGGREGATE MATERIAL REQUIREMENTS.

7) IN-SITU ASSUMED MATERIAL PARAMETERS:


MATERIAL TYPE	UNIT WEIGHT ( $\gamma$ ) PCF	FRICTION ANGLE ( $\phi$ ) DEGREES	COHESION (c) PSF
BACKFILL	120	30	0
FOUNDATION	120	32	0

DESIGN RETAINING WALLS AT END BENT NO.1 AND END BENT NO.2 FOR A LIVE LOAD (TRAFFIC) SURCHARGE.  
 EXISTING OR FUTURE OBSTRUCTIONS SUCH AS FOUNDATIONS, GUARDRAIL, FENCE OR HANDRAIL POSTS, PAVEMENTS, PIPES, INLETS OR UTILITIES WILL INTERFERE WITH REINFORCEMENT FOR RETAINING WALLS AT END BENT NO.1 AND END BENT NO.2.  
 FOUNDATIONS FOR END BENT NO.1 AND END BENT NO.2 WILL INTERFERE WITH REINFORCEMENT FOR RETAINING WALLS AT END BENT NO.1 AND END BENT NO.2. SEE "FOUNDATION LAYOUT" SHEET FOR FOUNDATION LOCATIONS.  
 MSE WALL CONSTRUCTION SEQUENCE WILL REQUIRE A COORDINATION WITH PILE INSTALLATION AT END BENT NO.1 AND END BENT NO.2. AFTER EXCAVATING WALL AREA TO BOTTOM OF WALL SUBGRADED ELEVATION, PILES SHALL BE DRIVEN TO THE REQUIRED DRIVING RESISTANCE.  
 DO NOT PLACE LEVELING PAD CONCRETE, AGGREGATE OR REINFORCEMENT FOR RETAINING WALLS AT END BENT 1 AND END BENT NO.2 UNTIL EXCAVATION DIMENSIONS AND FOUNDATION MATERIAL ARE APPROVED.

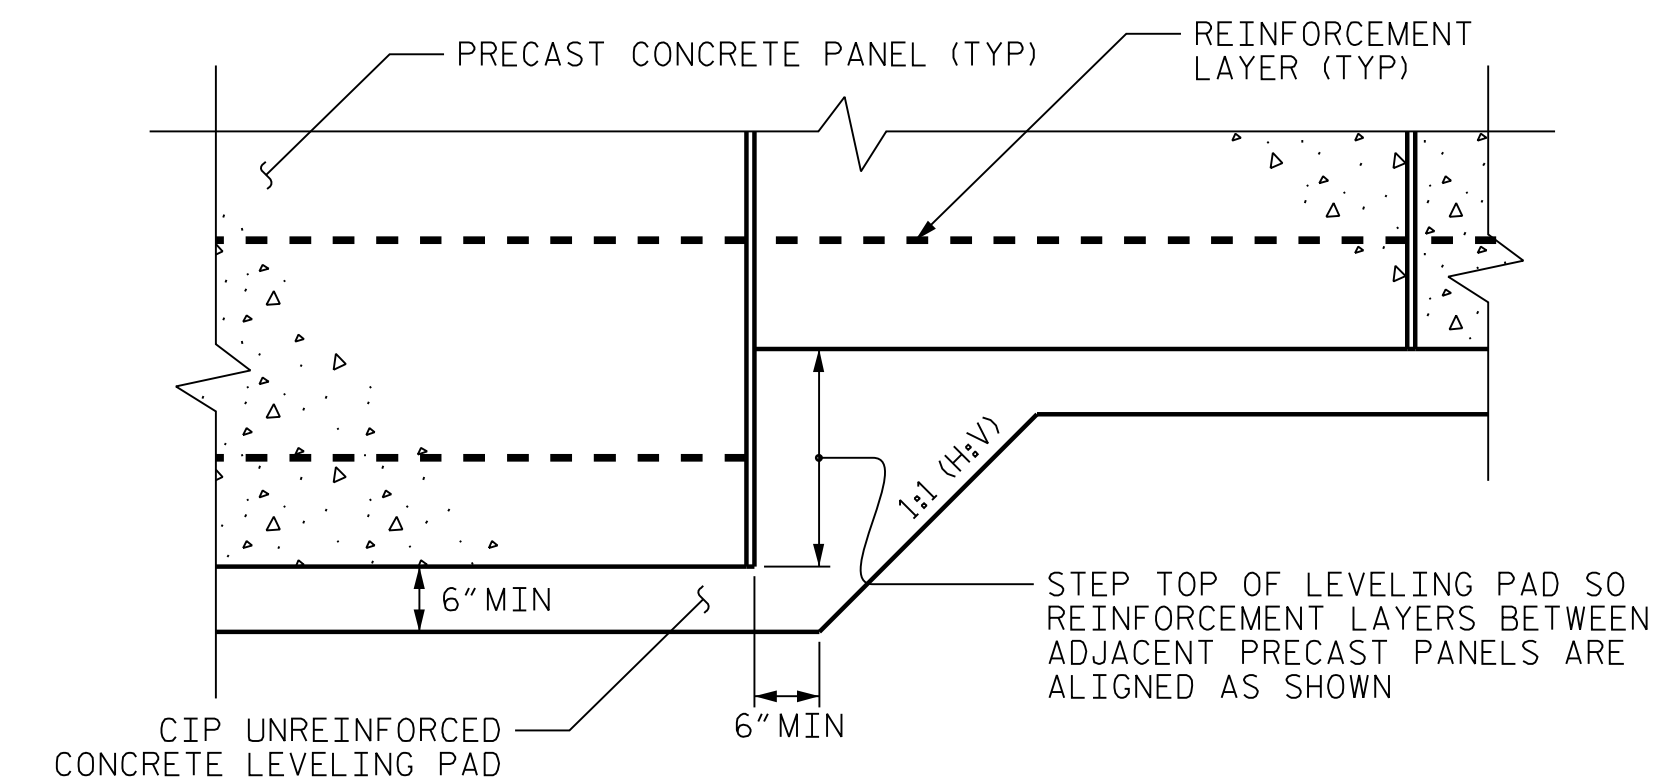

**PRECAST PANELS  
LEVELING PAD STEP DETAIL**

PROJECT NO. BP7.R006.3  
GUILFORD COUNTY  
 STATION: 18+82.09 -L-  
 SHEET 5 OF 5

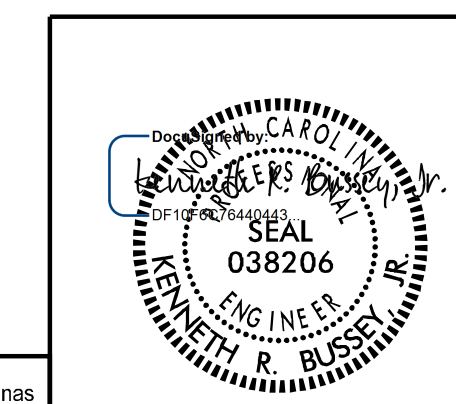

STATE OF NORTH CAROLINA  
 DEPARTMENT OF TRANSPORTATION  
 RALEIGH  
 MSE RETAINING WALLS  
 MSE WALL - NOTES  
 & PRECAST PANELS  
 LEVELING PAD  
 STEP DETAIL

**HDR** HDR Engineering, Inc. of the Carolinas  
 555 Fayetteville St. Suite 900 Raleigh, N.C. 27601  
 N.C.B.E.L.S. License Number: F-0116

1/27/2023 | 10:24 AM

REVISIONS

NO.	BY:	DATE:	NO.	BY:	DATE:	SHEET NO.
1			3			W-5
2			4			TOTAL SHEETS 5

**DOCUMENT NOT CONSIDERED FINAL  
UNLESS ALL SIGNATURES COMPLETED**

1/19/2023 9:13:51 AM ... \400225\_MSE\_Details-W5.dgn

DRAWN BY: <u>T. LYNN</u>	DATE: <u>2-22</u>
CHECKED BY: <u>K. BUSSEY</u>	DATE: <u>2-22</u>
DESIGN ENGINEER OF RECORD: <u>K. BUSSEY</u>	DATE: <u>2-22</u>