

PAVEMENT SCHEDULE FINAL PAVEMENT DESIGN		U	EXISTING PAVEMENT
C1	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD.	V1	1½" MILLING
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 168 LBS. PER SQ. YD. IN EACH OF TWO LAYERS	V2	INCIDENTAL MILLING
СЗ	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5C, AT AN AVERAGE RATE OF 112 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN $1\frac{1}{2}$ " IN DEPTH OR GREATER THAN 2" IN DEPTH	W1	VARIABLE DEPTH ASPHALT PAVEMENT (SEE DETAIL SHOWING METHOD OF WEDGING NO. 1)
C4	PROP. APPROX. 1½" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.	W2	VARIABLE DEPTH ASPHALT PAVEMENT (SEE DETAIL SHOWING METHOD OF WEDGING NO. 2)
C5	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. IN EACH OF TWO LAYERS	Y	MILLED RUMBLE STRIPS
C6	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 1" IN DEPTH OR GREATER THAN 1½" IN DEPTH		

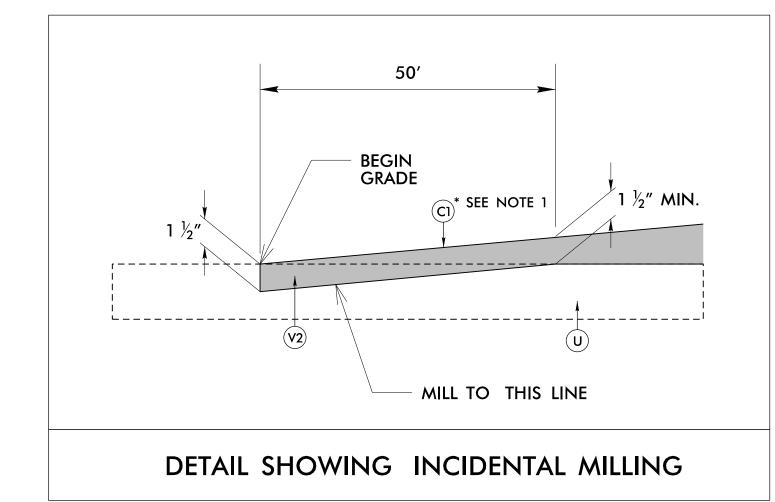

*NOTE 1: USE C4 ON -RPA-, -RPB-, -RPC-, -RPD-

-Y- STA. 23+00.00 TO STA. 23+50.00 -Y- STA. 36+50.00 TO STA. 37+00.00 -RPA- STA. 16+65.00 TO 17+15.00 -RPB- STA. 20+90.00 TO 21+40.00 -RPC- STA. 17+00.00 TO 17+50.00 -RPD- STA. 18+75.00 TO 19+25.00

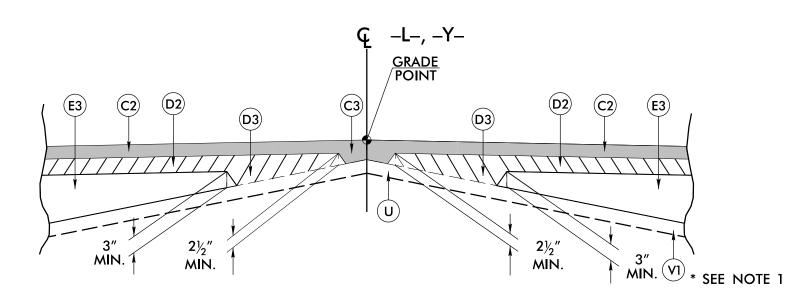

W1: Detail Showing Method of Wedging

USE THIS DETAIL IN CONJUNCTION WITH TYPICAL SECTION NO. 1 AND 4

PROJECT REFERENCE NO.

BR-0043

ROADWAY DESIGN

18470

DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED


SHEET NO.

PAVEMENT DESIGN

ENGINEER


022896

*NOTE 1: MILLING ONLY ON -L-

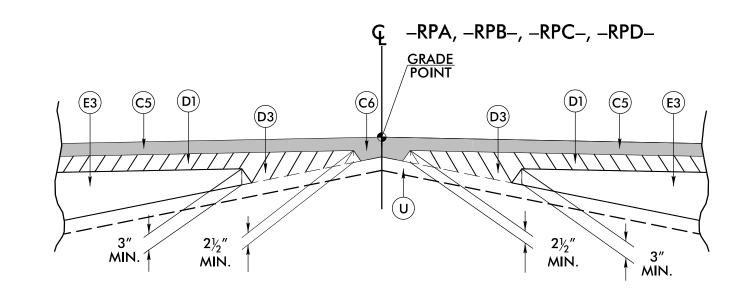

W2: Detail Showing Method of Wedging


USE THIS DETAIL IN CONJUNCTION WITH TYPICAL SECTION NO. 5 AND 7

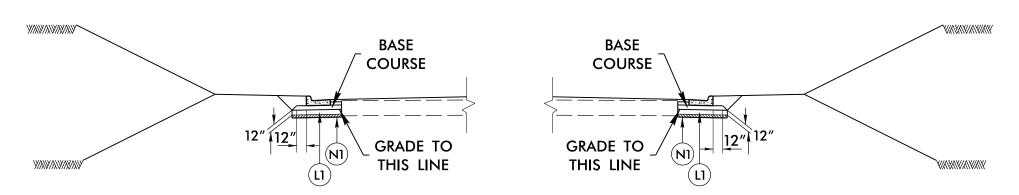

AGGREGATE SUBGRADE DETAIL

USE IN CONJUCTION WITH TYPICAL SECTIONS AS DIRECTED BY THE RESIDENT ENGINEER AND AT STATIONS:

-L- 20+25 TO 23+25 -L- 29+25 TO 39+06.56 -RPB- 20+90 TO 22+75

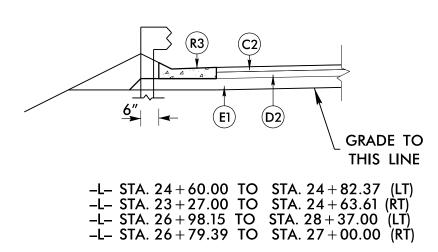

Detail Showing Shoulder Berm Gutter

PROP. APPROX. 2½" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 285 LBS. PER SQ. YD. PROP. APPROX. 4" ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. PROP. VAR. DEPTH ASPHALT CONCRETE INTERMEDIATE COURSE, TYPE I19.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 21/2" IN DEPTH OR GREATER THAN 4" IN DEPTH. PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD. PROP. APPROX. $8\frac{1}{2}$ " ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 484.5 LBS. PER SQ. YD. IN EACH OF TWO LAYERS. PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.OC, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH, TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5.5" IN DEPTH. 10" AGGREGATE BASE COURSE CLASS IV SUBGRADE STABILIZATION GEOTEXTILE FOR SOIL STABILIZATION PRIME COAT 5"MONOLITHIC ISLAND (KEYED IN). SEE STD. 852.01 SINGLE FACE CONCRETE BARRIER SHOULDER BERM GUTTER EARTH MATERIAL

NOTE: PAVEMENT EDGE SLOPES ARE 1:1 UNLESS SHOWN OTHERWISE