
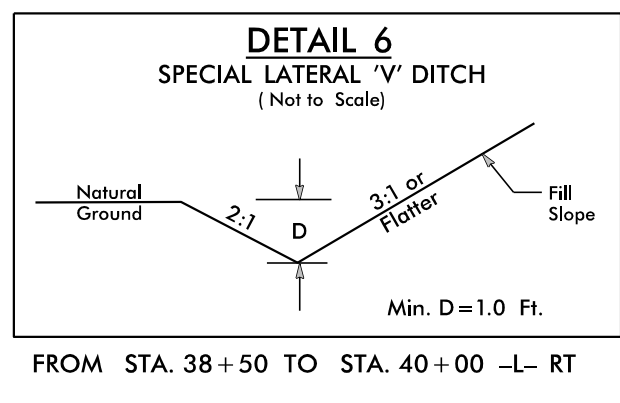
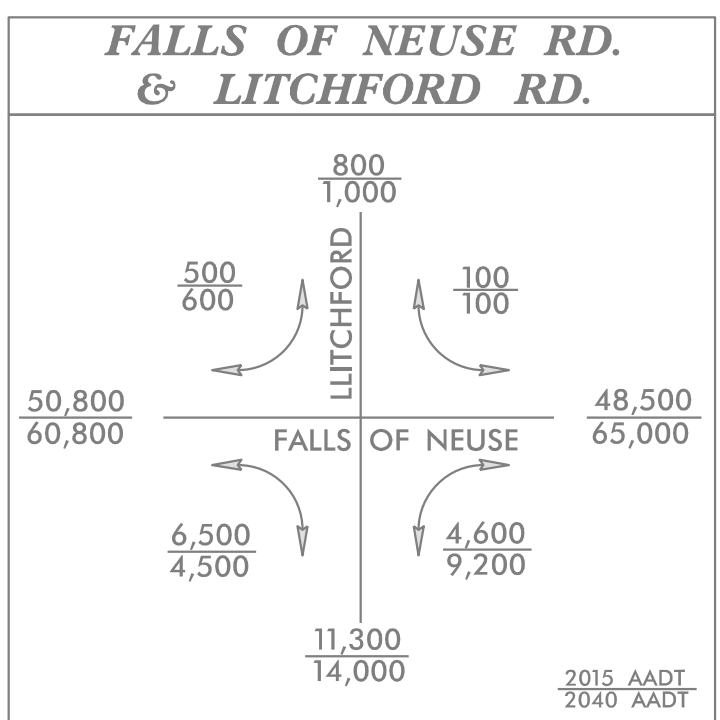
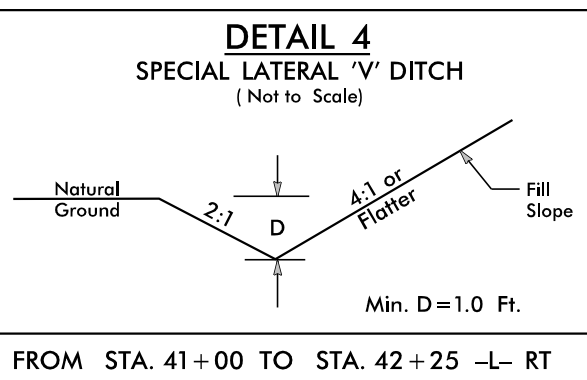


PROJECT REFERENCE NO.	SHEET NO.
U-5826	EC-06/CONST.06
RW SHEET NO.	
ROADWAY DESIGN ENGINEER	HYDRAULICS ENGINEER

CLEARING AND GRUBBING
EROSION CONTROL FOR
CONSTRUCTION SHEET 06

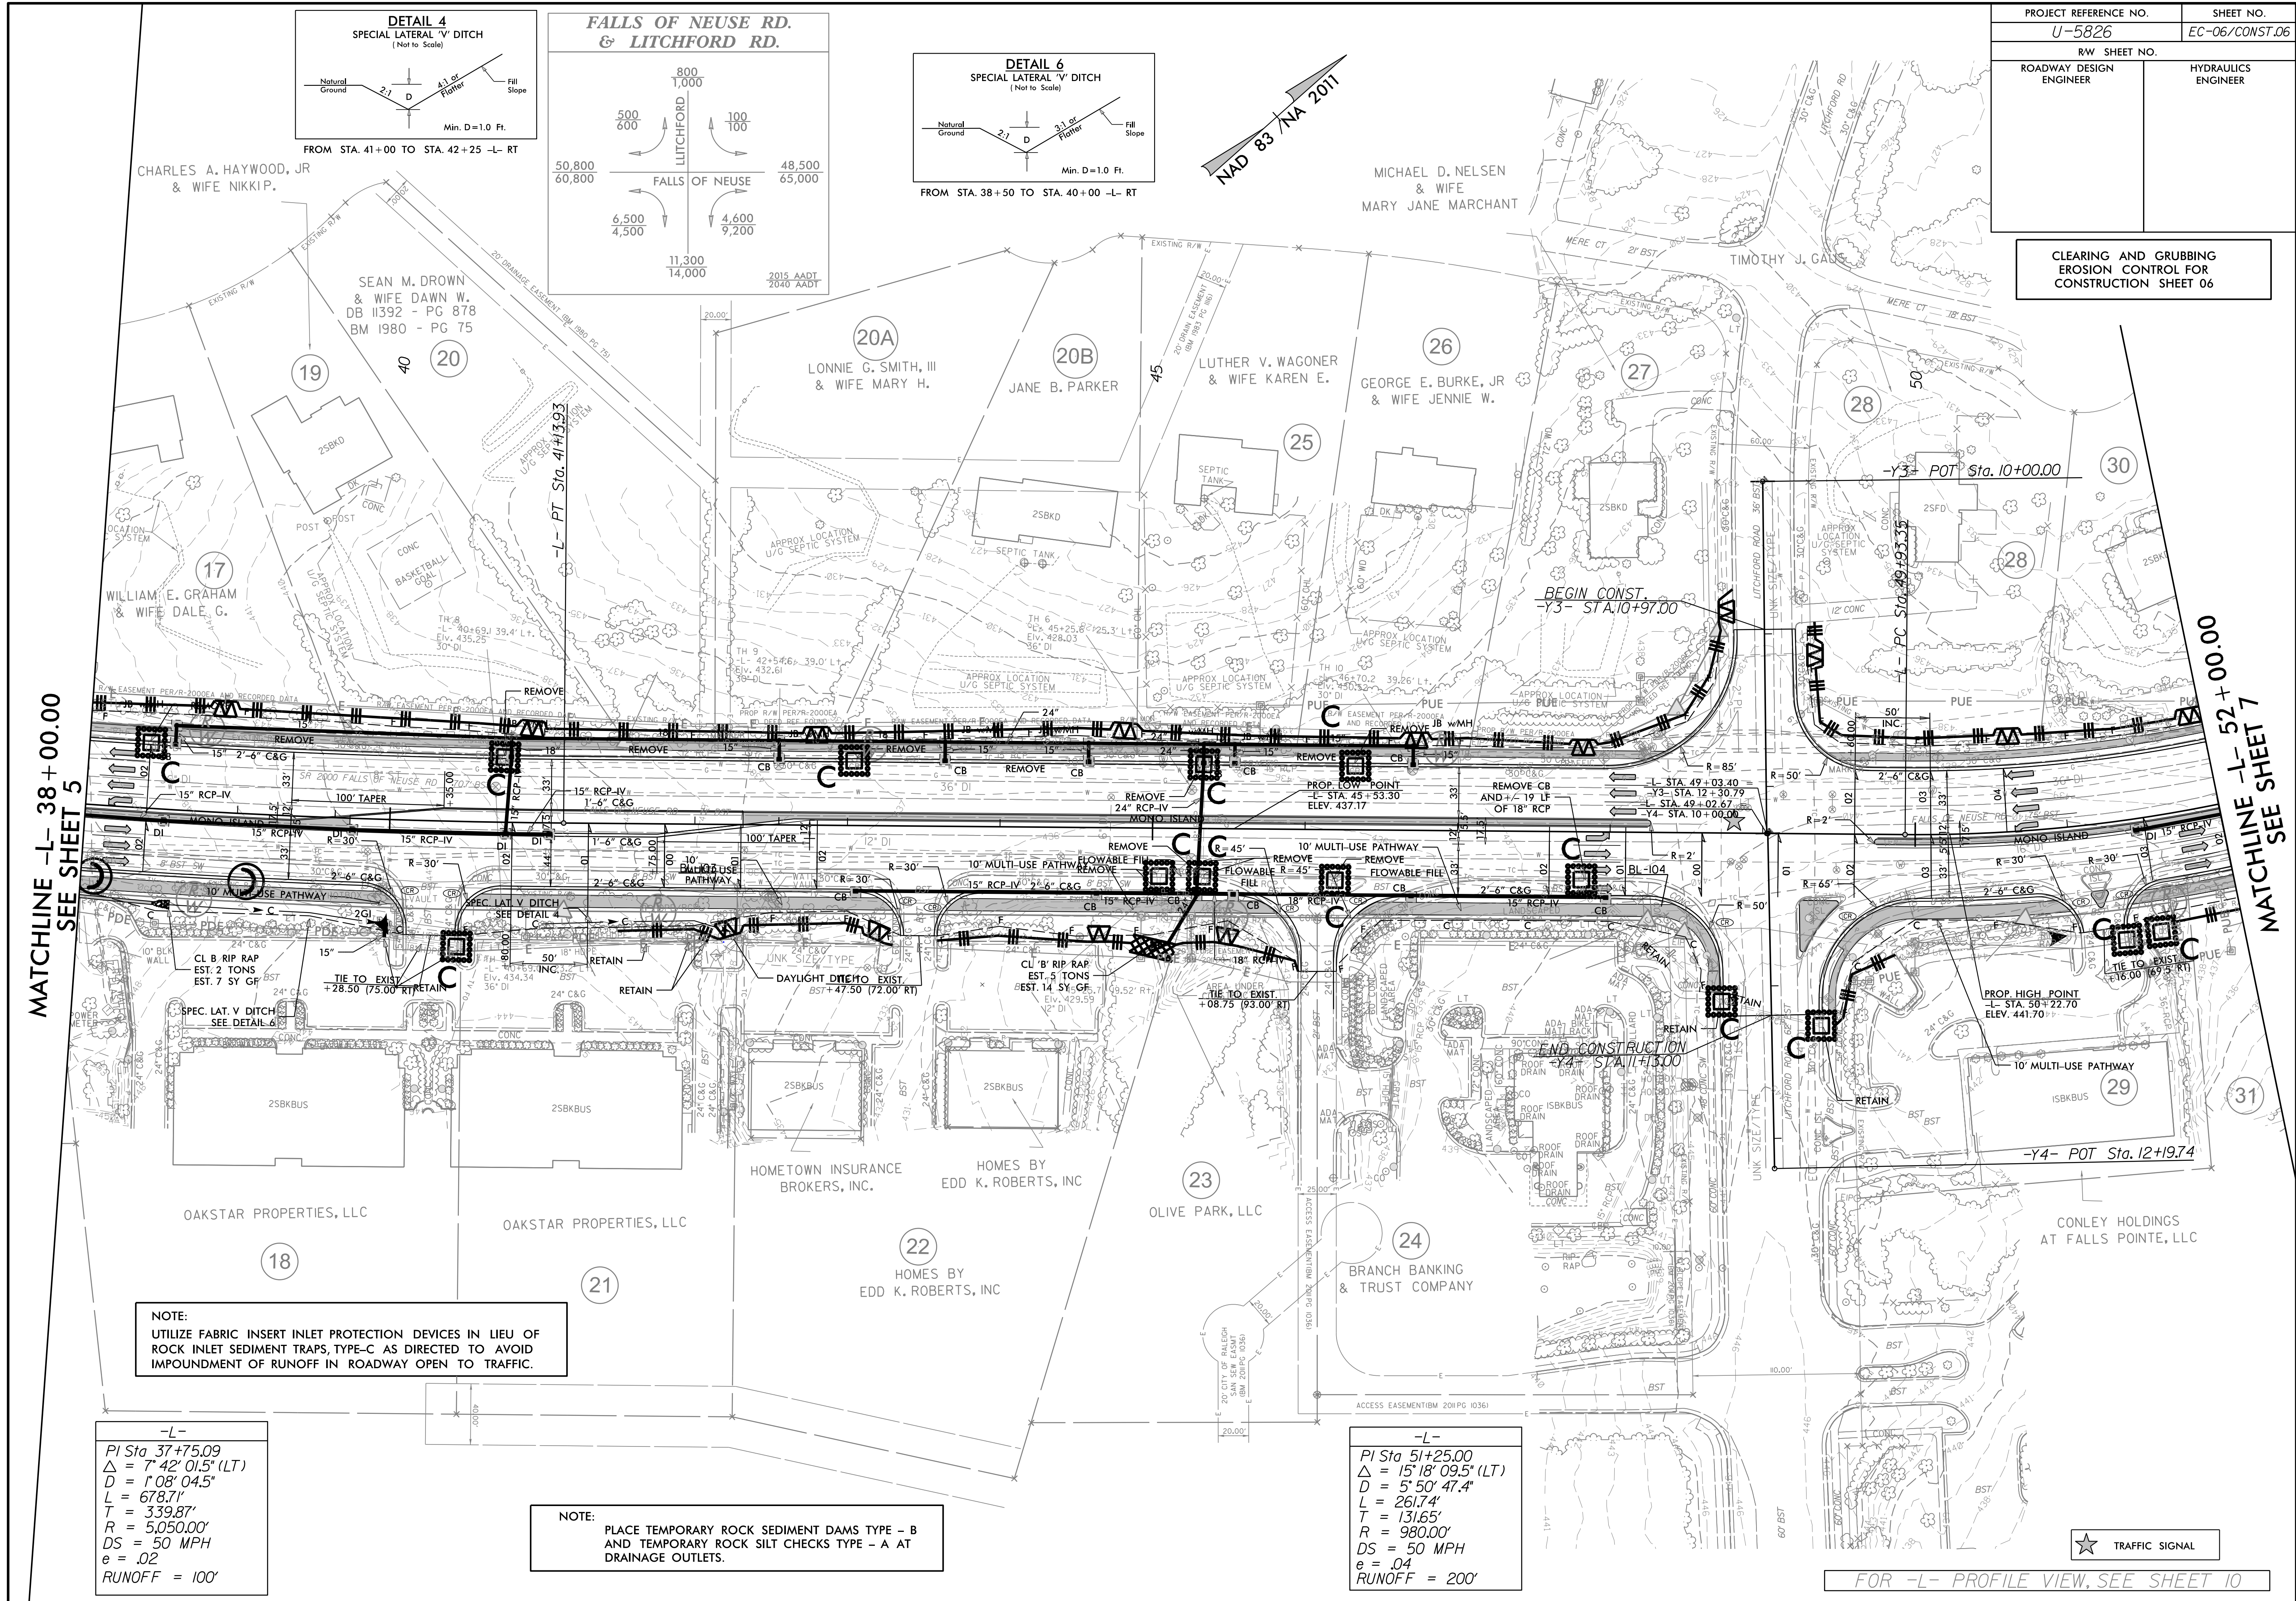

MATCHLINE -L- 38+00.00
SEE SHEET 5

MATCHLINE -L- 52+00.00
SEE SHEET 7

NOTE:
UTILIZE FABRIC INSERT INLET PROTECTION DEVICES IN LIEU OF
ROCK INLET SEDIMENT TRAPS, TYPE-C AS DIRECTED TO AVOID
IMPOUNDMENT OF RUNOFF IN ROADWAY OPEN TO TRAFFIC.

NOTE:
PLACE TEMPORARY ROCK SEDIMENT DAMS TYPE - B
AND TEMPORARY ROCK SILT CHECKS TYPE - A AT
DRAINAGE OUTLETS.

-L-
PI Sta 37+75.09
Δ = 7' 42" 01.5" (LT)
D = 1' 08" 04.5"
L = 678.71'
T = 339.87'
R = 5,050.00'
DS = 50 MPH
e = .02
RUNOFF = 100'

-L-
PI Sta 51+25.00
Δ = 15' 18" 09.5" (LT)
D = 5' 50" 47.4"
L = 261.74'
T = 131.65'
R = 980.00'
DS = 50 MPH
e = .04
RUNOFF = 200'

FOR -L- PROFILE VIEW, SEE SHEET 10

★ TRAFFIC SIGNAL