
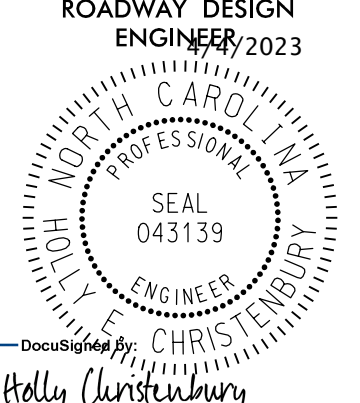
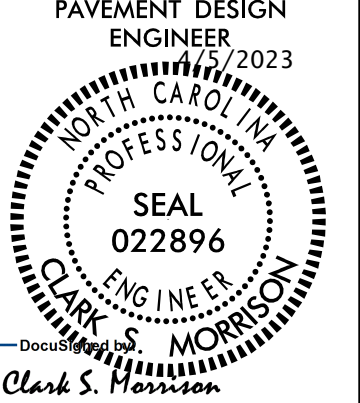
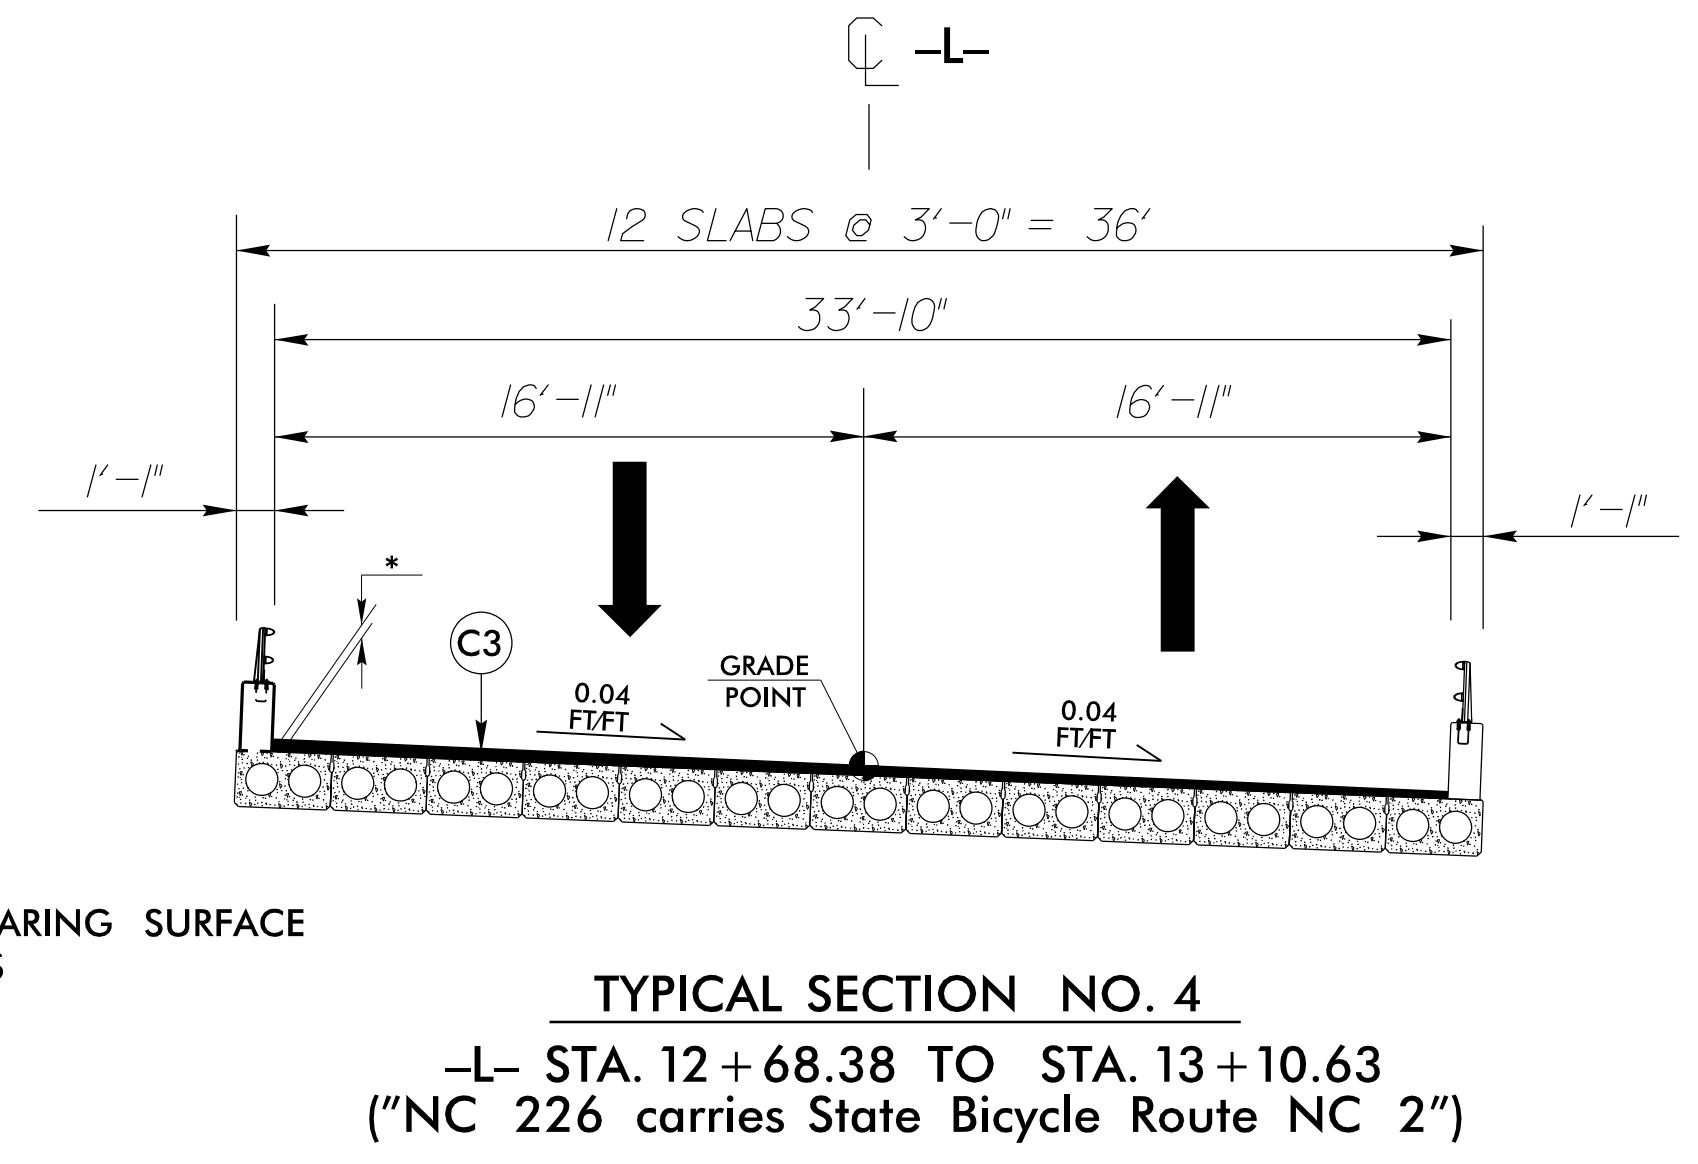
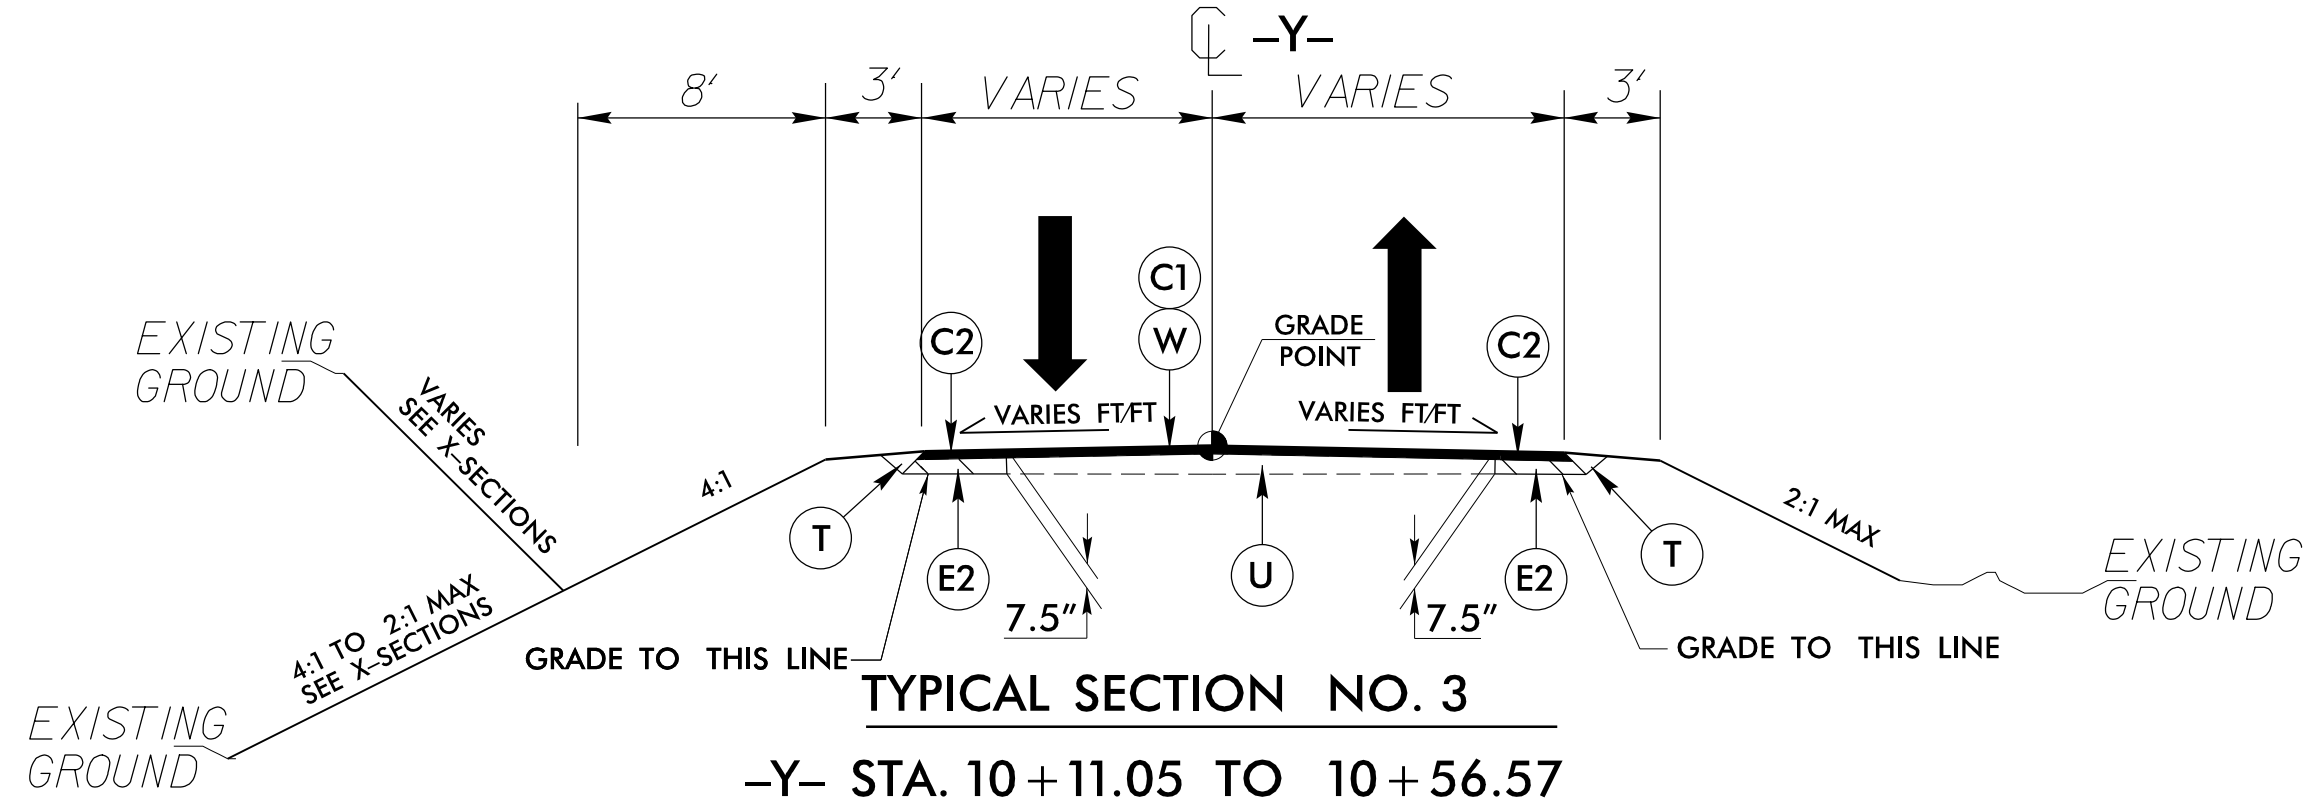
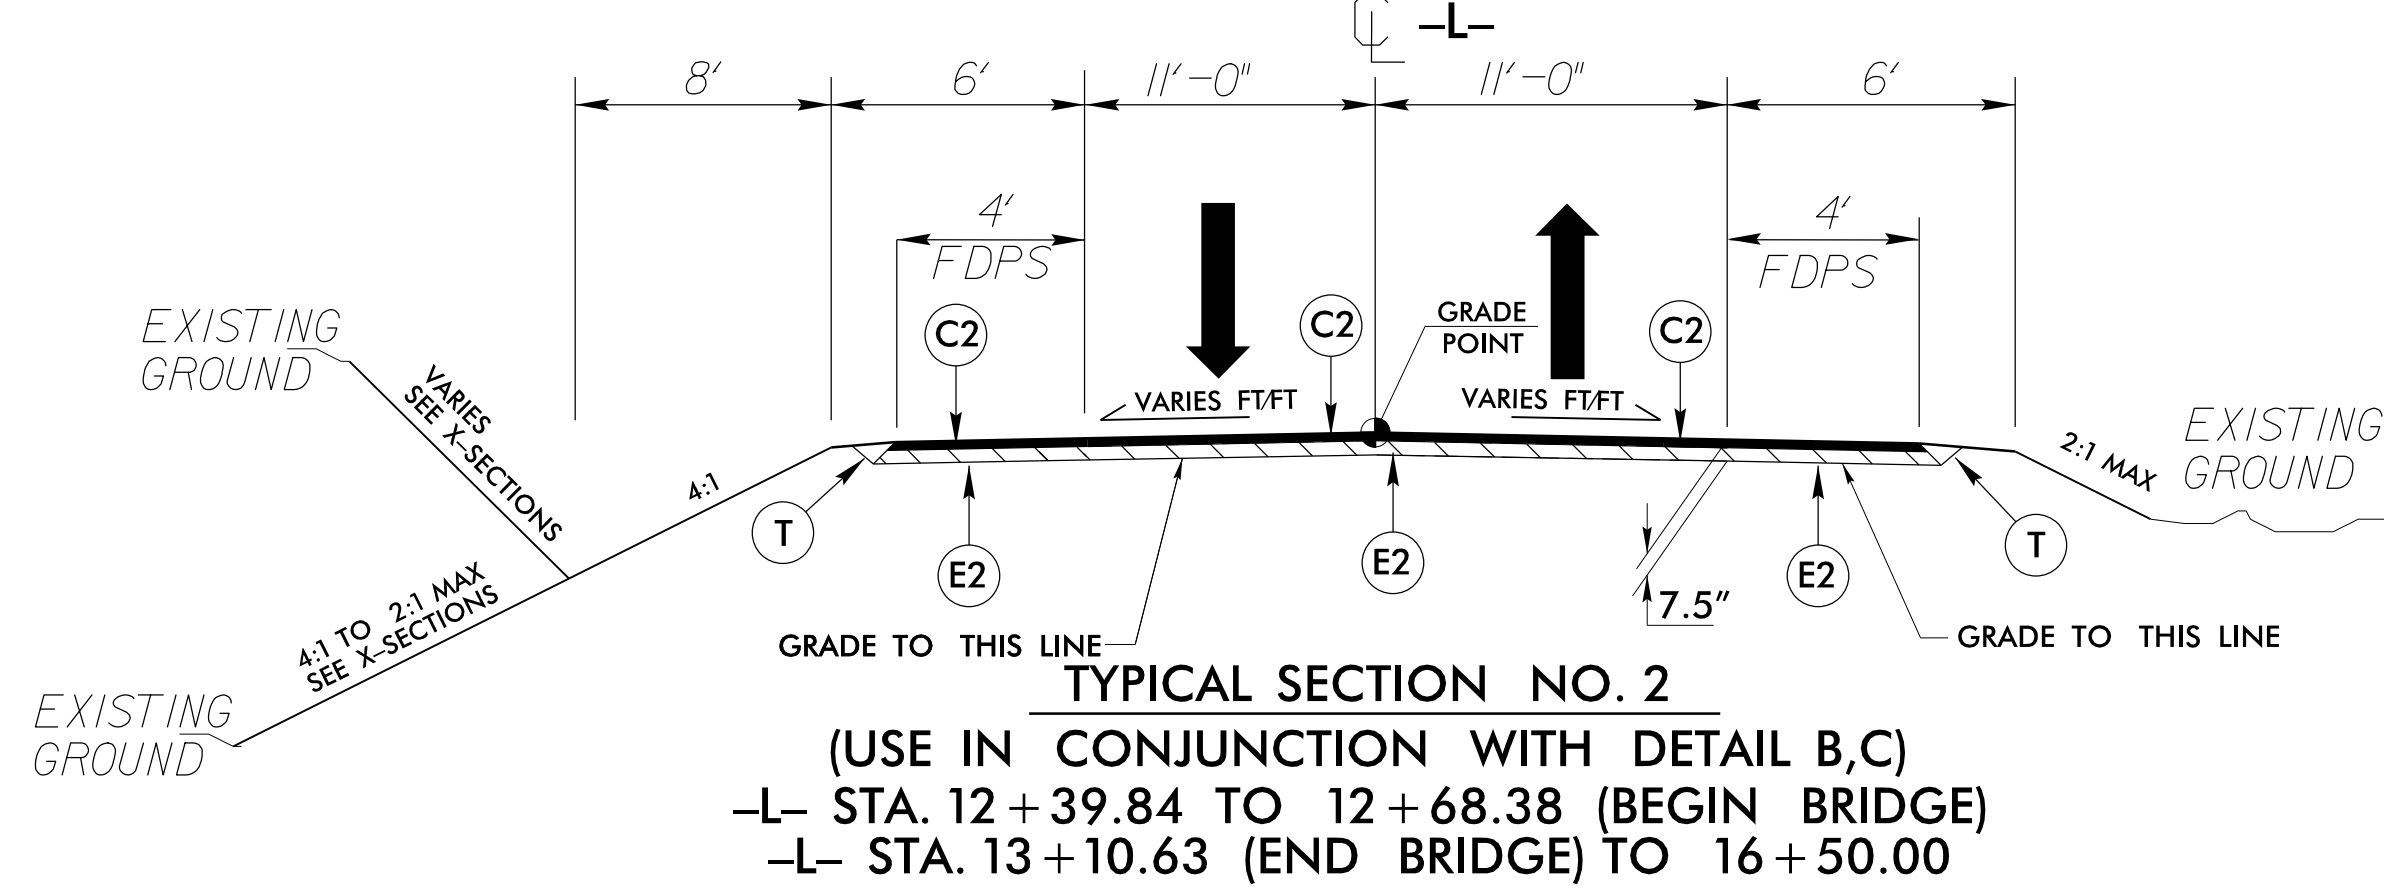
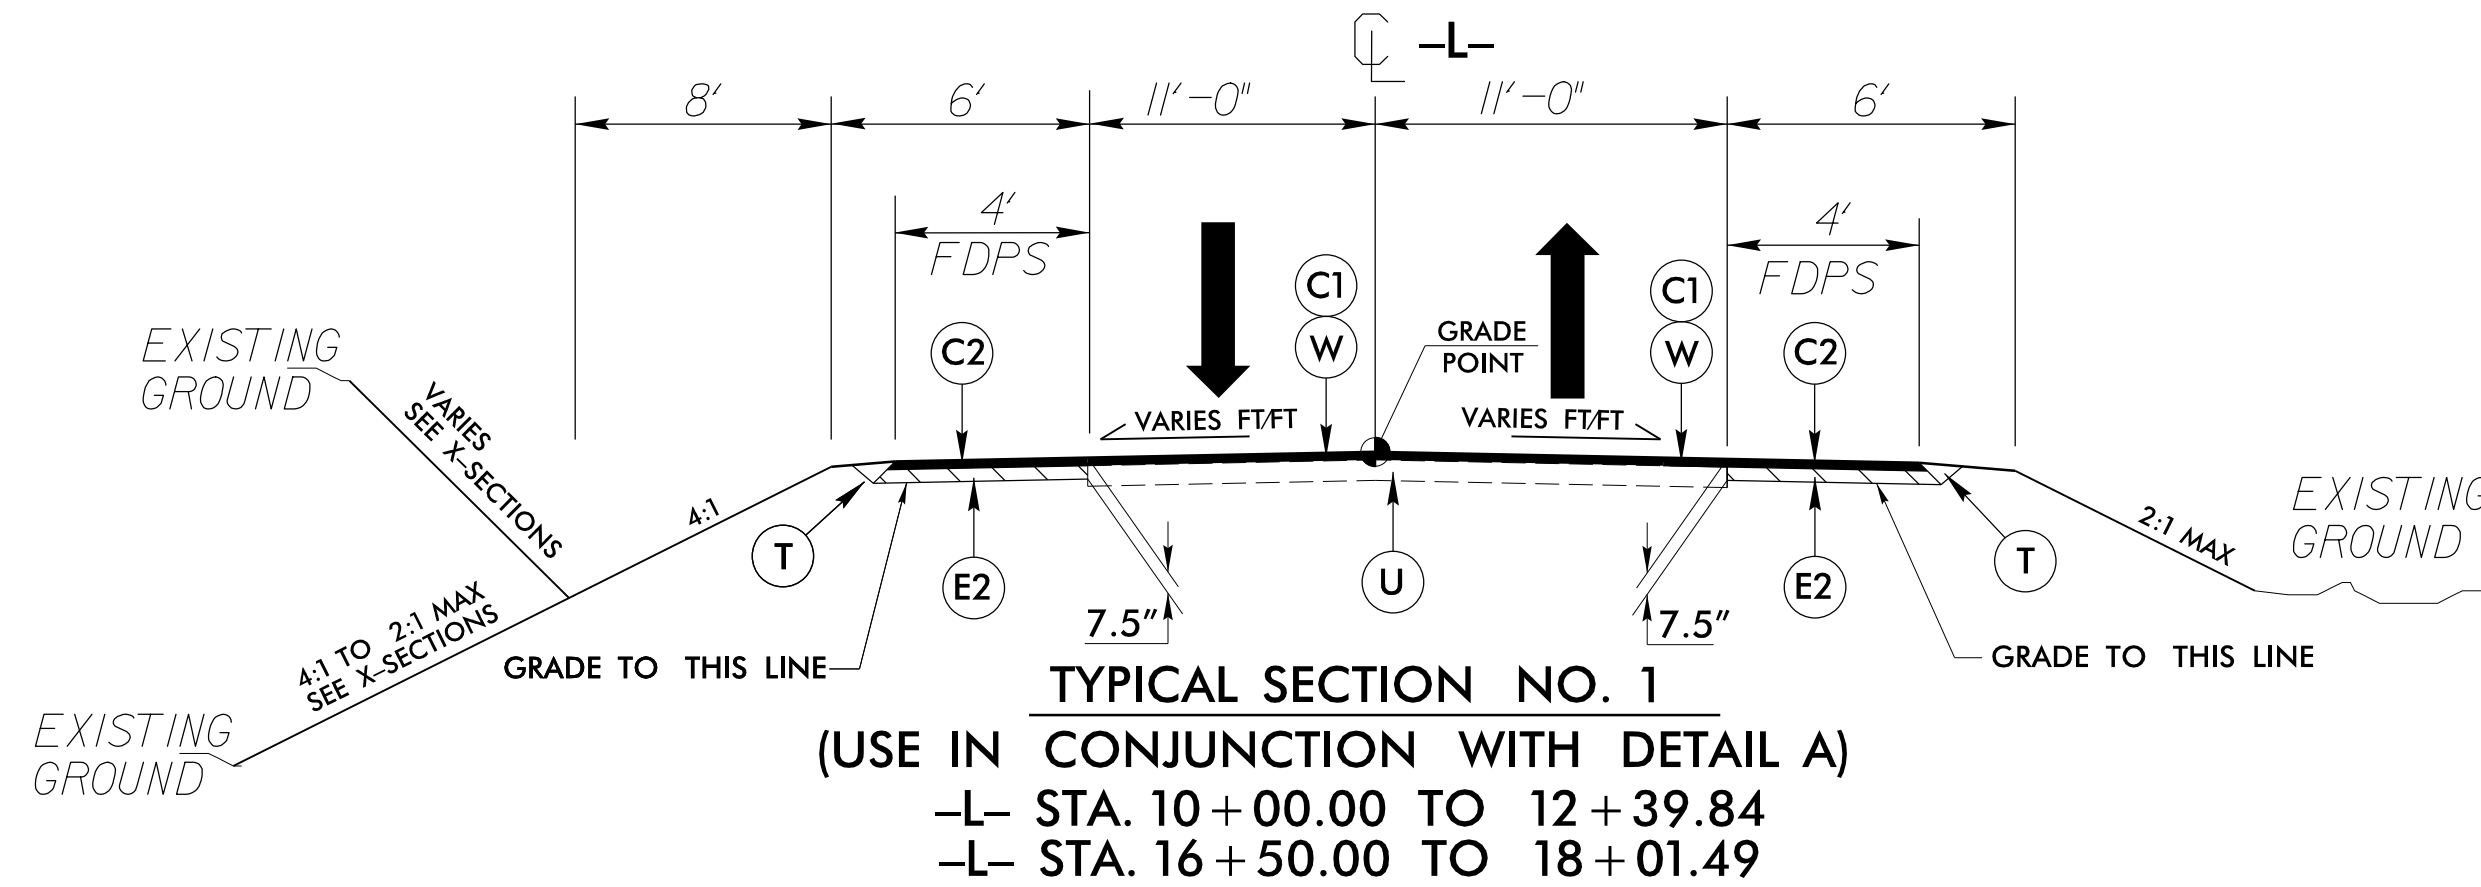





8/17/99

PLANS PREPARED BY:

 WSP USA
 454 YAMETTEVILLE STREET
 SUITE 1500
 RALEIGH, NC 27601
 TEL: 919.836.4040
 FAX: 919.836.4099
 LICENSE NO. F-0165

PROJECT REFERENCE NO. B-5893	SHEET NO. 2A-1
RW SHEET NO.	
ROADWAY DESIGN ENGINEER 2023  Holly Christenbury	PAVEMENT DESIGN ENGINEER 2023  Clark S. Morrison
DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED	

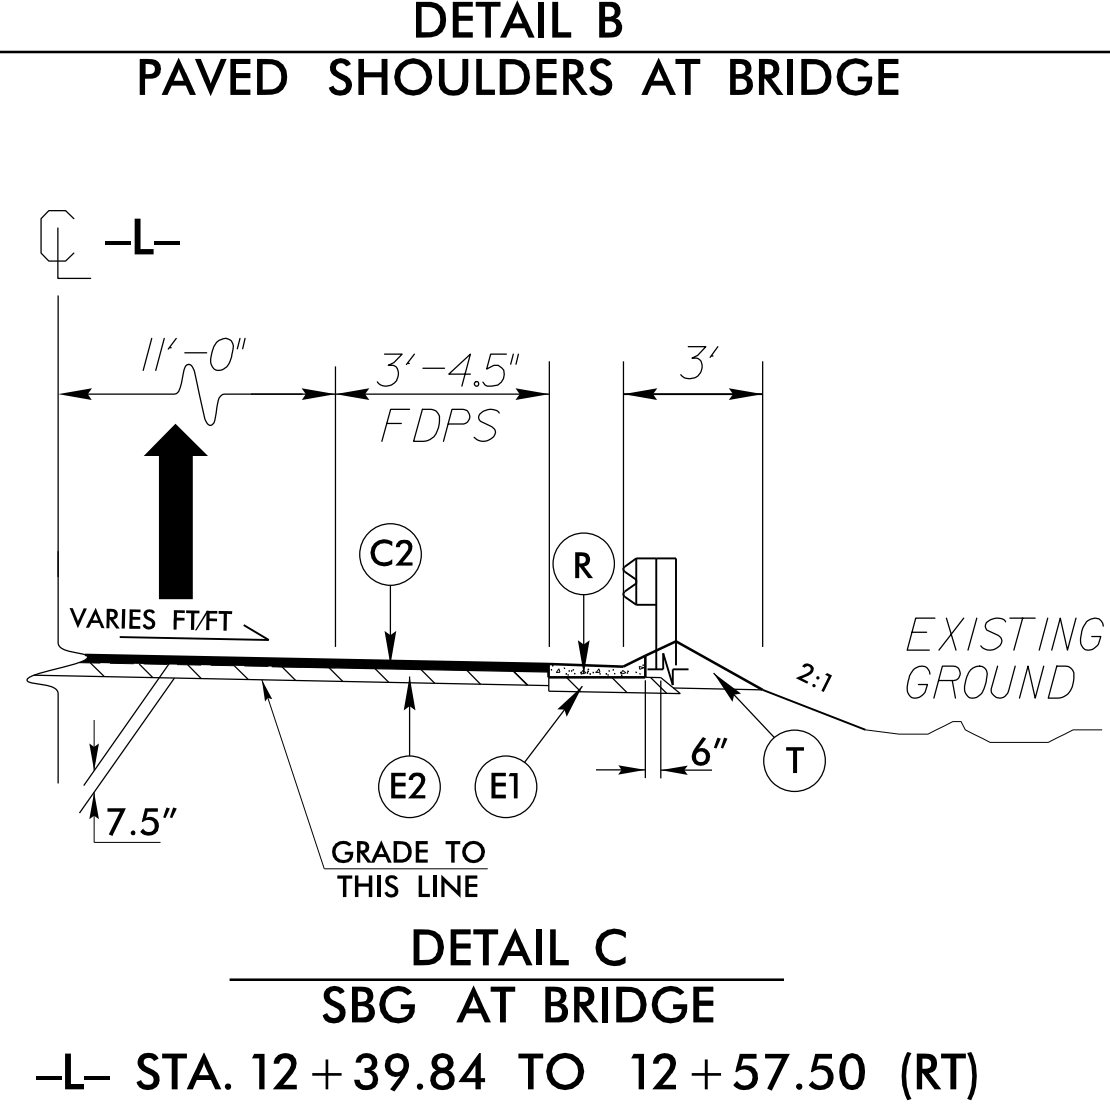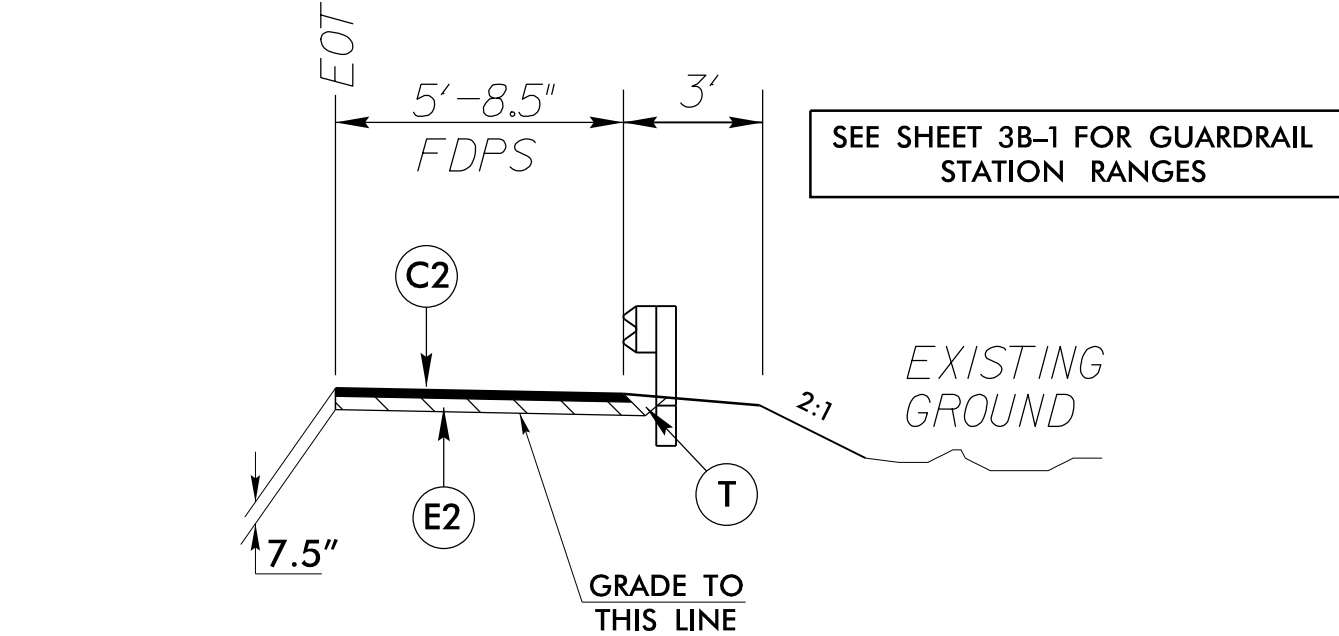
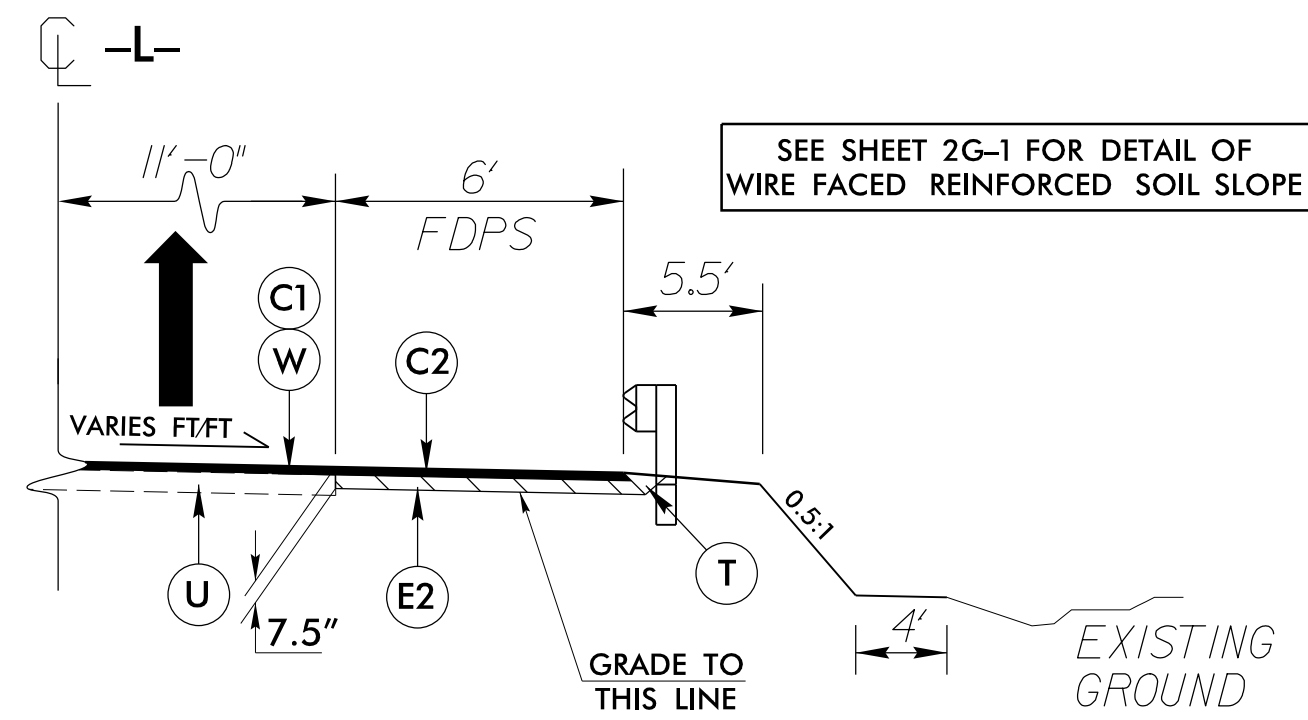


*VARIABLE ASPHALT WEARING SURFACE
 SEE STRUCTURES PLANS



FINAL PAVEMENT SCHEDULE	
C1	PROP. APPROX. 1.5" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD.
C2	PROP. APPROX. 3" ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 165 LBS. PER SQ. YD. IN EACH OF TWO LAYERS.
C3	PROP. VAR. DEPTH ASPHALT CONCRETE SURFACE COURSE, TYPE S9.5B, AT AN AVERAGE RATE OF 110 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 1" IN DEPTH OR GREATER THAN 1 1/2" IN DEPTH.
E1	PROP. APPROX. 4" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 456 LBS. PER SQ. YD.
E2	PROP. APPROX. 4.5" ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 513 LBS. PER SQ. YD.
E3	PROP. VAR. DEPTH ASPHALT CONCRETE BASE COURSE, TYPE B25.0C, AT AN AVERAGE RATE OF 114 LBS. PER SQ. YD. PER 1" DEPTH TO BE PLACED IN LAYERS NOT LESS THAN 3" IN DEPTH OR GREATER THAN 5 1/2" IN DEPTH.
R	SHOULDER BERM GUTTER
T	EARTH MATERIAL.
U	EXISTING PAVEMENT.
W	WEDGING (DETAIL 1).

NOTES:
 1. ALL PAVEMENT SLOPES ARE 1:1 UNLESS OTHERWISE NOTED.

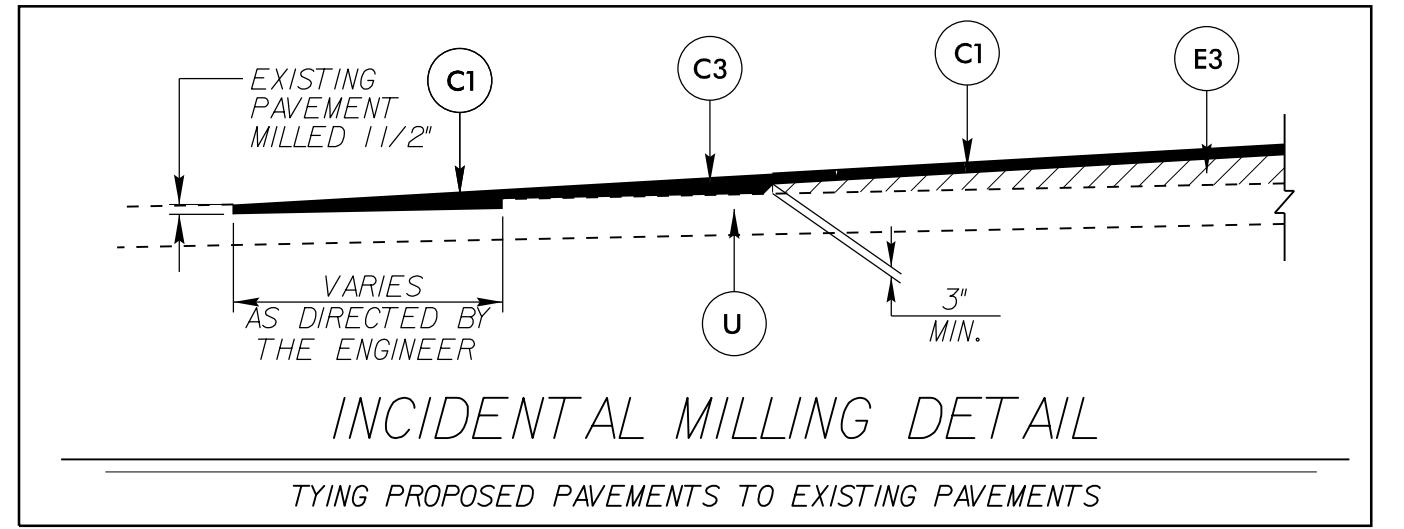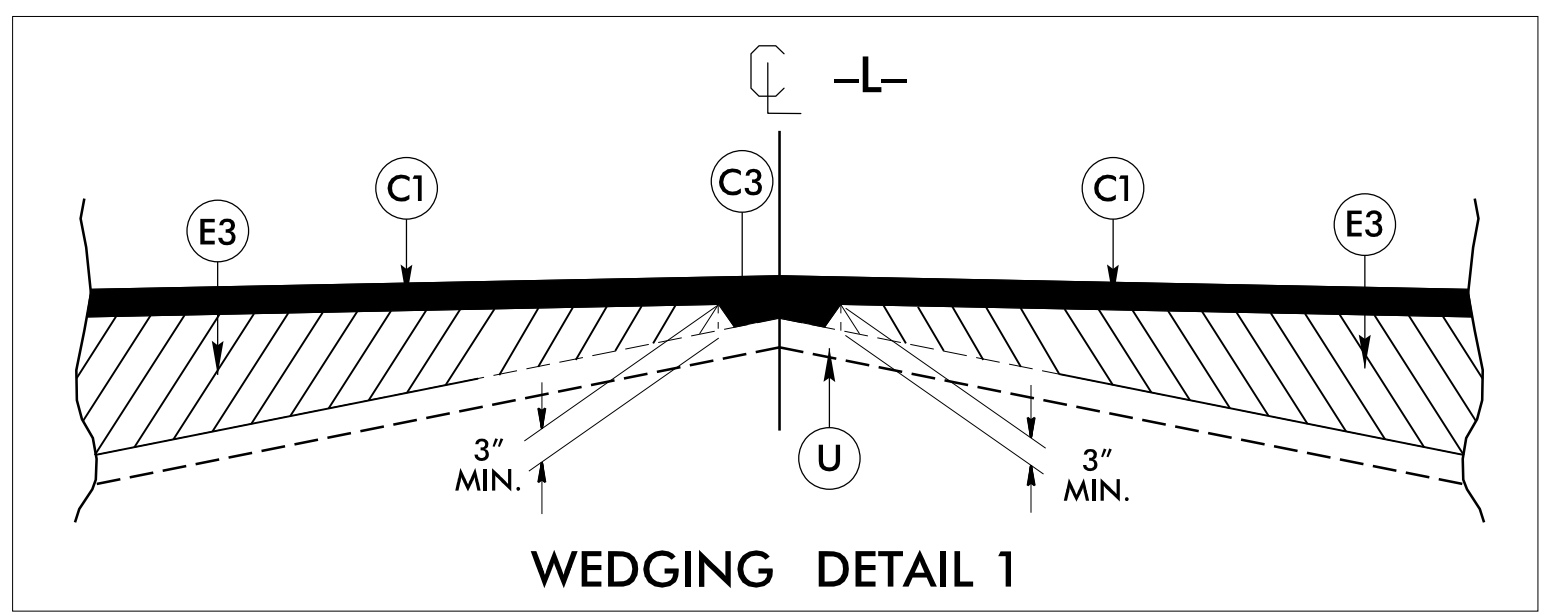

REVISIONS

20-MAR-2023 10:51:18 AM
 C:\p\roadway\p\01\B5893.Rdw_tup.dgn
 WSP