



**STATE OF NORTH CAROLINA  
DEPARTMENT OF TRANSPORTATION**

**SIGNING PLAN  
GUILFORD COUNTY**

**LOCATION: BRIDGE NO. 208 OVER LITTLE ALAMANCE CREEK ON SR 3051 (KNOX RD)**

PROJECT REFERENCE NO. B-4961	SHEET NO. SIGN-1
APPROVED:  0698D7A8577CADC...	
DATE: 2/25/2016	
SEAL 	
<b>DOCUMENT NOT CONSIDERED FINAL UNLESS ALL SIGNATURES COMPLETED</b>	

**T.I.P.: B-4961**

**CONTRACT: C203808**

**GENERAL NOTES**

- . SIGNS FURNISHED BY STATE
- . CONFIRM IN WRITING AT LEAST 4 MONTHS IN ADVANCE, THE ACTUAL DATE THE DEPARTMENT FURNISHED SIGNS WILL BE REQUIRED.
- . ALL TYPE 'D' SIGNS SHALL BE MOUNTED ON TWO U-CHANNEL POSTS UNLESS OTHERWISE INDICATED ON THE PLANS.
- . IF REMOVAL OR RELOCATION OF SIGNS ON PRIVATE STREET (NON-STATE MAINTAINED) IS REQUIRED DUE TO CONSTRUCTION, THE CONTRACTOR SHALL INFORM THE ENGINEER. THE WORK WILL BE COMPLETED BY OTHERS.
- . WHEN NOT STATIONED OR DIMENSIONED ON PLANS, ALL 'E' AND 'F' SIGNS SHALL BE FIELD LOCATED BY THE ENGINEER
- . ALL EXISTING SIGNS ON "U" CHANNEL POST WITHIN THE PROJECT LIMITS SHALL BE REMOVED AND DISPOSED OF UNLESS OTHERWISE NOTED ON PLANS.
- . WHEN EXISTING SIGNS ARE REMOVED AND INSTALLED ON NEW SUPPORTS, THE RE-ERECTION SHALL IMMEDIATELY FOLLOW THE REMOVAL.
- . THE BACKGROUND FOR TYPE E & F SIGNS SHALL BE TYPE C REFLECTIVE SHEETING.
- . SEE ROADWAY PLANS FOR GUARD/GUIDE RAIL DETAILS.

**SUMMARY OF QUANTITIES**

ITEM NO.		ITEM DESCRIPTION	QUANTITY	UNIT
DESC. NO.	SECT. NO.			
4072000000	903	SUPPORTS, 3 LB STEEL U-CHANNEL	90	L.F.
4096000000	904	SIGN ERECTION, TYPE D	2	EA.
4102000000	904	SIGN ERECTION, TYPE E	1	EA.
4155000000	907	DISPOSAL OF SIGN SYSTEM, U-CHANNEL	7	EA.

**ROADWAY STANDARD DRAWING**


THE FOLLOWING ROADWAY STANDARDS AS APPEAR IN "ROADWAY STANDARD DRAWINGS" - PROJECT SERVICES UNIT - N.C. DEPARTMENT OF TRANSPORTATION - RALEIGH, N.C., DATED JANUARY 2012 ARE APPLICABLE TO THIS PROJECT AND BY REFERENCE HEREBY ARE CONSIDERED A PART OF THESE PLANS:

STD. NO.	TITLE
904.10	ORIENTATION OF GROUND MOUNTED SIGNS
904.50	MOUNTING OF TYPE 'D', 'E' AND 'F' SIGNS ON 'U' CHANNEL POSTS


PLAN PREPARED BY: N.C.D.O.T. SIGNING AND DELINEATION UNIT

RENEE B. ROACH, P.E. SIGNING & DELINEATION REGIONAL ENGINEER

STACEY W. JOHNS SIGNING & DELINEATION DESIGN ENGINEER

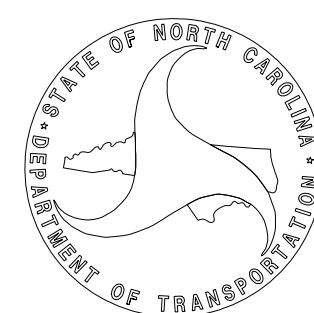

SIGN NUMBER: 301,302 TYPE: D QUANTITY: 2 SIGN WIDTH: 4'-0" HEIGHT: 3'-0" TOTAL AREA: 12.0 Sq.Ft.	BACKG COLOR: Green COPY COLOR: White SYMBOL X Y WID HT BORDER TYPE: FLUSH RECESS: 0" WIDTH: 0.75" RADII: 3" MAT'L: 0.125" (3.2 mm) ALUMINUM	DESIGN BY: S JOHNS PROJECT ID: B-4961	CHECKED BY: R ROACH LOCATION: GUILFORD CO. - SR 3051(KNOX RD)	Feb 08, 2016 DIV: 7
---	---	--	--	------------------------

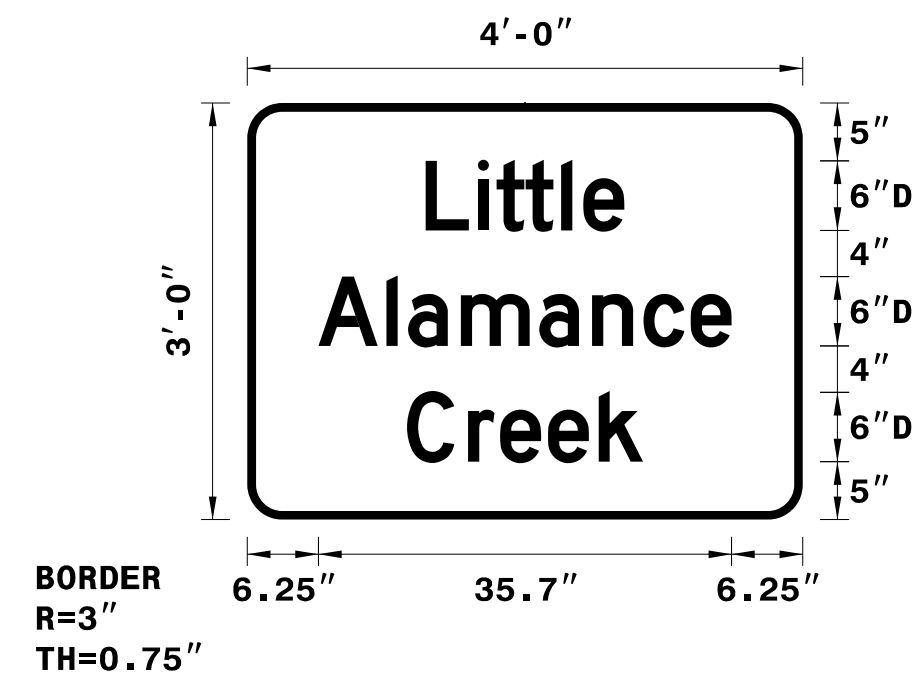


Spacing Factor is 1 unless specified otherwise

Letter positions											Series/Size
Letter spacings are to start of next letter											Text Length
L	i	t	t	l	e						D 2000
15.4	4.5	1.6	2.5	3.1	1.9	3.5	15.4				17.2
A	l	a	m	a	n	c	e				D 2000
6.2	5.9	1.9	4.6	6.8	4.6	4.4	4.1	3.5	6.1		35.7
c	r	e	e	k							D 2000
13.8	5.3	2.8	4.1	4.4	3.8	13.8					20.4

FILENAME: Sign Design NORTH CAROLINA D.O.T. SIGN DETAIL

**'E' SIGN**

401 QUANTITY REQ'D 1

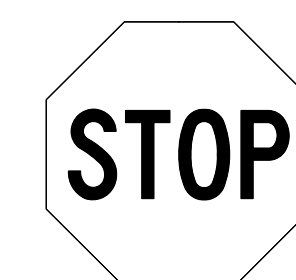

36 X 36  
R1-1

ONE "U" POST PER SIGN

**INDEX**

SHEET NO.	DESCRIPTION
SIGN-1	TITLE SHEET
SIGN-2	E SHEETS
SIGN-3	SIGN DETAIL SHEET